



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
YALE UB1753 FL-3 (S/N D875V16726W)

Component
Diesel Engine

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0033011	---	---
Sample Date		Client Info		12 Feb 2024	---	---
Machine Age	hrs	Client Info		527	---	---
Oil Age	hrs	Client Info		527	---	---
Filter Age	hrs	Client Info		527	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>100	20	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	7	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	100	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	21	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		9	---	---
Boron	ppm	ASTM D5185m		78	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		103	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		94	---	---
Calcium	ppm	ASTM D5185m		2988	---	---
Phosphorus	ppm	ASTM D5185m		1231	---	---
Zinc	ppm	ASTM D5185m		1533	---	---
Sulfur	ppm	ASTM D5185m		6145	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.8	---	---
Visc @ 100°C	cSt	ASTM D445		12.6	---	---

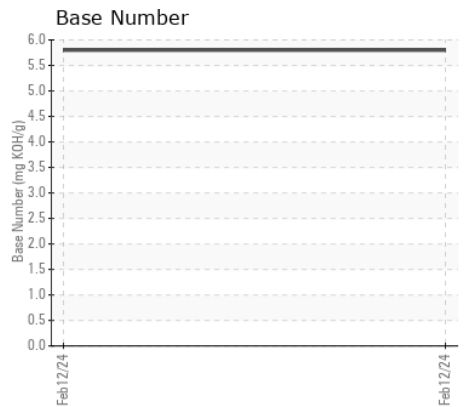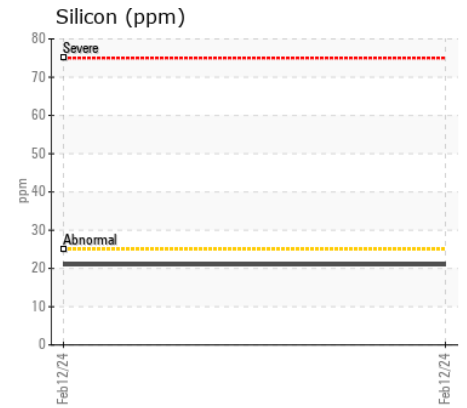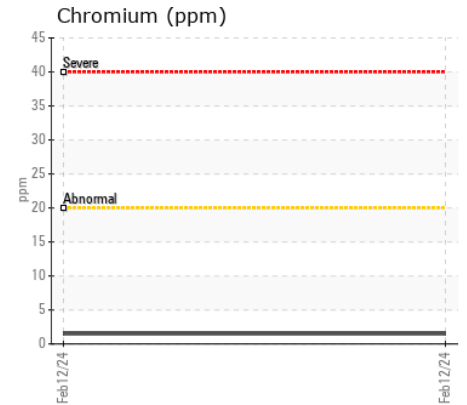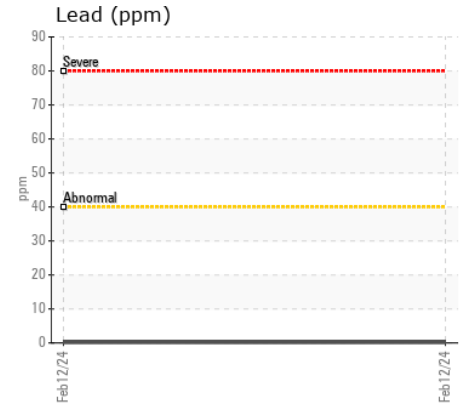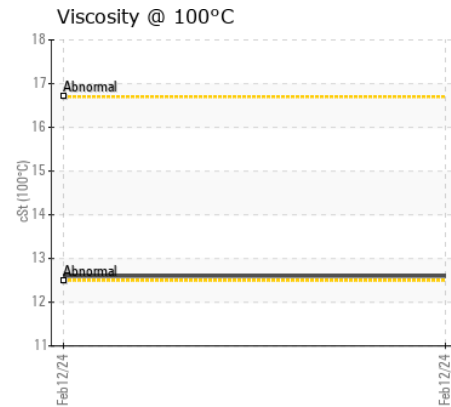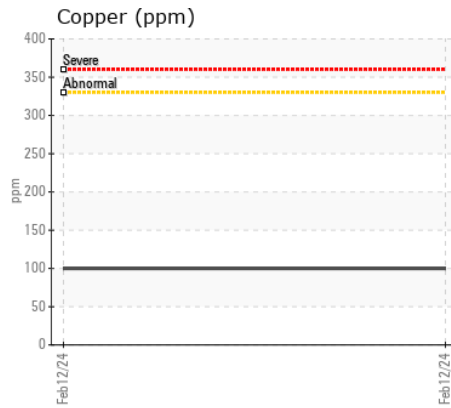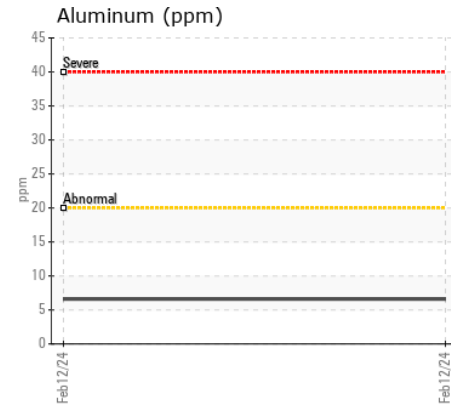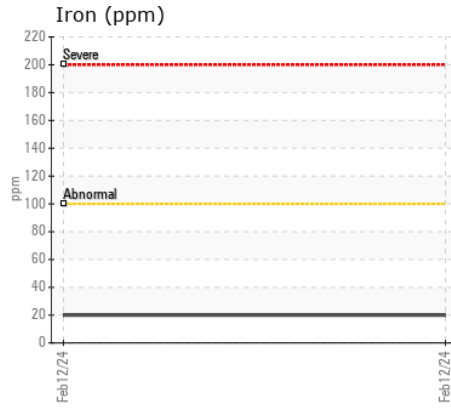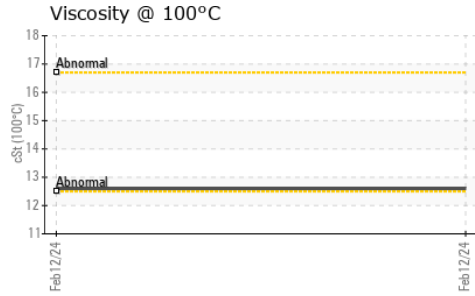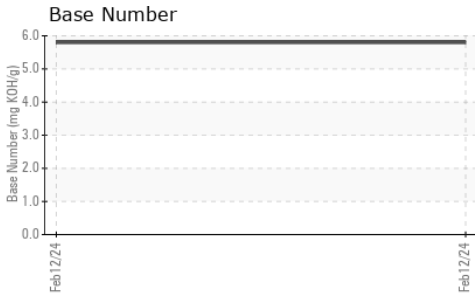

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0033011 **Received** : 29 Feb 2024
Lab Number : 06104017 **Tested** : 29 Feb 2024
Unique Number : 10902247 **Diagnosed** : 29 Feb 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

CONSERVIT INC.
 PO BOX 1517
 HAGERSTOWN, MD
 US 21740
 Contact: DON LONG

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (301)791-0100

F: (301)739-8548