WEAR CONTAMINATION **FLUID CONDITION**

NORMAL NORMAL NORMAL


WCLSNC

QC230801DE

Component Diesel Engine

PETRO CANADA DURON SHP 15W40 (--- GAL)

PETRO CANADA DURON SHP 15W40 (GAL)	!						
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Resample at the next service interval to monitor.	Sample Number		Client Info		WC0906345	WC0906344	WC090634
	Sample Date		Client Info		29 Feb 2024	28 Feb 2024	27 Feb 20
	Machine Age	hrs	Client Info		0	0	0
	Oil Age	hrs	Client Info		0	0	0
	Filter Age	hrs	Client Info		0	0	0
	Oil Changed		Client Info		N/A	N/A	N/A
	Filter Changed		Client Info		N/A	N/A	N/A
	Sample Status				NORMAL		
WEAR	Iron	ppm	ASTM D5185m	>11	8	8	10
	Chromium	ppm	ASTM D5185m	>3	<1	<1	<1
All component wear rates are normal.	Nickel	ppm	ASTM D5185m	>2	<1	0	0
	Titanium	ppm	ASTM D5185m		0	0	0
	Silver	ppm	ASTM D5185m		0	0	0
	Aluminum	ppm	ASTM D5185m		2	2	2
	Lead	ppm	ASTM D5185m		- <1	<1	0
	Copper	ppm	ASTM D5185m		4	3	4
	Tin	ppm	ASTM D5185m		<1	<1	0
	Vanadium	ppm	ASTM D5185m		<1	0	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NON
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NON
CONTAMINATION	Silicon	ppm	ASTM D5185m	>14	4	5	4
	Potassium	ppm	ASTM D5185m	>20	2	1	2
There is no indication of any contamination in the oil.	Fuel	%	ASTM D3524	>4.1	2.4	2.5	2.4
	Water	%	ASTM D6304	>0.2	NEG	NEG	NEG
	Glycol	%	*ASTM D2982		NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>0.3	0.1	0.1	0.1
	Nitration	Abs/cm	*ASTM D7624	>10.8	10.4	10.3	10.3
	Sulfation	Abs/.1mm	*ASTM D7415	>20.8	20.0	20.0	20.3
	Silt	scalar	*Visual	NONE	NONE	NONE	NON
	Debris	scalar	*Visual	NONE	NONE	NONE	NON
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NON
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORN
	Odor	scalar	*Visual	NORML	NORML	NORML	NOR
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>13	6	6	7
EGID GONDITION	Boron	ppm	ASTM D5185m		6	6	6
The BN result indicates that there is suitable alkalinity remaining in the	Barium	ppm	ASTM D5185m		0	0	0
oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.	Molybdenum	ppm	ASTM D5185m		50	<u>4</u> 7	6 0
	Manganese	ppm	ASTM D5185m		<1	0	0
	Magnesium	ppm	ASTM D5185m		635	543	1 746
	Calcium	ppm	ASTM D5185m		1740	1539	▲ 1945
	Phosphorus	ppm	ASTM D5185m		758	704	▲ 945
	Zinc	ppm	ASTM D5185m		1101	933	▲ 1350
	Sulfur	ppm	ASTM D5185m		2525	2372	3311
	Oxidation	Abs/.1mm	*ASTM D7414		17.5	17.5	17.3
	Acid Number (AN)				0.37	1.67	2.10
	Base Number (BN)		ASTM D2896		7.17	7.20	7.35
	Visc @ 40°C	cSt	ASTM D445		98.7	98.4	100
	1.00 @ 10 0						
	Visc @ 100°C	cSt	ASTM D445	15.4	13.3	13.5	13.4

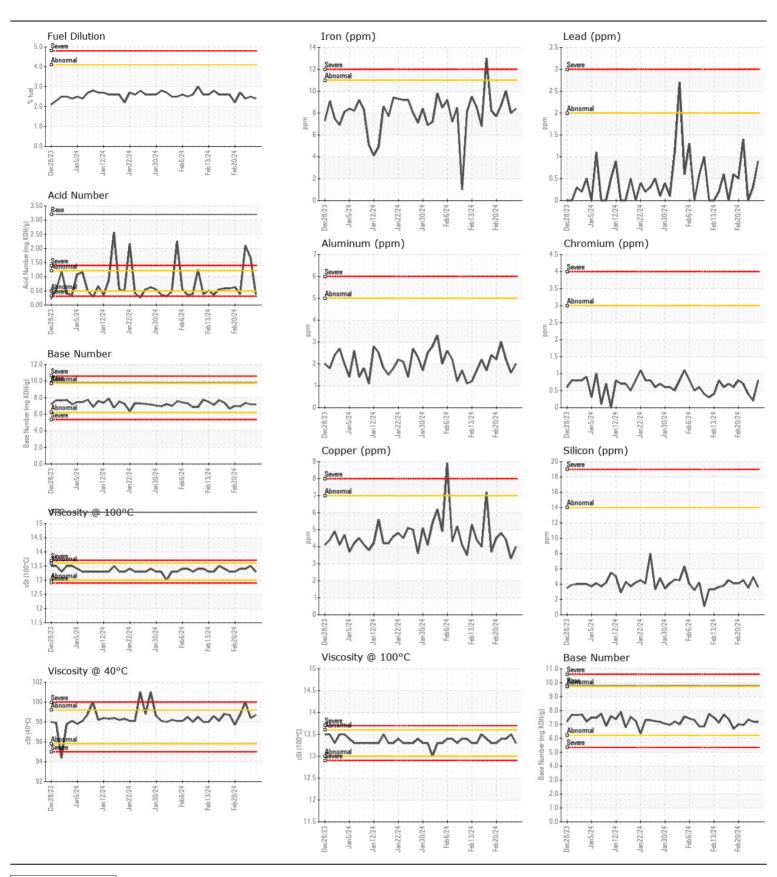



Laboratory **Lab Number** Unique Number : 10902732

: WC0906345 Sample No.

: 06104502

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : 29 Feb 2024 Received **Tested**

: 04 Mar 2024 Diagnosed

: 04 Mar 2024 - Jonathan Hester

WEARCHECK LUBRICATION SERVICES QA ACCOUNT 501 Madison Ave

Cary, NC US 27513

T: (919)379-4102 F: (919)379-4050

Test Package : MOB 2 (Additional Tests: FuelDilution, Glycol, KF, KV40, PercentFuel, VI) Contact: WCLS CARY NC Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)