



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[A34720]

Machine Id

JOHN DEERE 950K 1T0950KXJPF446417

Component

Left Outer Final Drive

Fluid

JOHN DEERE HY-GARD HYD/TRANS (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: A34720)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0006627	---	---
Sample Date		Client Info		27 Feb 2024	---	---
Machine Age	hrs	Client Info		1470	---	---
Oil Age	hrs	Client Info		1470	---	---
Filter Age	hrs	Client Info		1470	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	21	---	---
Iron	ppm	ASTM D5185m	>750	14	---	---
Chromium	ppm	ASTM D5185m	>9	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	<1	---	---
Lead	ppm	ASTM D5185m	>15	<1	---	---
Copper	ppm	ASTM D5185m	>40	0	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	10	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	---	---
Boron	ppm	ASTM D5185m	6	1	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	145	98	---	---
Calcium	ppm	ASTM D5185m	3570	3274	---	---
Phosphorus	ppm	ASTM D5185m	1290	1007	---	---
Zinc	ppm	ASTM D5185m	1640	1213	---	---
Sulfur	ppm	ASTM D5185m		3367	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	49.8	---	---

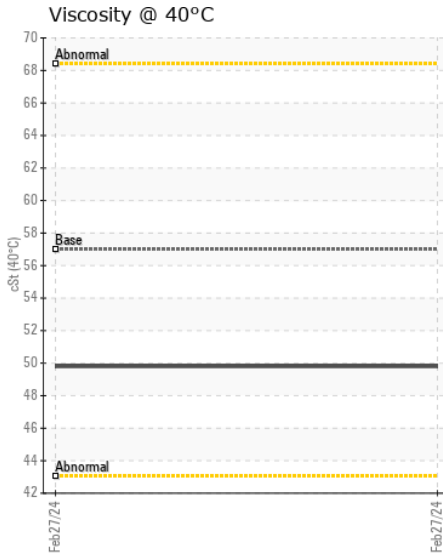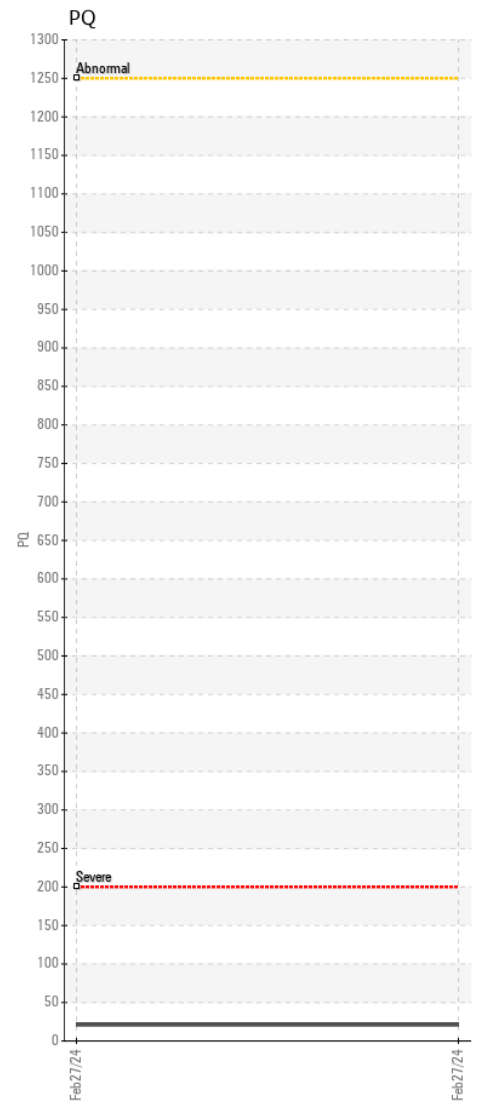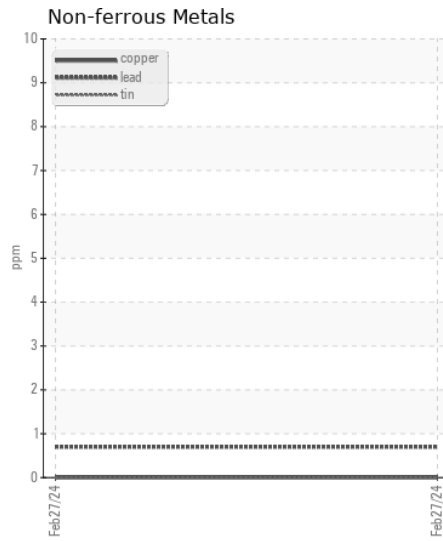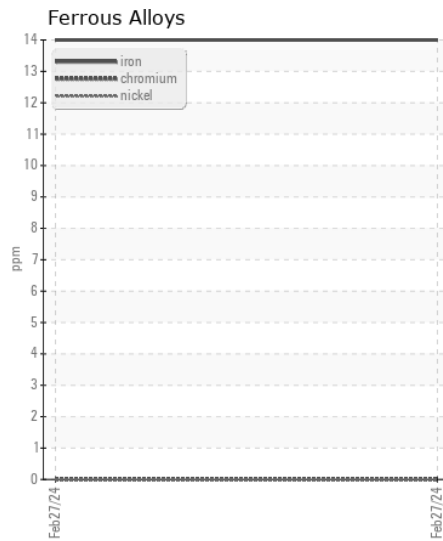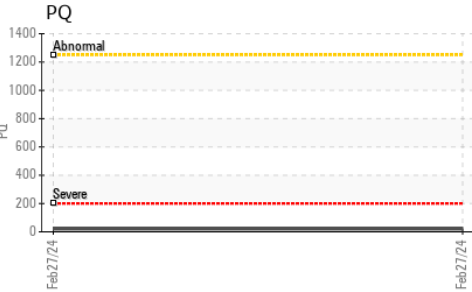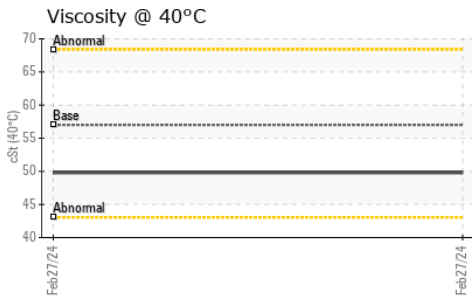

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0006627

Lab Number : 06104583

Unique Number : 10902813

Test Package : CONST (Additional Tests: PQ)

Received : 29 Feb 2024

Tested : 01 Mar 2024

Diagnosed : 04 Mar 2024 - Don Baldrige

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE

25135 ONE AVIATION WAY SW

MADISON, AL

US 35756

Contact: BOBBY LUCKY

warriorparts033@gmail.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)