



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH110 155976-1227
Component
Front Left Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0280576	LH0280565	---
Sample Date		Client Info		23 Feb 2024	30 Jan 2024	---
Machine Age	hrs	Client Info		995	534	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	None	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>650	41	32	---
Chromium	ppm	ASTM D5185m	>4	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	0	---
Titanium	ppm	ASTM D5185m	>4	<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	1	2	---
Lead	ppm	ASTM D5185m	>4	0	0	---
Copper	ppm	ASTM D5185m	>60	<1	0	---
Tin	ppm	ASTM D5185m	>4	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	16	15	---
Potassium	ppm	ASTM D5185m	>20	1	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	3	0	---
Boron	ppm	ASTM D5185m	400	3	7	---
Barium	ppm	ASTM D5185m	200	0	5	---
Molybdenum	ppm	ASTM D5185m	12	0	0	---
Manganese	ppm	ASTM D5185m		1	0	---
Magnesium	ppm	ASTM D5185m	12	2	<1	---
Calcium	ppm	ASTM D5185m	150	143	146	---
Phosphorus	ppm	ASTM D5185m	1650	1542	1311	---
Zinc	ppm	ASTM D5185m	125	25	5	---
Sulfur	ppm	ASTM D5185m	22500	19874	21091	---
Visc @ 40°C	cSt	ASTM D445	143	173	174	---

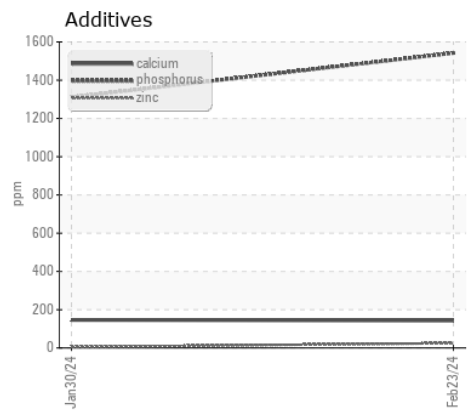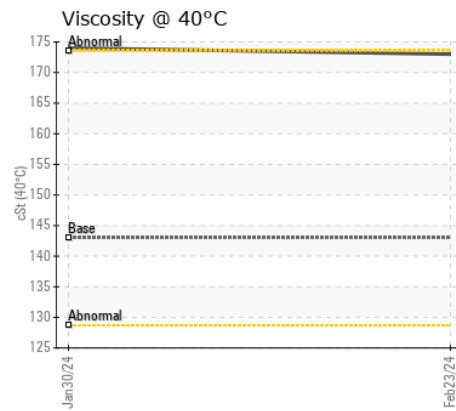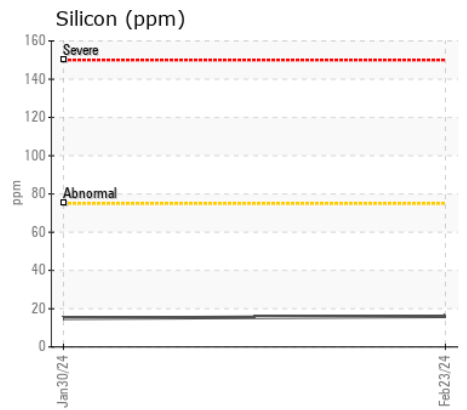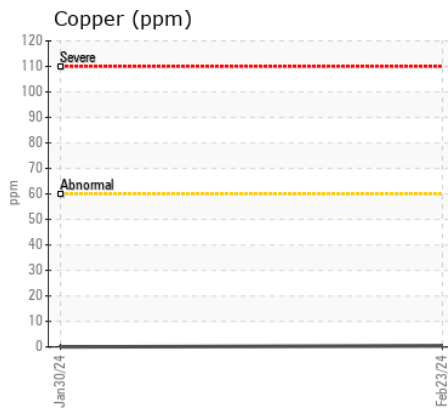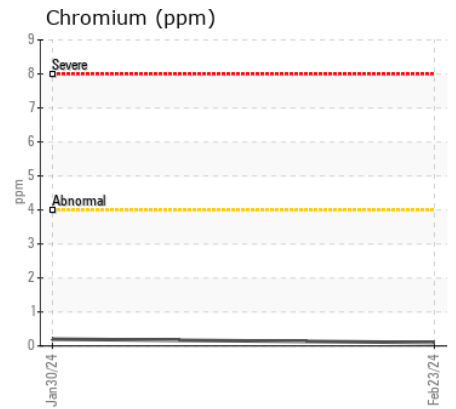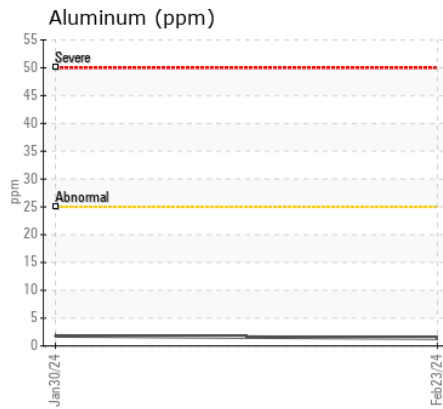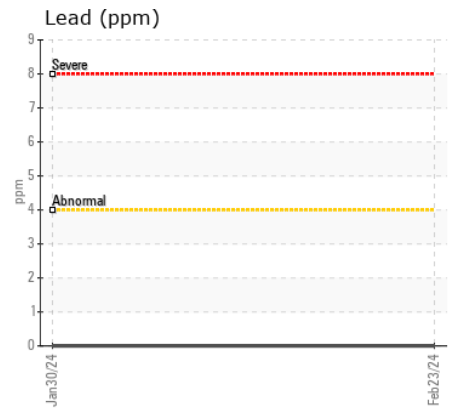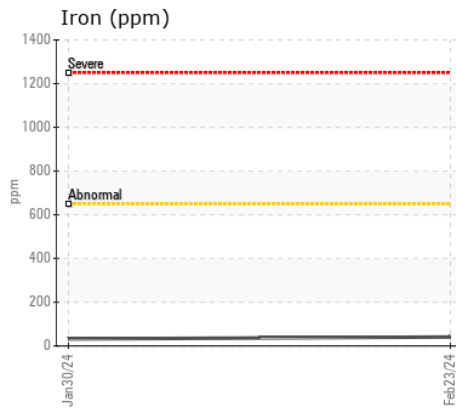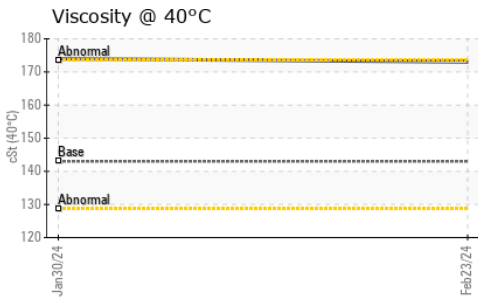

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : LH0280576

Lab Number : 06104669

Unique Number : 10902899

Test Package : MOBCE

Received : 29 Feb 2024

Tested : 01 Mar 2024

Diagnosed : 01 Mar 2024 - Wes Davis

KINDER MORGAN

4301 IVERSON

TRINITY, AL

US 35601

Contact: CHIP OAKES

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (256)350-0006

F: (256)355-5250