



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Pillen Family Farms**  
 Machine Id  
**MILTK50**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>SBP0005314</b>	SBP0006172	SBP0006198
Sample Date		Client Info		<b>21 Feb 2024</b>	12 Jan 2024	11 Jan 2024
Machine Age	hrs	Client Info		<b>350</b>	350	350
Oil Age	hrs	Client Info		<b>0</b>	350	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	<b>15</b>	7	15
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	5	8
Lead	ppm	ASTM D5185m	>40	<b>0</b>	1	2
Copper	ppm	ASTM D5185m	>330	<b>1</b>	1	4
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	5	9
Potassium	ppm	ASTM D5185m	>20	<b>10</b>	11	19
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>6	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.7</b>	6.0	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	18.6	19.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>3</b>	2	3
Boron	ppm	ASTM D5185m	0	<b>1</b>	<1	5
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	0	<b>64</b>	60	57
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m	0	<b>1038</b>	922	893
Calcium	ppm	ASTM D5185m		<b>1100</b>	1004	1030
Phosphorus	ppm	ASTM D5185m		<b>1102</b>	1024	980
Zinc	ppm	ASTM D5185m		<b>1339</b>	1175	1137
Sulfur	ppm	ASTM D5185m		<b>3419</b>	2899	2743
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	13.8	14.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>8.6</b>	8.6	8.2
Visc @ 100°C	cSt	ASTM D445	14	<b>13.6</b>	13.5	13.1

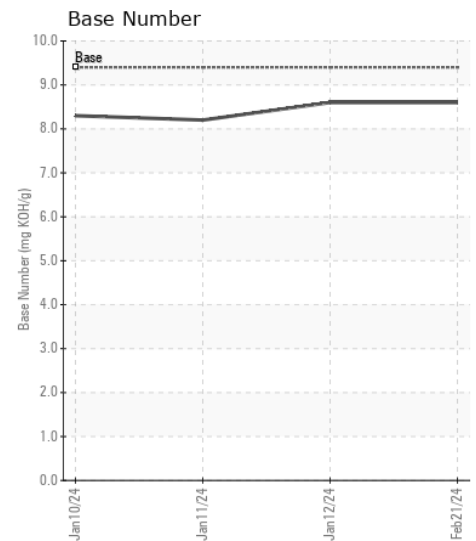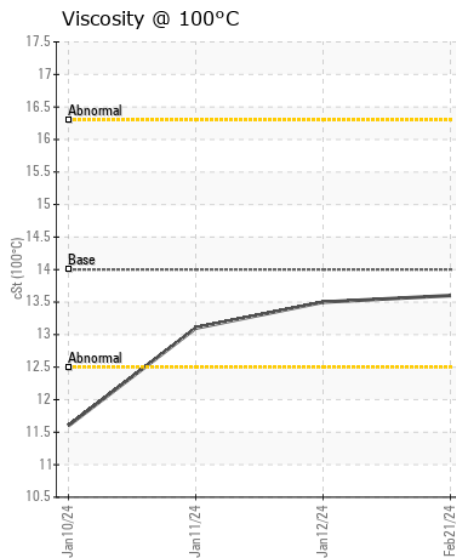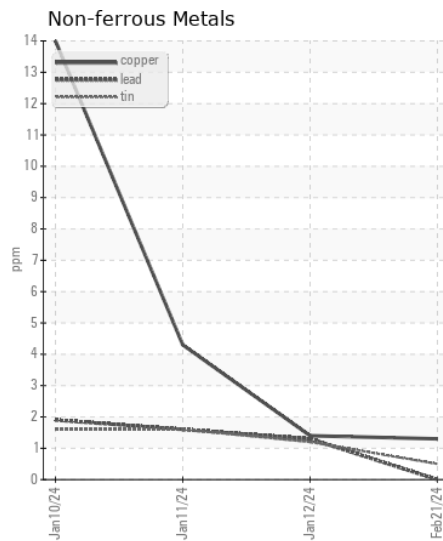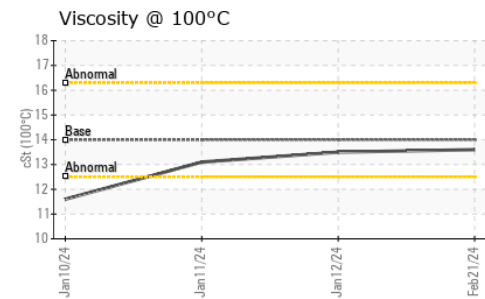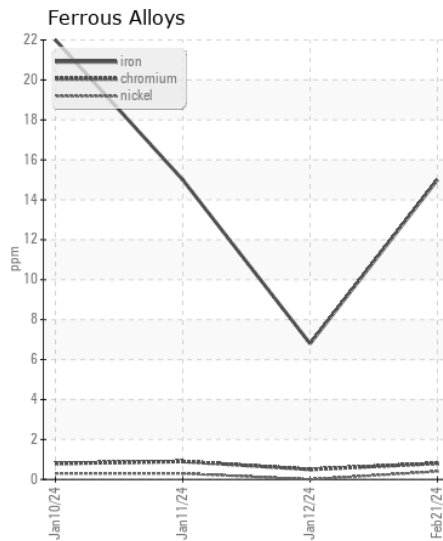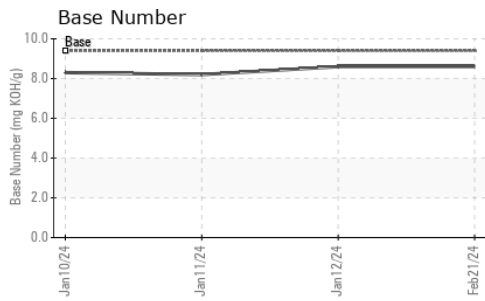

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005314 **Received** : 29 Feb 2024  
**Lab Number** : 06104875 **Tested** : 01 Mar 2024  
**Unique Number** : 10903105 **Diagnosed** : 04 Mar 2024 - Sean Felton  
**Test Package** : FLEET

**Pillen Family Farms - 722828**  
 26741 NE-91  
 Humphrey, NE  
 US 61357  
 Contact: Troy Runge  
 troyfr@pillenfamilyfarms.com  
 T: (308)390-6733  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)