



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
914030
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0109252	GFL0109273	GFL0093543
Sample Date		Client Info		28 Feb 2024	08 Feb 2024	16 Jan 2024
Machine Age	hrs	Client Info		1624	1489	1337
Oil Age	hrs	Client Info		464	329	177
Filter Age	hrs	Client Info		464	329	177
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Exhaust valve wear is indicated.

Iron	ppm	ASTM D5185m	>100	21	5	1
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	▲ 7	4	2
Titanium	ppm	ASTM D5185m		20	16	17
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	2	1	1
Lead	ppm	ASTM D5185m	>40	0	1	0
Copper	ppm	ASTM D5185m	>330	37	29	28
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	1	4
Potassium	ppm	ASTM D5185m	>20	5	4	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	7.8	7.1	6.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	19.1	18.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	3	<1
Boron	ppm	ASTM D5185m	0	14	19	20
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	54	46	46
Manganese	ppm	ASTM D5185m	0	<1	1	1
Magnesium	ppm	ASTM D5185m	1010	910	756	791
Calcium	ppm	ASTM D5185m	1070	1229	1055	1078
Phosphorus	ppm	ASTM D5185m	1150	1066	920	985
Zinc	ppm	ASTM D5185m	1270	1324	1112	1142
Sulfur	ppm	ASTM D5185m	2060	3365	2803	2943
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	14.8	14.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.3	7.9	8.6
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.8	14.0


▲ Ferrous Alloys

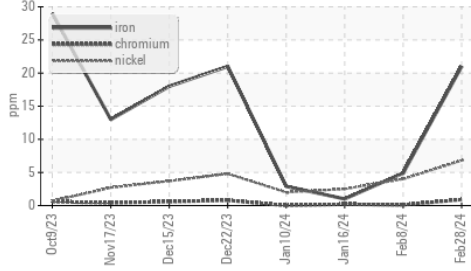


Base Number

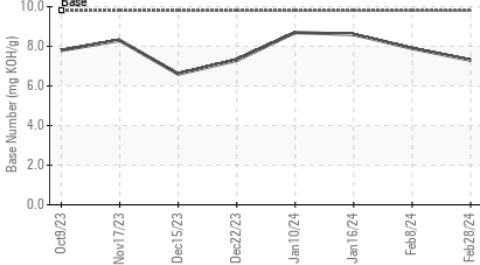


Viscosity @ 100°C

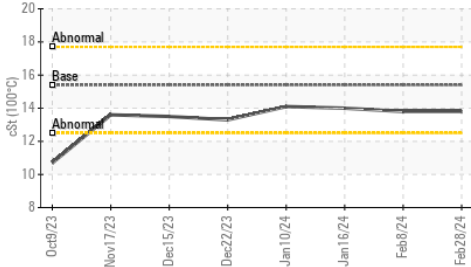


▲ Ferrous Alloys

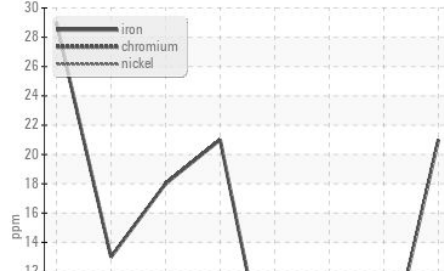


Base Number

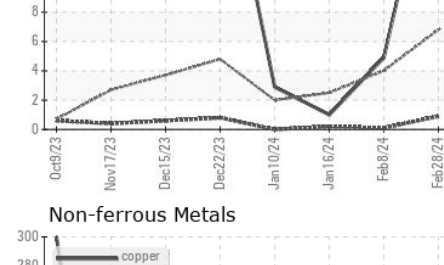


Non-ferrous Metals

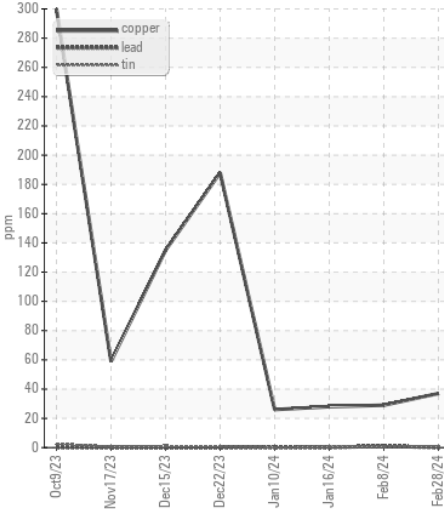

Viscosity @ 100°C

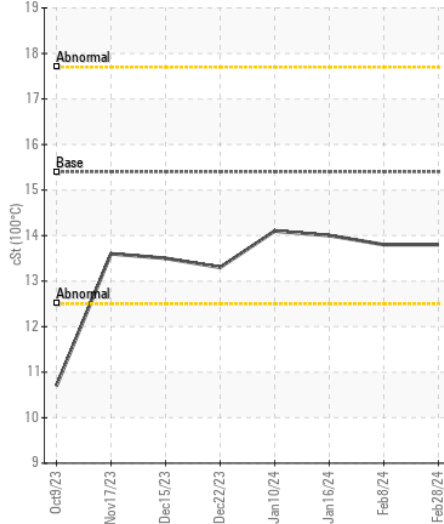

Base Number

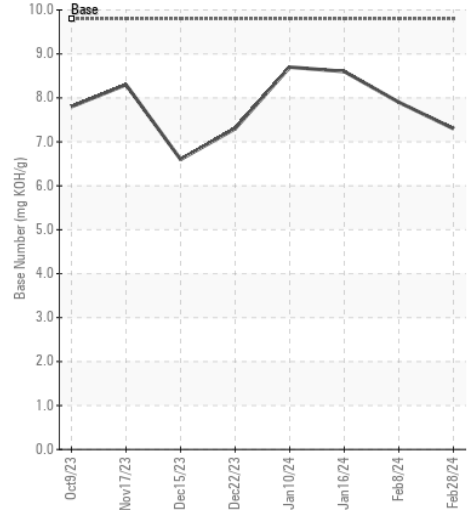

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109252
Lab Number : 06104911
Unique Number : 10903141
Test Package : FLEET

GFL Environmental - 891 - Oklahoma City Hauling
 1001 South Rockwell
 Oklahoma City, OK
 US 73128
 Contact: Andy Smith
 andrew.smith@gflenv.com
 T: (405)306-1651
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)