



PacLease

# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**857-4237**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 SAE 10W30 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0019194</b>	RPL0003554	---
Sample Date		Client Info		<b>23 Feb 2024</b>	12 Apr 2023	---
Machine Age	mls	Client Info		<b>162652</b>	0	---
Oil Age	mls	Client Info		<b>0</b>	0	---
Filter Age	mls	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>15</b>	26	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	3	---
Lead	ppm	ASTM D5185m	>40	<b>2</b>	3	---
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	3	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	7	---
Potassium	ppm	ASTM D5185m	>20	<b>10</b>	12	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	11.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.1</b>	23.3	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	0	---
Boron	ppm	ASTM D5185m		<b>42</b>	27	---
Barium	ppm	ASTM D5185m		<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m		<b>4</b>	10	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>664</b>	678	---
Calcium	ppm	ASTM D5185m		<b>1175</b>	1381	---
Phosphorus	ppm	ASTM D5185m	1260	<b>653</b>	696	---
Zinc	ppm	ASTM D5185m	1400	<b>751</b>	811	---
Sulfur	ppm	ASTM D5185m		<b>2934</b>	2985	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.3</b>	21.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	<b>5.2</b>	4.7	---
Visc @ 100°C	cSt	ASTM D445	11.1	<b>10.0</b>	11.2	---

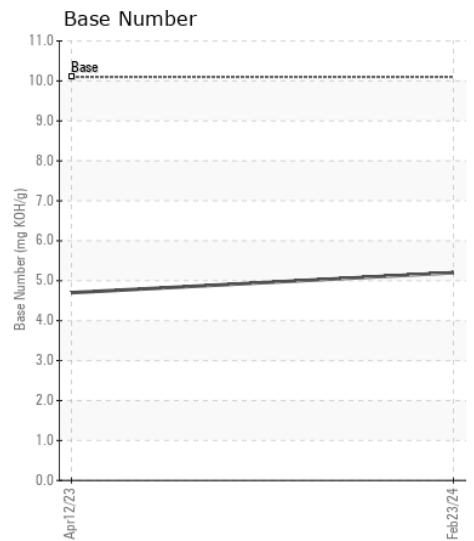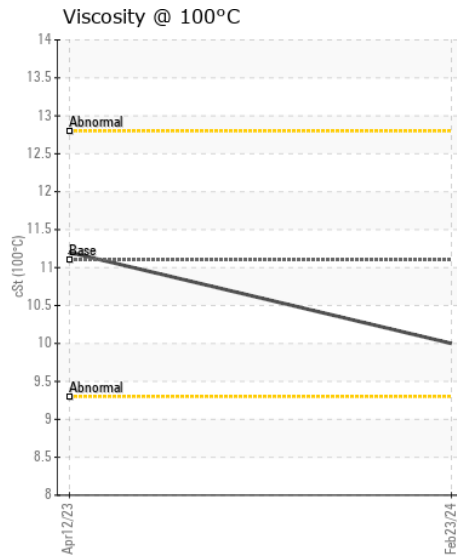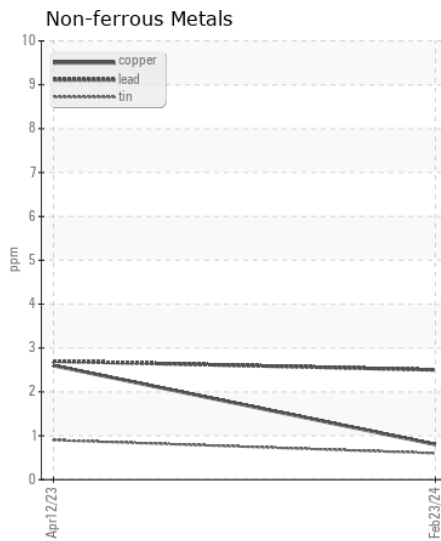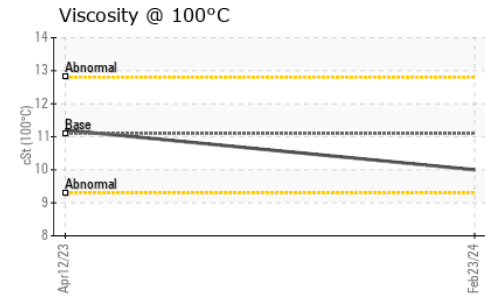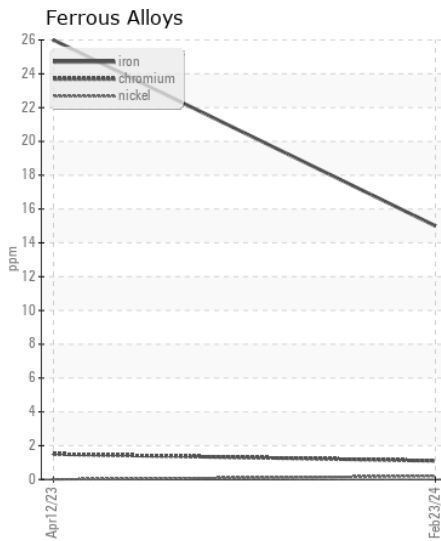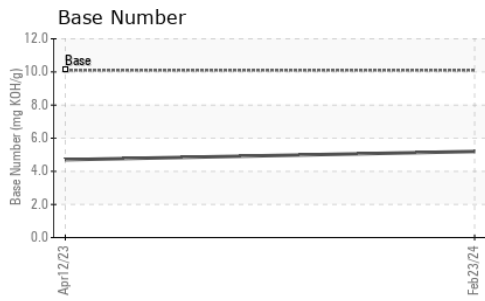

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0019194 **Received** : 29 Feb 2024  
**Lab Number** : 06104924 **Tested** : 01 Mar 2024  
**Unique Number** : 10903154 **Diagnosed** : 01 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**RTL PACLEASE - 7053 -NW Houston**  
 5808 W Sam Houston Pkwy N  
 Houston, TX  
 US 77041  
 Contact: Danial Bothmann  
 BothmannD@RushEnterprises.com  
 T: (832)942-5804  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)