



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD 600 (S/N 1FM5K8D88HGC62653)

Component
Gasoline Engine

Fluid
PETRO CANADA SUPREME 5W20 MOTOR OIL (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0117696	PCA0112916	PCA0105348
Sample Date		Client Info		21 Feb 2024	29 Dec 2023	16 Oct 2023
Machine Age	mls	Client Info		0	133605	129937
Oil Age	mls	Client Info		0	3668	5893
Filter Age	mls	Client Info		0	3668	5893
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	2	1	6
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	2	2	3
Lead	ppm	ASTM D5185m	>50	0	1	<1
Copper	ppm	ASTM D5185m	>155	2	3	4
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	21	18	▲ 38
Potassium	ppm	ASTM D5185m	>20	<1	<1	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.6	8.7	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.4	19.9	22.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	4	4	9
Boron	ppm	ASTM D5185m	183	95	82	46
Barium	ppm	ASTM D5185m	0	0	0	9
Molybdenum	ppm	ASTM D5185m	36	63	67	88
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	417	573	511	675
Calcium	ppm	ASTM D5185m	1318	1102	1129	1526
Phosphorus	ppm	ASTM D5185m	773	756	705	931
Zinc	ppm	ASTM D5185m	845	848	786	1062
Sulfur	ppm	ASTM D5185m	2690	2765	2638	3911
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.2	13.7	17.4
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	4.9	4.0	4.5
Visc @ 100°C	cSt	ASTM D445	8.42	8.7	8.2	8.6

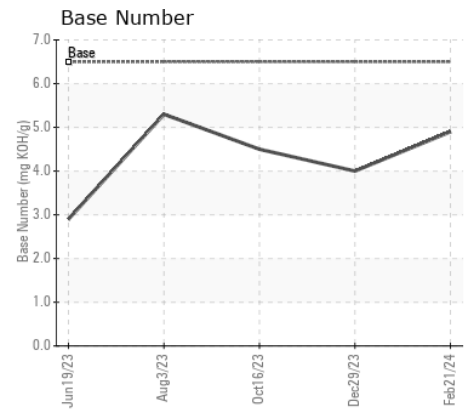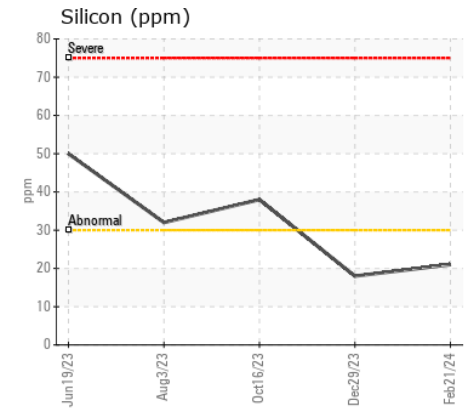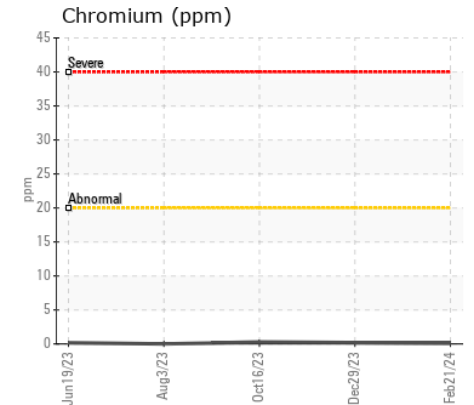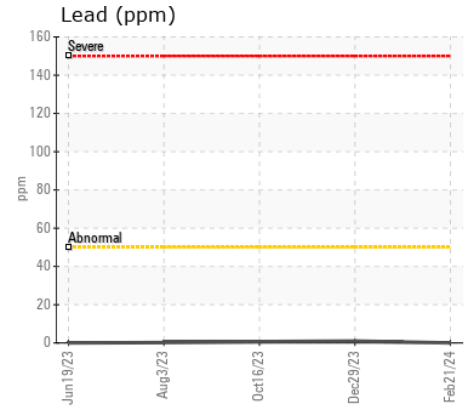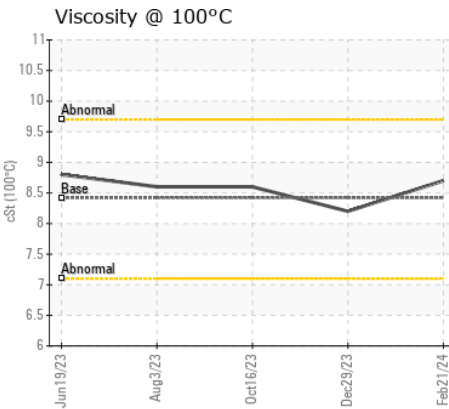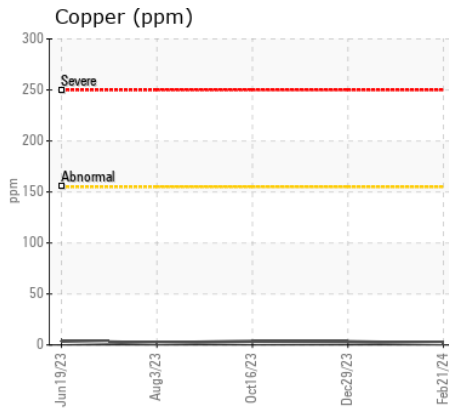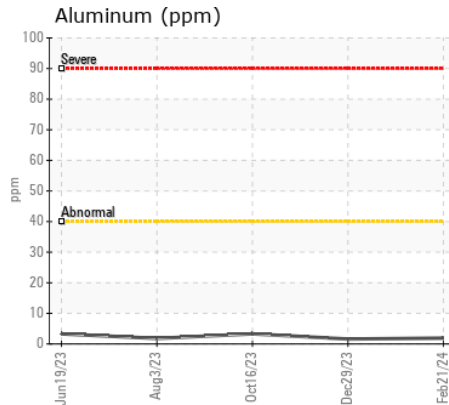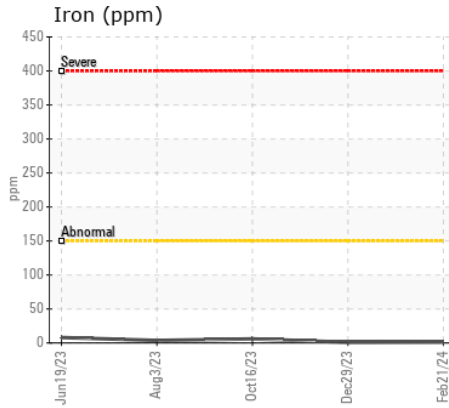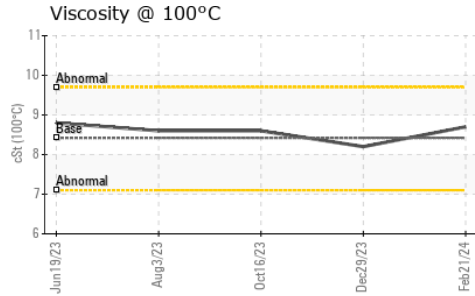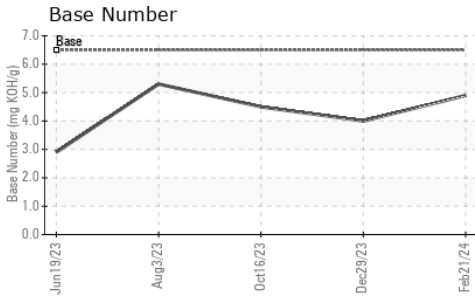

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117696 **Received** : 29 Feb 2024
Lab Number : 06105031 **Tested** : 01 Mar 2024
Unique Number : 10903261 **Diagnosed** : 01 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

VILLAGE OF NORTH RIVERSIDE
 2345 S DESPLAINES
 NORTH RIVERSIDE, IL
 US 60546
 Contact: Service Manager
 vznrdpw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: