



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH50 119411-1216
Component
Hydraulic System
Fluid
LIEBHERR HYDRAULIC HVI (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0268843	LH0264639	LH0253951
Sample Date		Client Info		28 Jan 2024	18 Jul 2023	01 Mar 2023
Machine Age	hrs	Client Info		5692	4944	4520
Oil Age	hrs	Client Info		5692	1000	4520
Filter Age	hrs	Client Info		5692	1000	4520
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	29	19	15
Chromium	ppm	ASTM D5185m	>5	2	2	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>2	<1	<1	<1
Lead	ppm	ASTM D5185m	>4	<1	<1	0
Copper	ppm	ASTM D5185m	>10	4	3	2
Tin	ppm	ASTM D5185m	>2	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>17	2	2	2
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	2454	601	3194
Particles >6µm		ASTM D7647	>5000	467	183	1012
Particles >14µm		ASTM D7647	>640	25	16	79
Particles >21µm		ASTM D7647	>160	7	4	13
Particles >38µm		ASTM D7647	>40	1	0	1
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>21/19/16	18/16/12	16/15/11	19/17/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	2	1
Boron	ppm	ASTM D5185m		<1	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	7	2	<1	7
Calcium	ppm	ASTM D5185m	1500	582	559	574
Phosphorus	ppm	ASTM D5185m	750	450	437	414
Zinc	ppm	ASTM D5185m	820	593	558	498
Sulfur	ppm	ASTM D5185m	4000	3234	3779	3096
Acid Number (AN)	mg KOH/g	ASTM D8045	1.2	0.67	0.73	0.62
Visc @ 40°C	cSt	ASTM D445	52	54.5	54.4	54.4

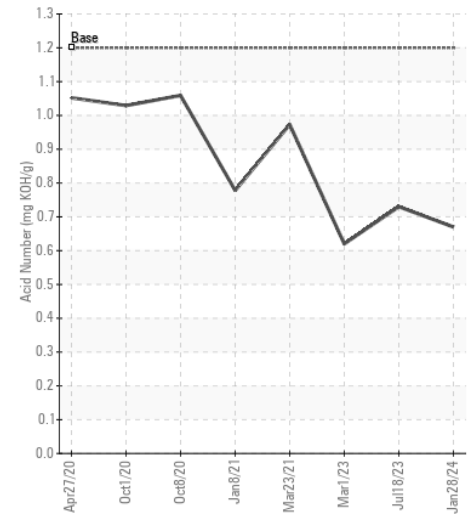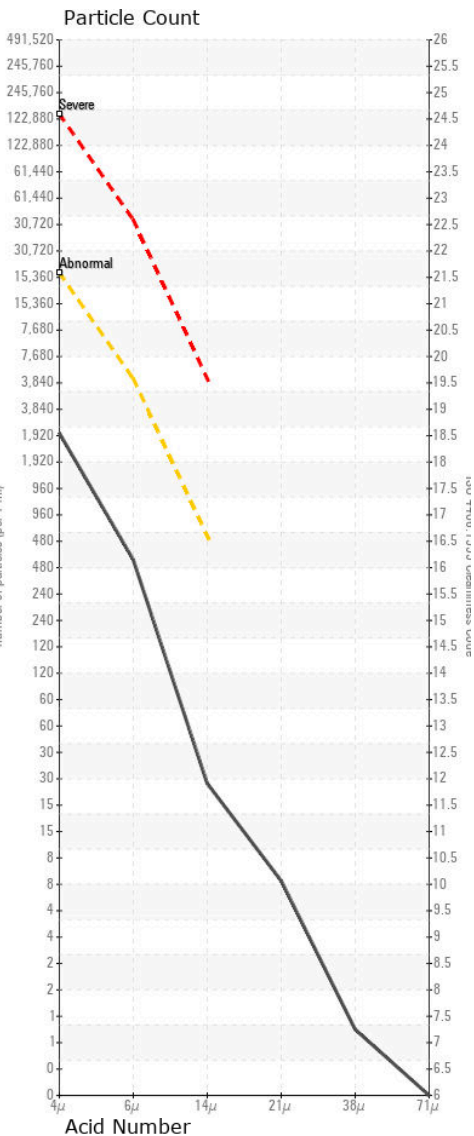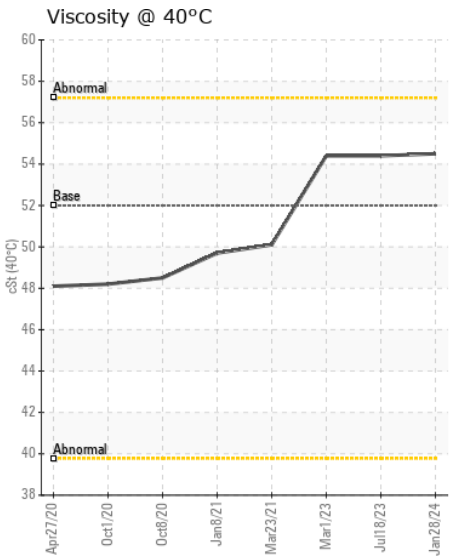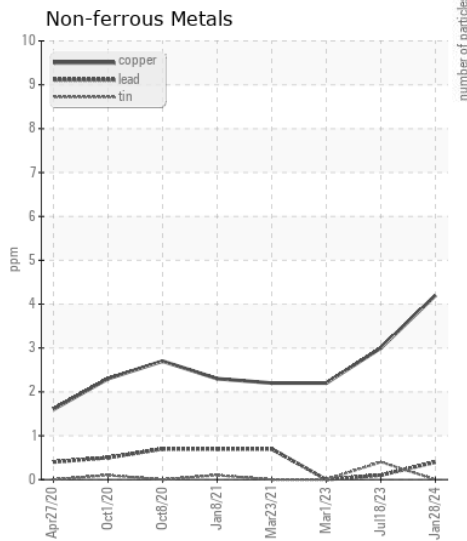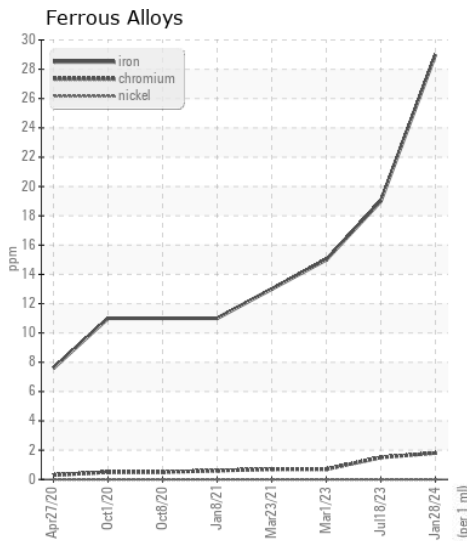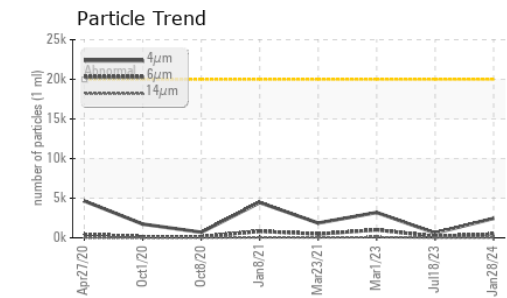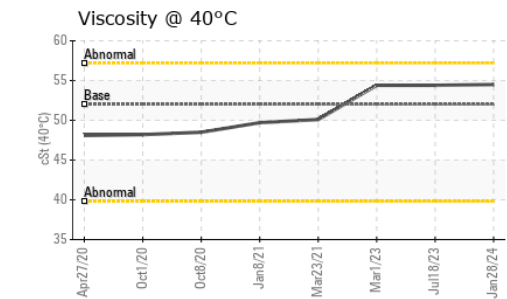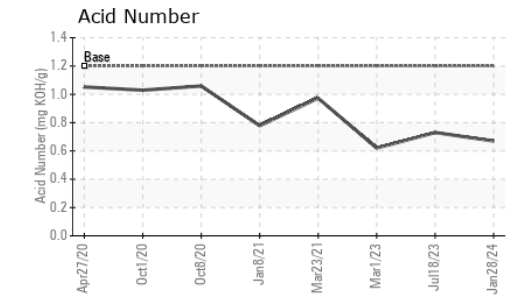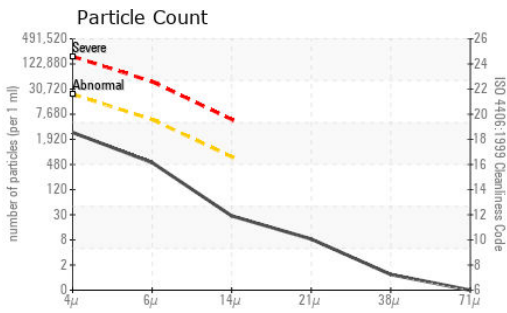

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0268843
Lab Number : 06105117
Unique Number : 10903347
Test Package : CONST

Received : 29 Feb 2024
Tested : 01 Mar 2024
Diagnosed : 01 Mar 2024 - Wes Davis

SIMS METAL MANAGEMENT
 3220 DEEPWATER TERMINAL RD
 RICHMOND, VA
 US 23234
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (703)392-0111

F: