



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
DE Samples - CAT LAB
Machine Id
KOMATSU 605 HAUL TRUCK 6555 (S/N 10571)
Component
Rear Differential
Fluid
TULCO LUBSOIL TO-4 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10001709	TO10002900	TO10002431
Sample Date		Client Info		20 Feb 2024	06 Nov 2023	07 Aug 2023
Machine Age	hrs	Client Info		30863	30346	29827
Oil Age	hrs	Client Info		4779	4262	3743
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		None	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		38	30	31
Iron	ppm	ASTM D5185m	>500	43	37	37
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	5	4	8
Lead	ppm	ASTM D5185m	>25	<1	0	<1
Copper	ppm	ASTM D5185m	>100	1	1	1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	24	21	22
Potassium	ppm	ASTM D5185m	>20	<1	2	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	3	4
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	2	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		24	22	20
Calcium	ppm	ASTM D5185m		4026	4134	4497
Phosphorus	ppm	ASTM D5185m		844	840	867
Zinc	ppm	ASTM D5185m		1009	1051	1114
Sulfur	ppm	ASTM D5185m		4770	5302	5560
Acid Number (AN)	mg KOH/g	ASTM D8045		0.94	0.78	0.98
Visc @ 40°C	cSt	ASTM D445		194	193	195
Visc @ 100°C	cSt	ASTM D445		17.0	17.1	17.1
Viscosity Index (VI)	Scale	ASTM D2270		92	94	93

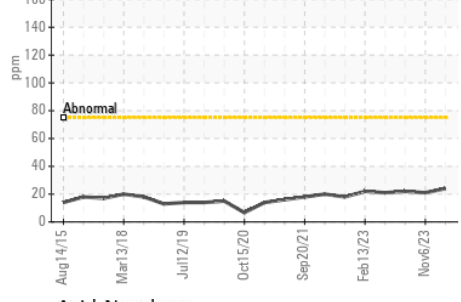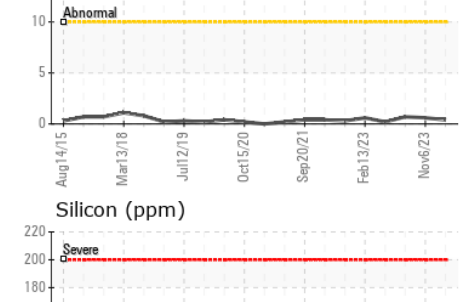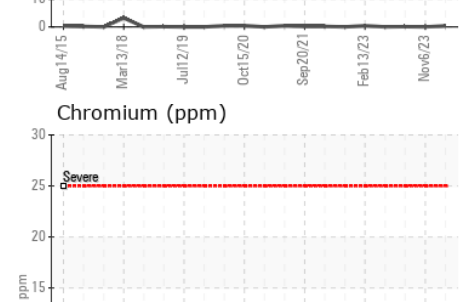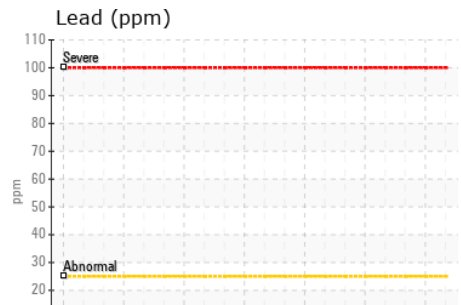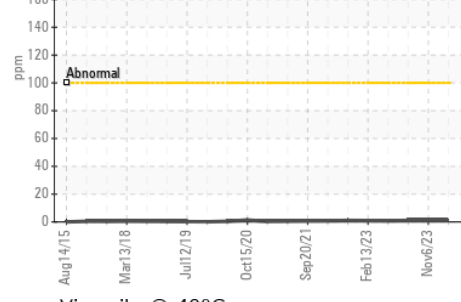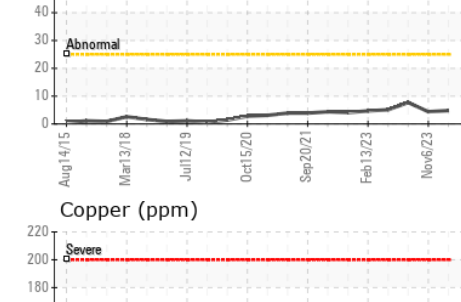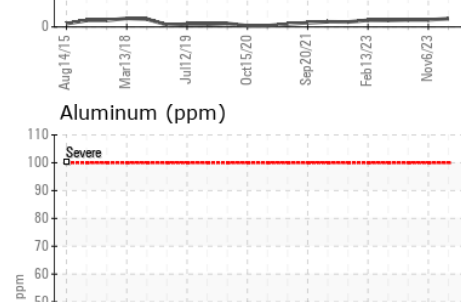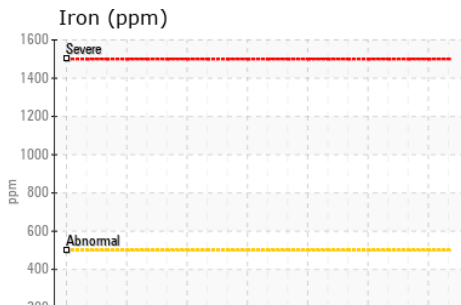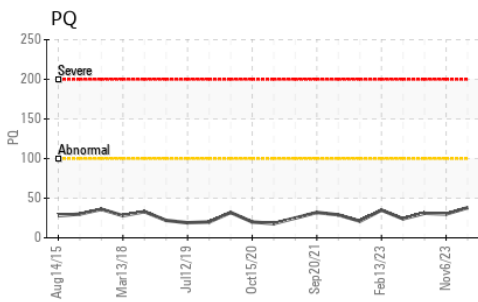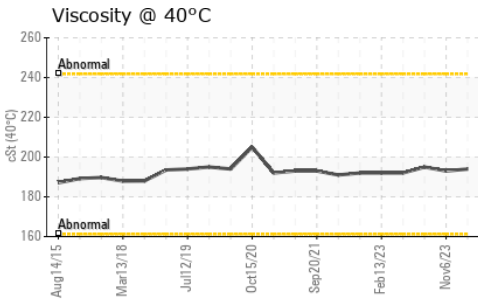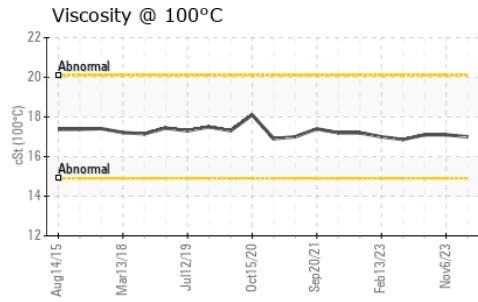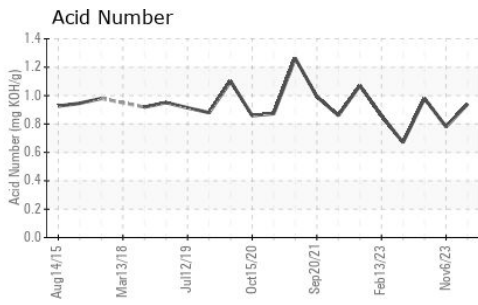

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TO10001709

Lab Number : 06105370

Unique Number : 10903600

Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

Received : 29 Feb 2024

Tested : 01 Mar 2024

Diagnosed : 01 Mar 2024 - Wes Davis

ANCHOR STONE TULSA ROCK

TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE

TULSA, OK

US 74137

Contact: MIKE SNYDER

msnyder@anchorstoneco.com

T: (417)850-9635

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)