



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**LGS00181**  
Component  
**Middle Biogas Engine**  
Fluid  
**CITGO PACEMAKER GAS ENGINE LFG LA 40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0803411</b>	WC0803403	WC0803412
Sample Date		Client Info		<b>26 Feb 2024</b>	19 Feb 2024	12 Feb 2024
Machine Age	hrs	Client Info		<b>65741</b>	65579	65414
Oil Age	hrs	Client Info		<b>95</b>	424	259
Filter Age	hrs	Client Info		<b>95</b>	916	751
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>45	<b>0</b>	9	4
Chromium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>10	<b>1</b>	<1	2
Lead	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>14	<b>&lt;1</b>	3	1
Tin	ppm	ASTM D5185m	>13	<b>2</b>	4	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>200	<b>75</b>	▲ 239	165
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624	>20	<b>3.2</b>	3.4	3.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.1</b>	17.5	16.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	1
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	2	<1
Barium	ppm	ASTM D5185m		<b>0</b>	5	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	4	2
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>14</b>	22	26
Calcium	ppm	ASTM D5185m		<b>1307</b>	1261	1336
Phosphorus	ppm	ASTM D5185m		<b>278</b>	242	303
Zinc	ppm	ASTM D5185m		<b>342</b>	328	352
Sulfur	ppm	ASTM D5185m		<b>2512</b>	3119	2956
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>6.9</b>	7.1	6.8
Acid Number (AN)	mg KOH/g	ASTM D8045	1.16	<b>0.75</b>	0.89	0.796
Base Number (BN)	mg KOH/g	ASTM D2896	5	<b>3.73</b>	3.08	3.06
Visc @ 100°C	cSt	ASTM D445	13.5	<b>12.5</b>	12.8	12.7

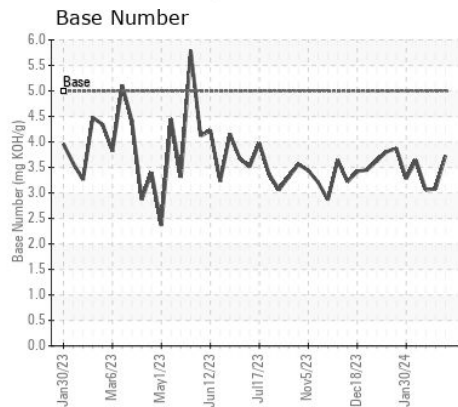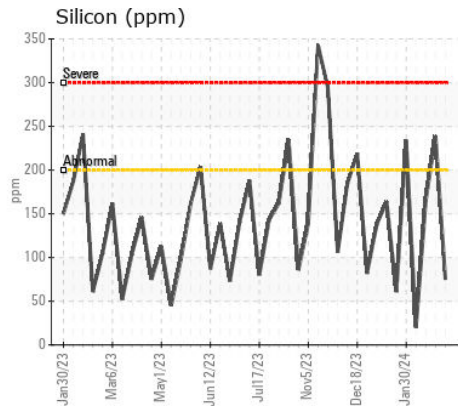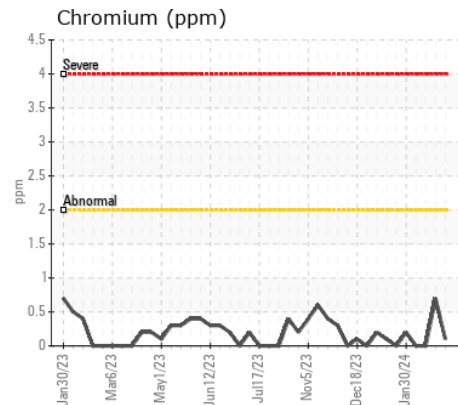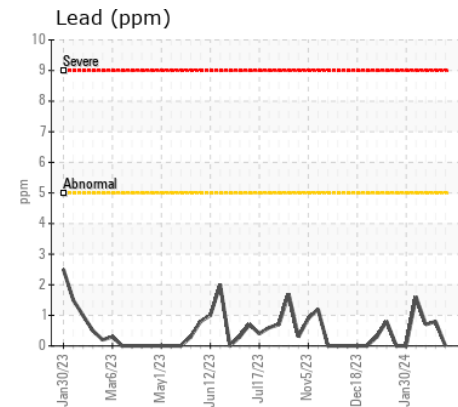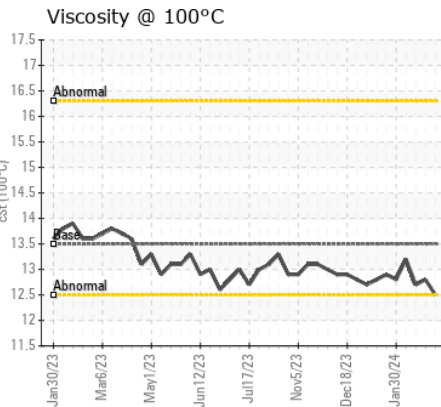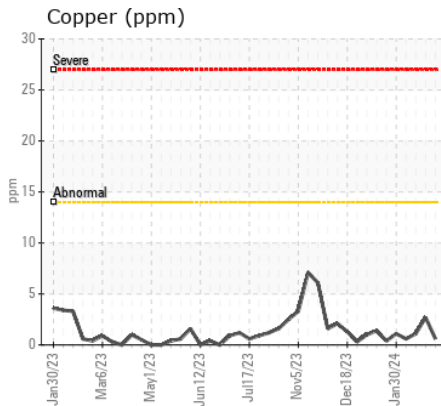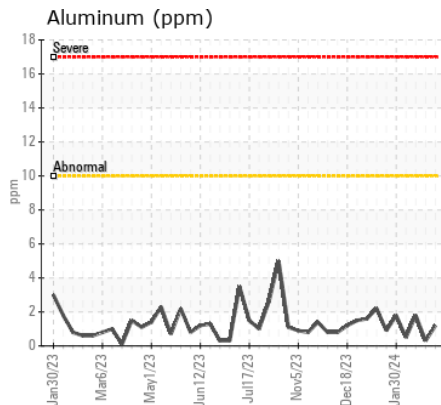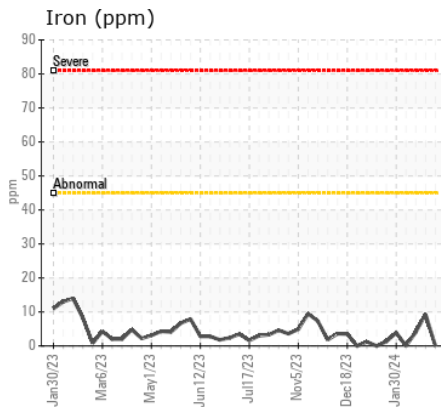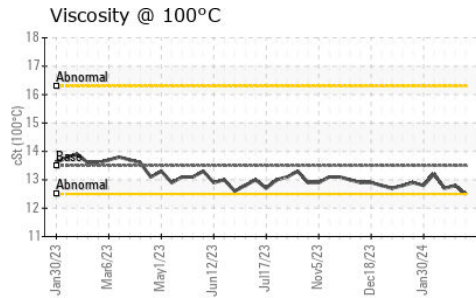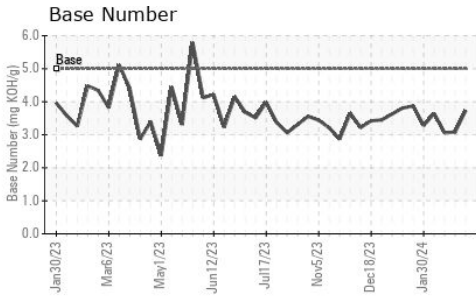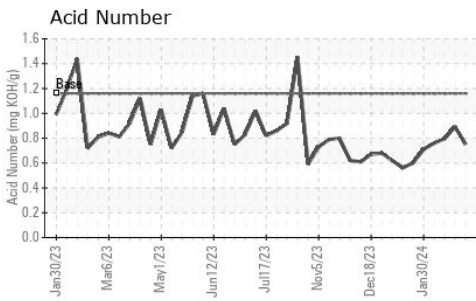

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0803411 **Received** : 29 Feb 2024  
**Lab Number** : 06105398 **Tested** : 01 Mar 2024  
**Unique Number** : 10903628 **Diagnosed** : 04 Mar 2024 - Sean Felton  
**Test Package** : MOB 2

**BLACK OAK**  
 5054 HWY HH  
 HARTVILLE, MO  
 US 65667

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: CHIP MATHEWS  
 chip.matthews@cubedistrictenergy.com  
 T:  
 F: