



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
RIG 1
Machine Id
HYUNDAI HL757-9A R1-LOADER-ENG-NKL
Component
Diesel Engine
Fluid
CHEVRON 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KL0014027	KL0014070	KL0012529
Sample Date		Client Info		16 Feb 2024	12 Dec 2023	25 Aug 2023
Machine Age	hrs	Client Info		45338	45272	45161
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	46	10	51
Chromium	ppm	ASTM D5185m	>20	<1	<1	1
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	10	3	3
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	2	1	4
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	8	7	11
Potassium	ppm	ASTM D5185m	>20	2	2	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.1	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.0	5.7	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.7	22.4	24.0
Particles >4µm		ASTM D7647		5872	15059	5855
Particles >6µm		ASTM D7647	>5000	3199	8204	3189
Particles >14µm		ASTM D7647	>640	544	1396	543
Particles >21µm		ASTM D7647	>160	183	470	183
Particles >38µm		ASTM D7647	>40	28	73	28
Particles >71µm		ASTM D7647	>10	3	7	3
Oil Cleanliness		ISO 4406 (c)	>19/16	19/16	20/18	19/16
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	6	0	6
Boron	ppm	ASTM D5185m		312	377	283
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		121	128	125
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		658	681	652
Calcium	ppm	ASTM D5185m		1433	1547	1604
Phosphorus	ppm	ASTM D5185m		729	711	694
Zinc	ppm	ASTM D5185m		844	853	837
Sulfur	ppm	ASTM D5185m		2920	2715	3212
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	15.9	17.8
Base Number (BN)	mg KOH/g	ASTM D2896		10.07	11.35	8.94
Visc @ 100°C	cSt	ASTM D445	14.4	12.7	12.6	13.6

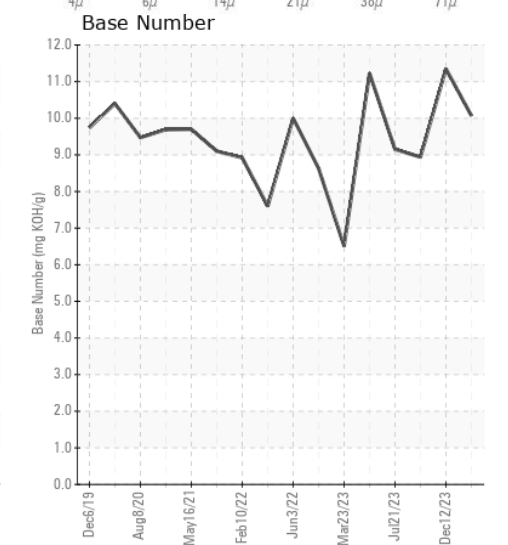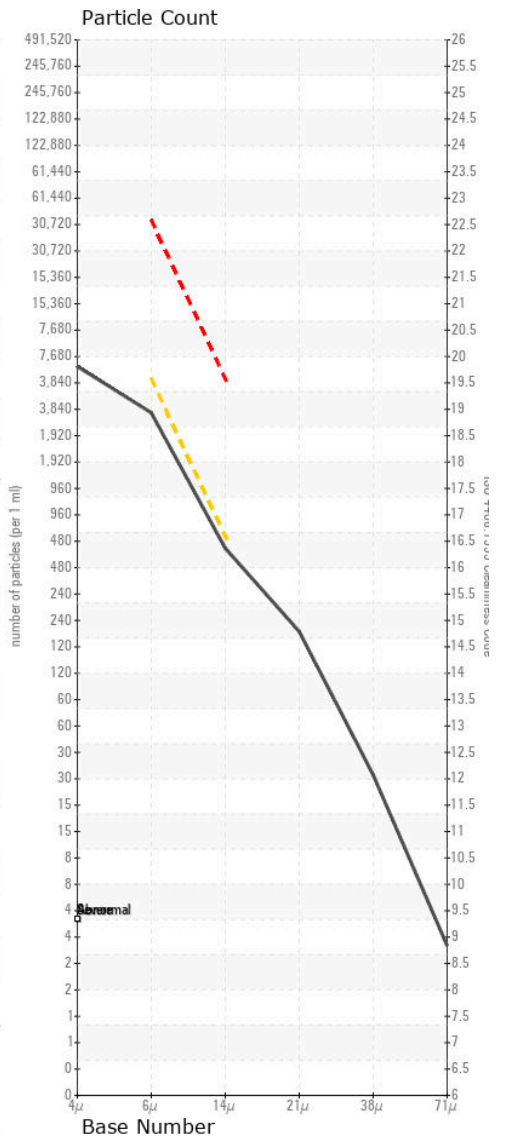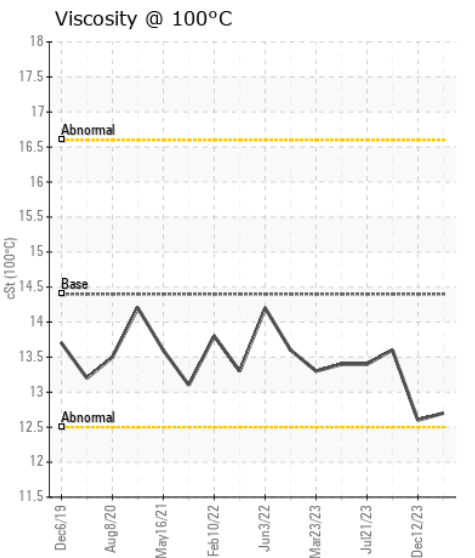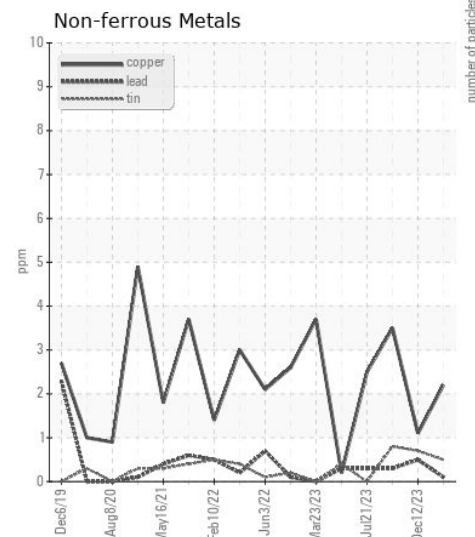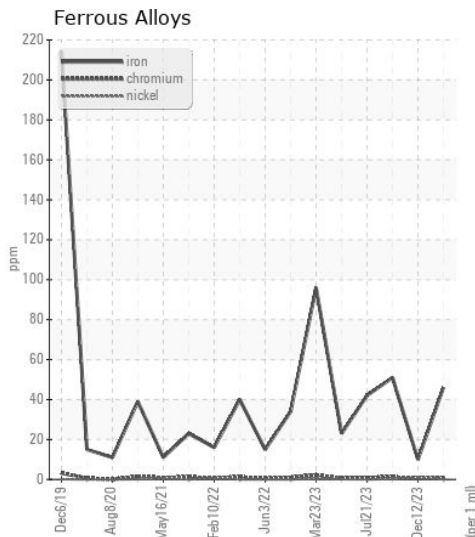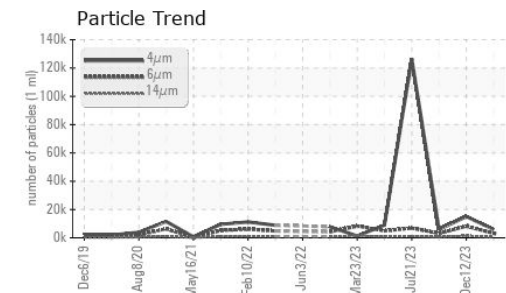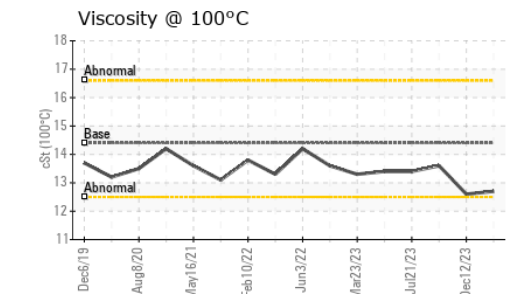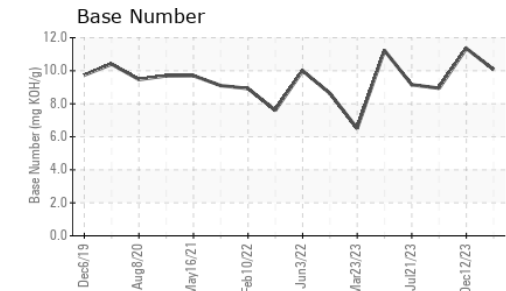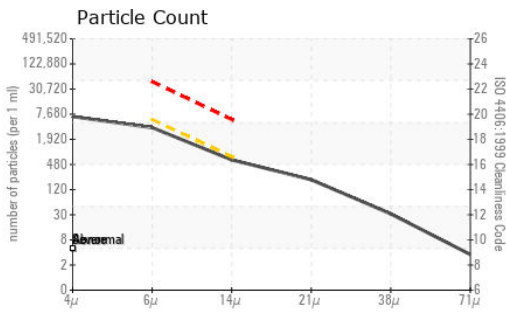

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0014027 **Received** : 29 Feb 2024
Lab Number : 06105407 **Tested** : 06 Mar 2024
Unique Number : 10903637 **Diagnosed** : 06 Mar 2024 - Jonathan Hester
Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CITADEL DRILLING
 7550 W 120
 ODESSA, TX
 US 79763

Contact: MIKE COMBDEN
 mcombden@citadelldrilling.com

T: (780)955-5509

F: