



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 260E 1DW260ETCJF687452

Component
Rear Differential

Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- LTR)

RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199910	JR0106544	JR0049156
Sample Date		Client Info		28 Feb 2024	16 Mar 2022	19 May 2020
Machine Age	hrs	Client Info		5931	3955	1969
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

Bearing and/or gear wear is indicated.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		273	127	440
Iron	ppm	ASTM D5185m	>500	▲ 726	▲ 740	▲ 889
Chromium	ppm	ASTM D5185m	>10	2	2	3
Nickel	ppm	ASTM D5185m	>10	1	1	3
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	2
Lead	ppm	ASTM D5185m	>25	<1	<1	<1
Copper	ppm	ASTM D5185m	>100	▲ 225	▲ 237	▲ 173
Tin	ppm	ASTM D5185m	>10	8	9	4
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>75	9	9	12
Potassium	ppm	ASTM D5185m	>20	0	0	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		2	3	8
Boron	ppm	ASTM D5185m	6	1	10	21
Barium	ppm	ASTM D5185m	0	0	0	3
Molybdenum	ppm	ASTM D5185m	0	<1	2	2
Manganese	ppm	ASTM D5185m		7	10	23
Magnesium	ppm	ASTM D5185m	145	101	106	92
Calcium	ppm	ASTM D5185m	3570	3149	3615	3736
Phosphorus	ppm	ASTM D5185m	1290	988	1051	1096
Zinc	ppm	ASTM D5185m	1640	1228	1223	1275
Sulfur	ppm	ASTM D5185m		3331	3286	3236
Visc @ 40°C	cSt	ASTM D445	57.0	52.8	53.6	53.9

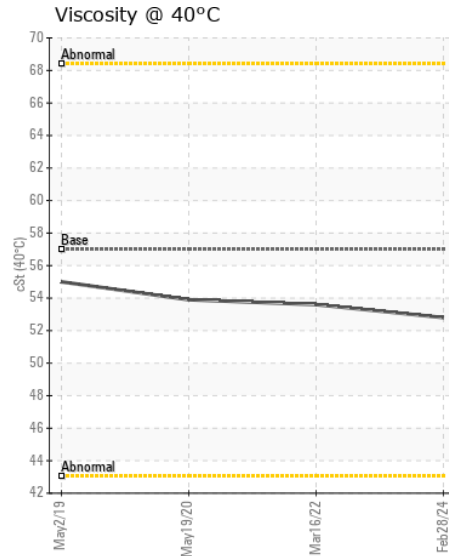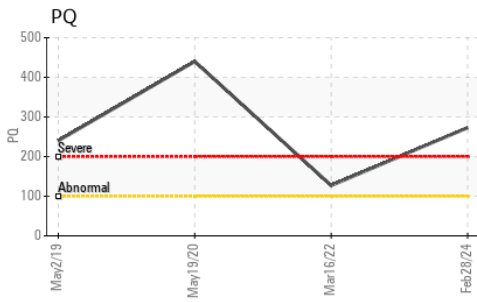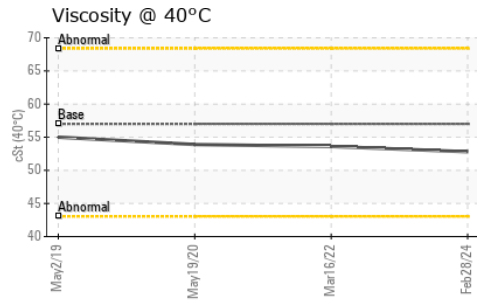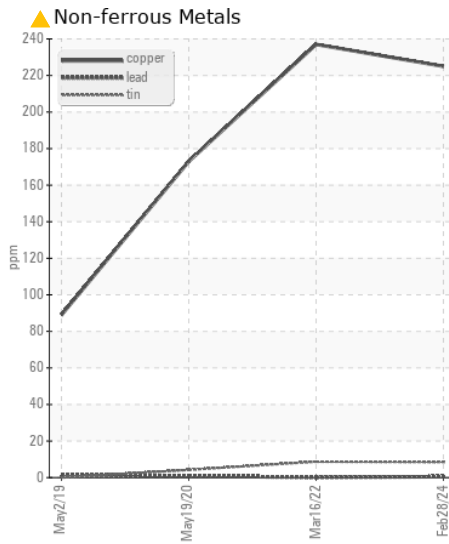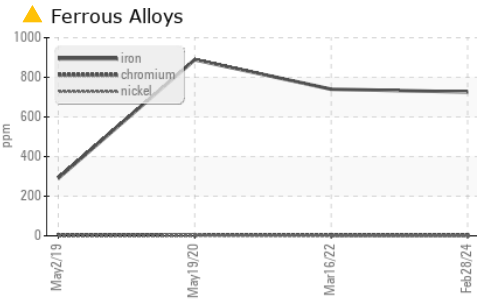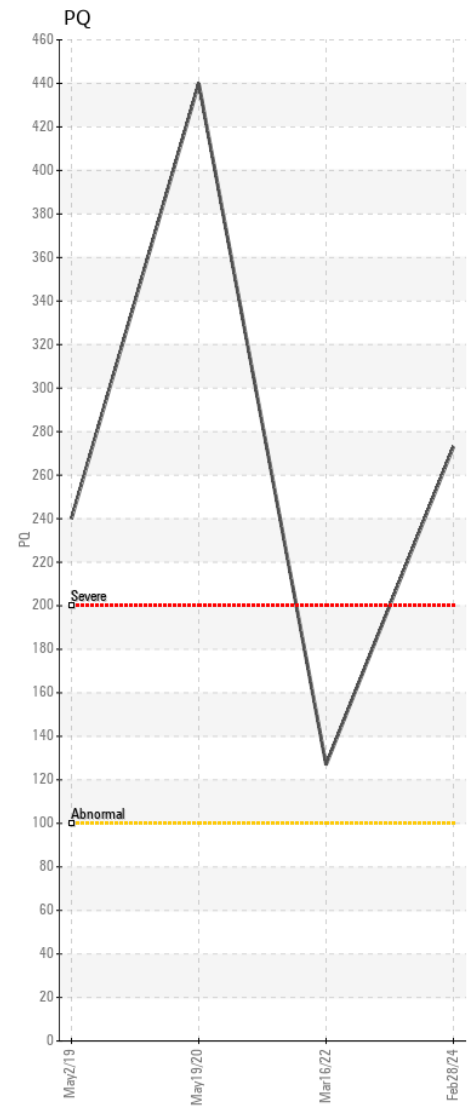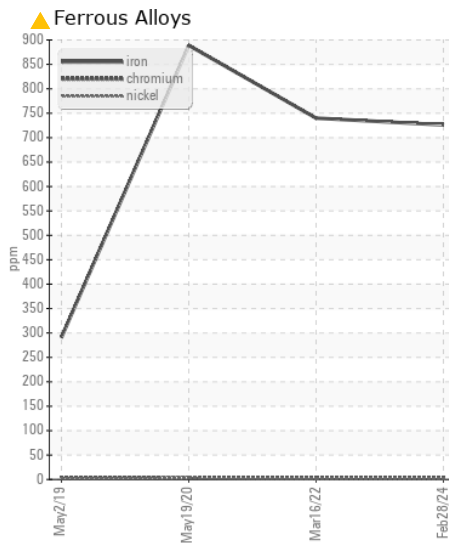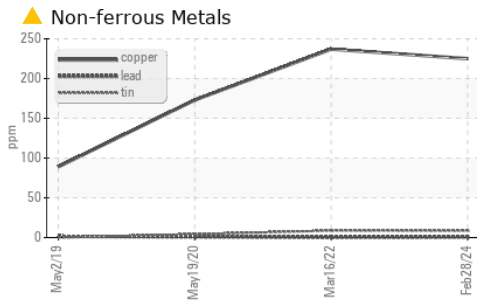

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199910 **Received** : 29 Feb 2024
Lab Number : 06105468 **Tested** : 02 Mar 2024
Unique Number : 10903698 **Diagnosed** : 04 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)