



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[61239]**  
Machine Id  
**VOLVO A25G 740358**  
Component  
**Drop Box**  
Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP454343</b>	VCP421097	VCP355071
Sample Date		Client Info		<b>23 Feb 2024</b>	31 Mar 2023	10 Jun 2022
Machine Age	hrs	Client Info		<b>10241</b>	9085	8321
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>12</b>	13	14
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>3</b>	3	2
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Boron	ppm	ASTM D5185m	111	<b>161</b>	189	204
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	<1	2
Molybdenum	ppm	ASTM D5185m	0.9	<b>2</b>	3	3
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	39	<b>14</b>	17	12
Calcium	ppm	ASTM D5185m	93	<b>52</b>	45	38
Phosphorus	ppm	ASTM D5185m	920	<b>962</b>	980	877
Zinc	ppm	ASTM D5185m	104	<b>37</b>	39	32
Sulfur	ppm	ASTM D5185m	20179	<b>26358</b>	30653	22984
Visc @ 40°C	cSt	ASTM D445	333	<b>310</b>	305	308

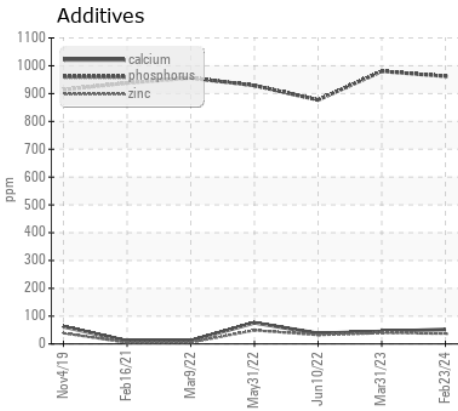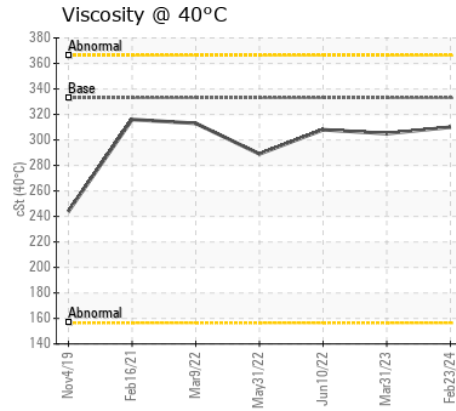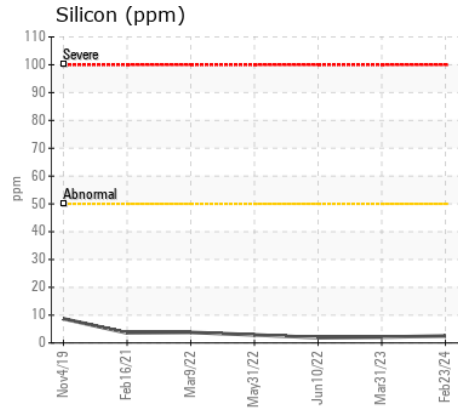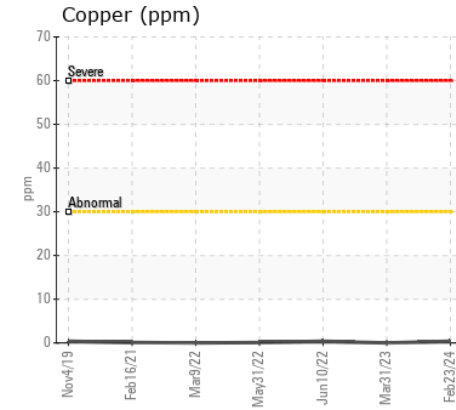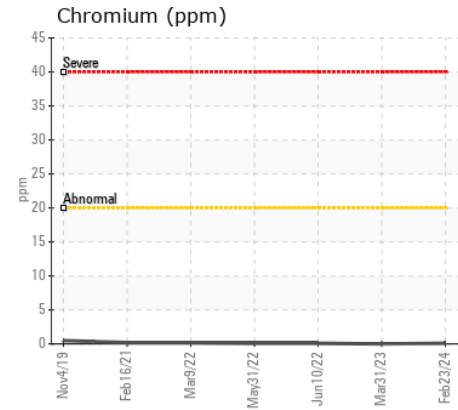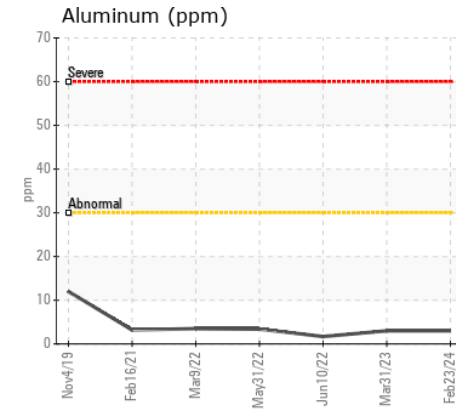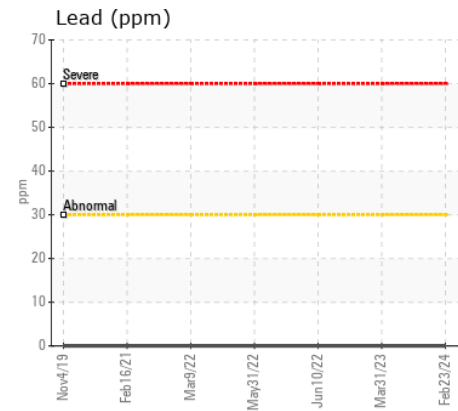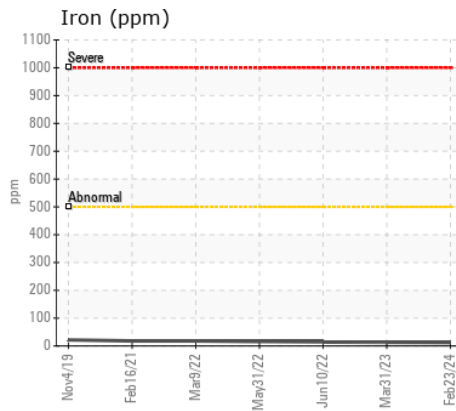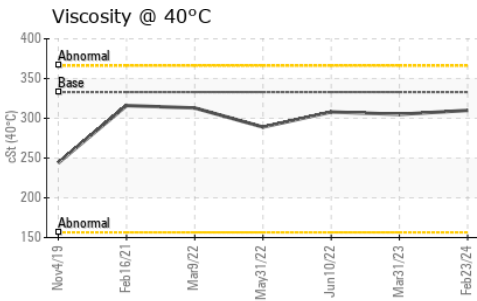

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP454343  
**Lab Number** : 06105491  
**Unique Number** : 10903721  
**Test Package** : MOB 1  
**Received** : 29 Feb 2024  
**Tested** : 01 Mar 2024  
**Diagnosed** : 01 Mar 2024 - Wes Davis

**WLW CONSTRUCTION**  
 PO BOX 377  
 MT DORA, FL  
 US 32756-0377  
 Contact: ELAINE STULTZ  
 elaine@wlwconstruction.com  
 T: (352)383-7305  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)