



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
016-0114
Component
Rear Right Final Drive
Fluid
SCHAEFFER SCHAEFFER 293 MOLY 75W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0904076	WC0815121	WC0815153
Sample Date		Client Info		14 Feb 2024	06 Sep 2023	04 Apr 2023
Machine Age	hrs	Client Info		12374	11388	10376
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

Bearing and/or bushing wear is indicated. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	252	238	227
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	0
Lead	ppm	ASTM D5185m	>25	1	0	0
Copper	ppm	ASTM D5185m	>50	▲ 183	▲ 163	▲ 154
Tin	ppm	ASTM D5185m	>10	▲ 12	▲ 11	8
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	8	8	8
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	3	<1
Boron	ppm	ASTM D5185m		131	153	147
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		3	3	2
Magnesium	ppm	ASTM D5185m		1	2	0
Calcium	ppm	ASTM D5185m		124	145	124
Phosphorus	ppm	ASTM D5185m		1115	1105	1099
Zinc	ppm	ASTM D5185m		93	120	94
Sulfur	ppm	ASTM D5185m		21292	24153	24870
Visc @ 40°C	cSt	ASTM D445		126	126	126

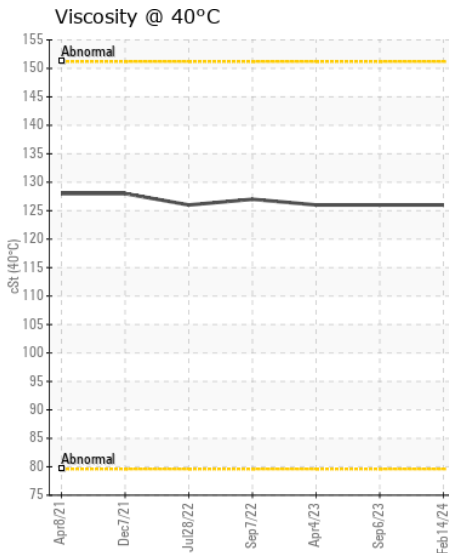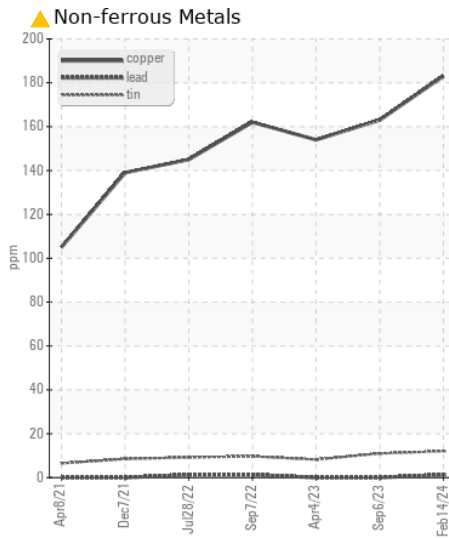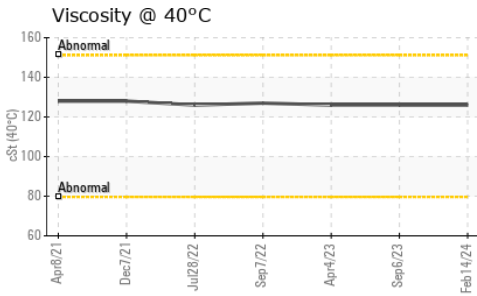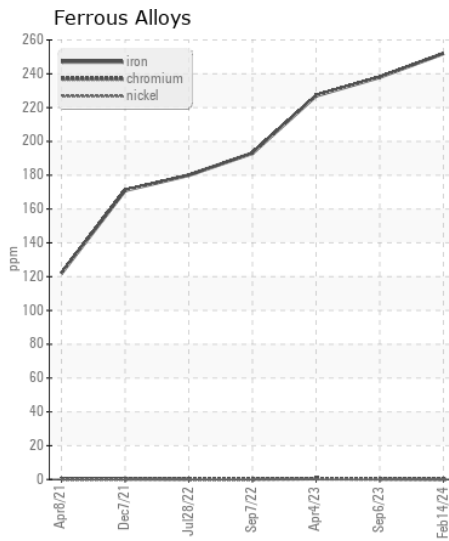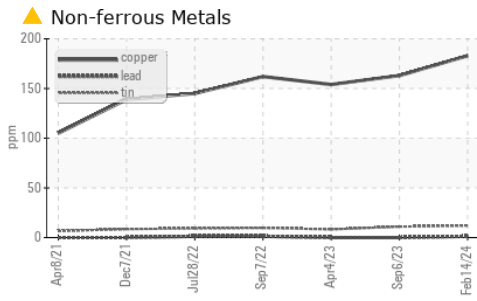

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0904076
Lab Number : 06105540
Unique Number : 10903770
Test Package : CONST
Received : 29 Feb 2024
Tested : 02 Mar 2024
Diagnosed : 04 Mar 2024 - Don Baldrige

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: