



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**729097**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

**WEAR**

All component wear rates are normal.





**CONTAMINATION**

There is no indication of any contamination in the fluid.

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0097805</b>	GFL0085324	---
Sample Date		Client Info		<b>26 Feb 2024</b>	15 Jun 2023	---
Machine Age	hrs	Client Info		<b>11297</b>	11297	---
Oil Age	hrs	Client Info		<b>1300</b>	0	---
Filter Age	hrs	Client Info		<b>1300</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>160	<b>114</b>	59	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>50	<b>5</b>	4	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>225	<b>5</b>	4	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>20	<b>9</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>2</b>	3	---
Boron	ppm	ASTM D5185m		<b>67</b>	81	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	---
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	0	---
Calcium	ppm	ASTM D5185m		<b>128</b>	112	---
Phosphorus	ppm	ASTM D5185m		<b>206</b>	233	---
Zinc	ppm	ASTM D5185m		<b>0</b>	0	---
Sulfur	ppm	ASTM D5185m		<b>1689</b>	1999	---
Visc @ 40°C	cSt	ASTM D445	35.0	<b>33.3</b>	33.7	---

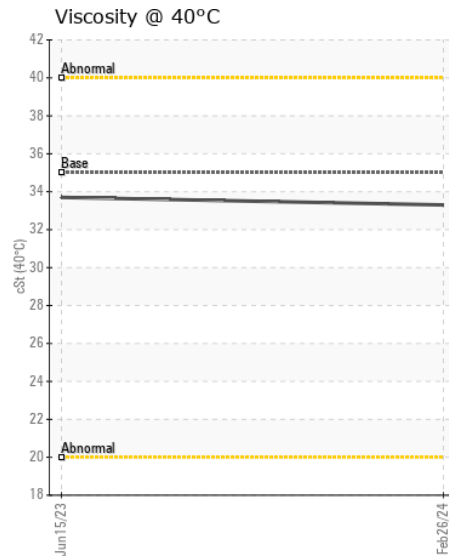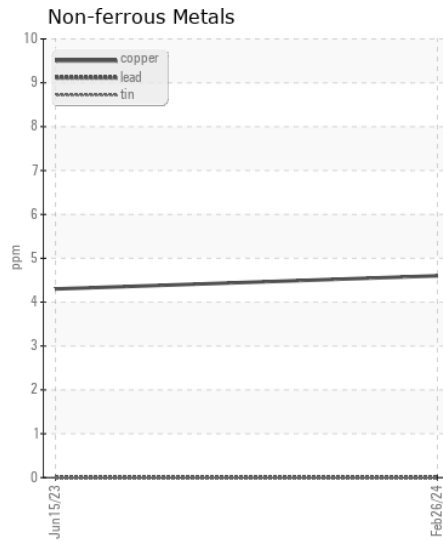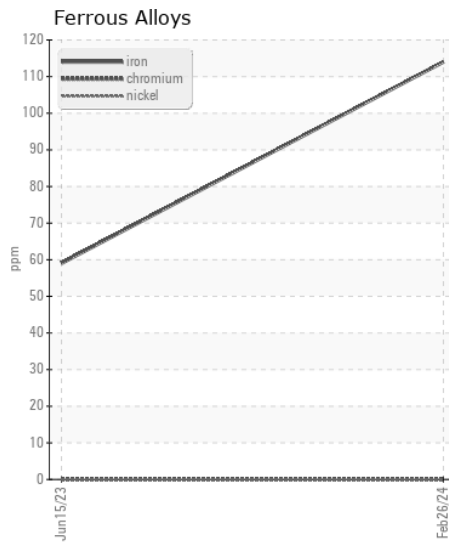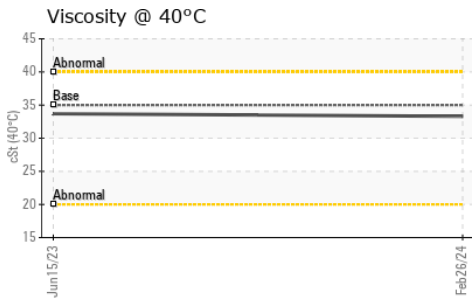

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0097805  
**Lab Number** : 06105661  
**Unique Number** : 10903891  
**Test Package** : FLEET

**Received** : 29 Feb 2024  
**Tested** : 02 Mar 2024  
**Diagnosed** : 02 Mar 2024 - Wes Davis

**GFL Environmental - 958 - Tri County HC Morton**  
 1090 W. Jefferson St.  
 Morton, IL  
 US 61550  
 Contact: Bryan Link  
 blink@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: