



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[X47196]
Machine Id
VOLVO L90H 627143

Component
Diesel Engine

Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP425197	---	---
Sample Date		Client Info		27 Feb 2024	---	---
Machine Age	hrs	Client Info		610	---	---
Oil Age	hrs	Client Info		610	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>100	41	---	---
Chromium	ppm	ASTM D5185m	>10	4	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	24	---	---
Lead	ppm	ASTM D5185m	>20	<1	---	---
Copper	ppm	ASTM D5185m	>15	8	---	---
Tin	ppm	ASTM D5185m	>10	4	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	17	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	2.5	36	---	---
Barium	ppm	ASTM D5185m	0.0	2	---	---
Molybdenum	ppm	ASTM D5185m	0.7	42	---	---
Manganese	ppm	ASTM D5185m	0.0	5	---	---
Magnesium	ppm	ASTM D5185m	256	608	---	---
Calcium	ppm	ASTM D5185m	2057	1541	---	---
Phosphorus	ppm	ASTM D5185m	935	1009	---	---
Zinc	ppm	ASTM D5185m	1223	1188	---	---
Sulfur	ppm	ASTM D5185m	4079	3381	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.5	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	12.7	---	---

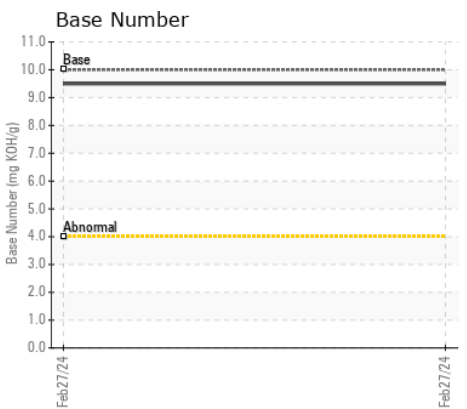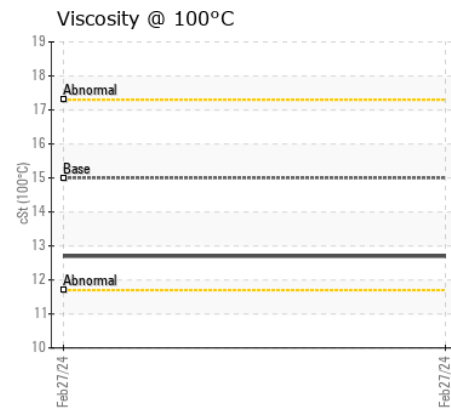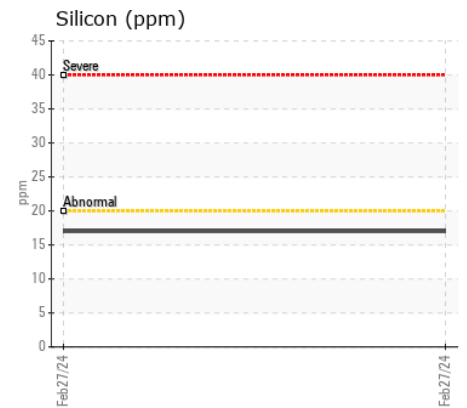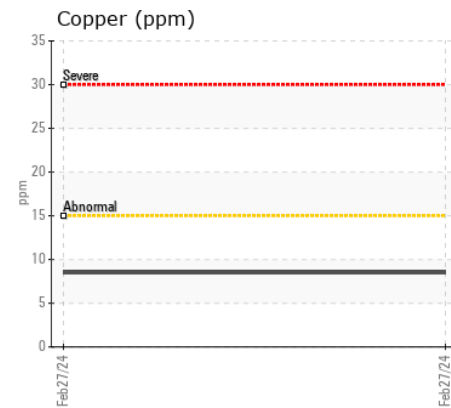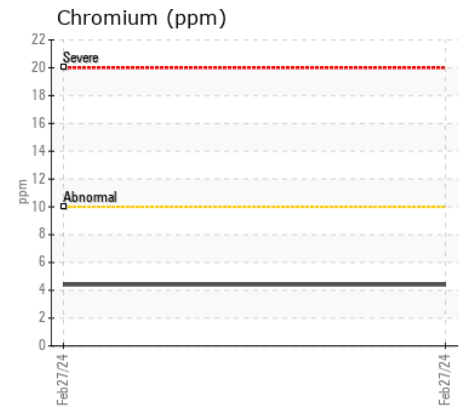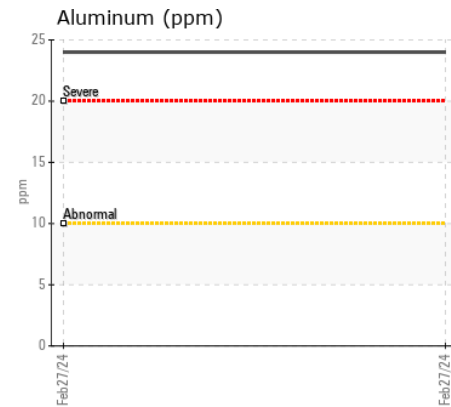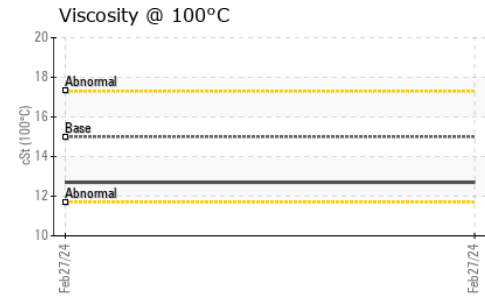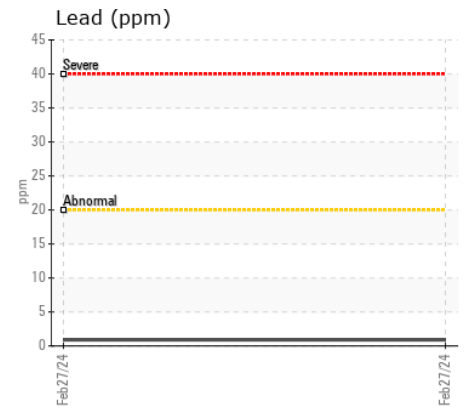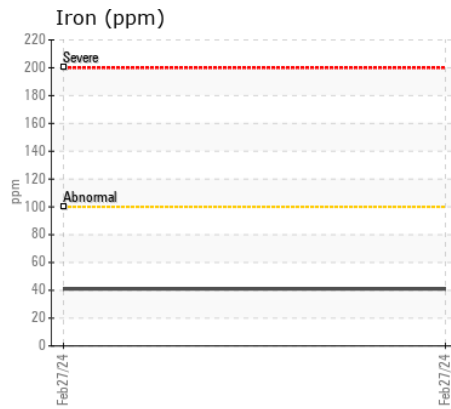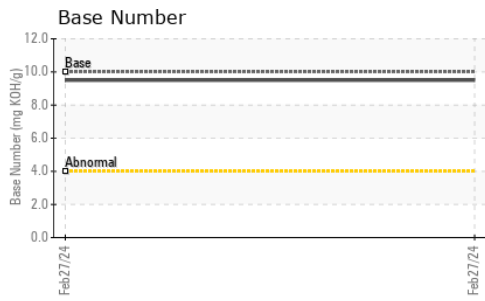

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP425197
Lab Number : 06105688
Unique Number : 10903918
Test Package : MOB 1 (Additional Tests: TBN)

Received : 01 Mar 2024
Tested : 01 Mar 2024
Diagnosed : 01 Mar 2024 - Wes Davis

IAA - INSURANCE AUTO AUCTIONS - NASHVILLE
 3896 STEWARTS LN
 NASHVILLE, TN
 US 37218
 Contact: KODY

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: