



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**(BD38668)**  
Machine Id  
**413022**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0092977</b>	GFL0092966	GFL0092952
Sample Date		Client Info		<b>19 Feb 2024</b>	27 Nov 2023	27 Oct 2023
Machine Age	hrs	Client Info		<b>1907</b>	1512	1335
Oil Age	hrs	Client Info		<b>1512</b>	1335	1043
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>17</b>	4	10
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>3</b>	1	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	2	7
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	<1	3
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	4	7
Potassium	ppm	ASTM D5185m	>20	<b>14</b>	4	16
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.4</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.3</b>	6.1	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.0</b>	17.9	18.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>7</b>	4	7
Boron	ppm	ASTM D5185m	250	<b>2</b>	<1	3
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	100	<b>65</b>	58	65
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	450	<b>948</b>	992	980
Calcium	ppm	ASTM D5185m	3000	<b>1031</b>	1081	1104
Phosphorus	ppm	ASTM D5185m	1150	<b>1028</b>	1047	1065
Zinc	ppm	ASTM D5185m	1350	<b>1223</b>	1263	1284
Sulfur	ppm	ASTM D5185m	4250	<b>2928</b>	3113	3550
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.0</b>	13.9	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.6</b>	8.7	8.4
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.2</b>	13.6	13.4

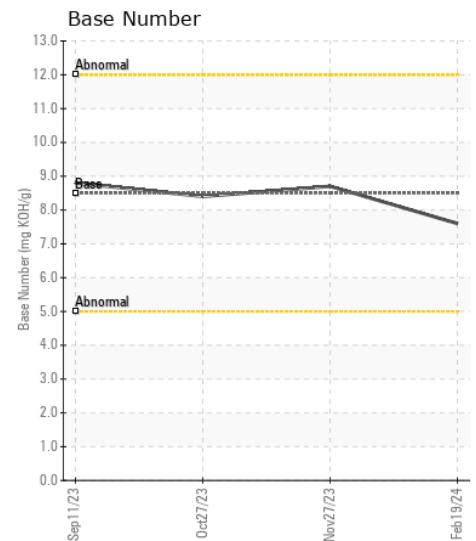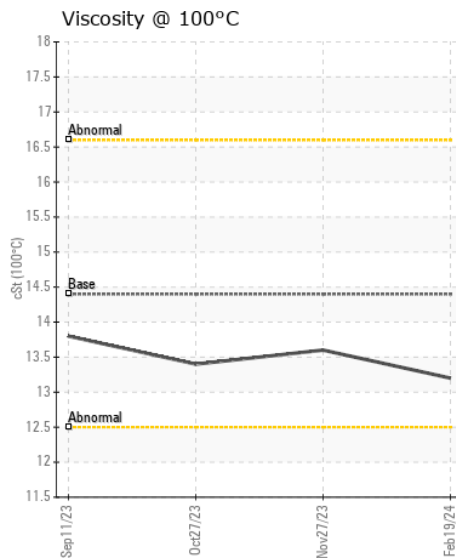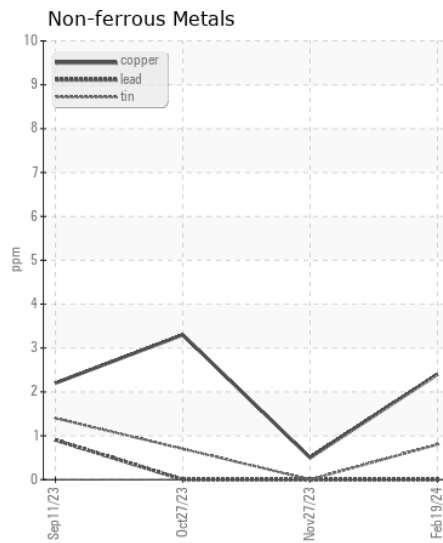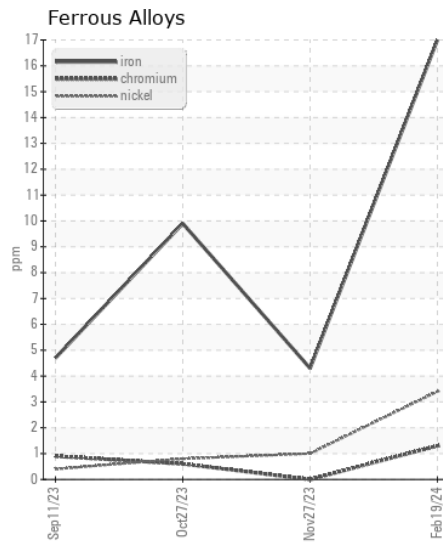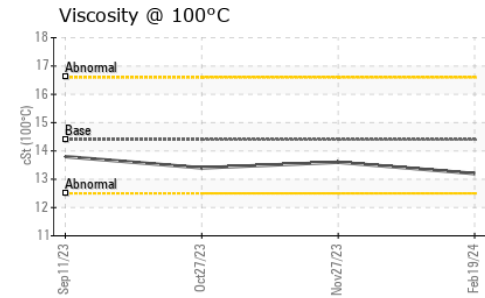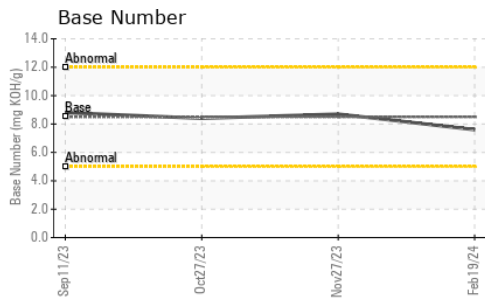

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092977  
**Lab Number** : 06105706  
**Unique Number** : 10903936  
**Test Package** : FLEET

**Received** : 01 Mar 2024  
**Tested** : 01 Mar 2024  
**Diagnosed** : 01 Mar 2024 - Wes Davis

**GFL Environmental - 463 - Cheboygan**  
 501 N. Western Ave  
 Cheboygan, MI  
 US 49721  
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: