



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**CDA**  
Machine Id  
**CDA**  
Component  
**Starboard Main Engine**  
Fluid  
**CHEVRON DELO 710 LS (350 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0050798</b>	MW0054974	MW0044042
Sample Date		Client Info		<b>16 Dec 2023</b>	28 Aug 2023	08 Apr 2023
Machine Age	hrs	Client Info		<b>36636</b>	34104	31285
Oil Age	hrs	Client Info		<b>25516</b>	22507	19190
Filter Age	hrs	Client Info		<b>1246</b>	1441	791
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Changed	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>6</b>	13	15
Chromium	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>18	<b>&lt;1</b>	2	0
Copper	ppm	ASTM D5185m	>80	<b>6</b>	10	6
Tin	ppm	ASTM D5185m	>14	<b>2</b>	3	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>2</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	1	<1
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	0.5
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.8	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.7</b>	7.7	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>15.0</b>	15.5	15.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<b>&lt;1</b>	<1	2
Boron	ppm	ASTM D5185m		<b>37</b>	40	70
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>40</b>	47	22
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>11</b>	10	4
Calcium	ppm	ASTM D5185m		<b>3084</b>	3378	1705
Phosphorus	ppm	ASTM D5185m		<b>1</b>	4	127
Zinc	ppm	ASTM D5185m		<b>0</b>	0	0
Sulfur	ppm	ASTM D5185m		<b>1938</b>	2468	2024
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>7.6</b>	8.4	8.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>6.2</b>	6.3	6.8
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.7</b>	14.6	14.72

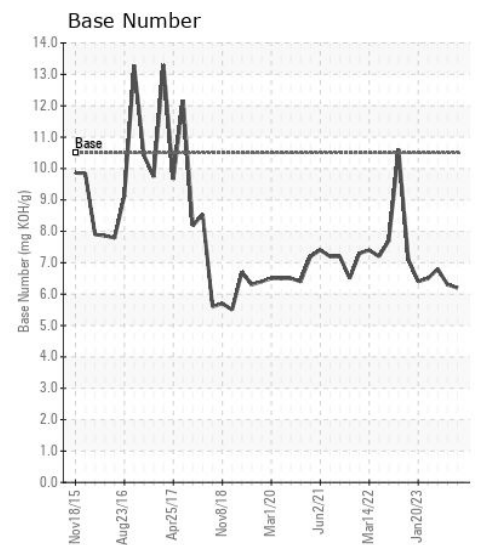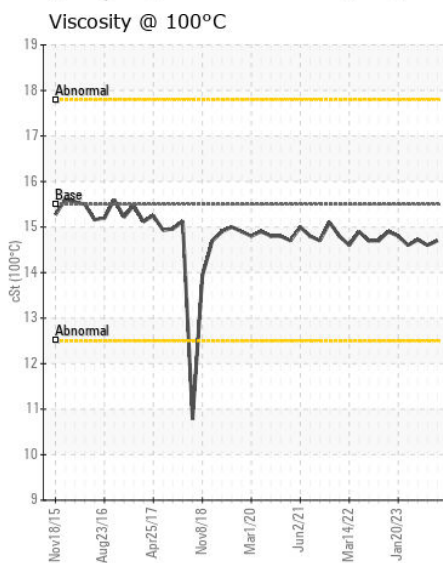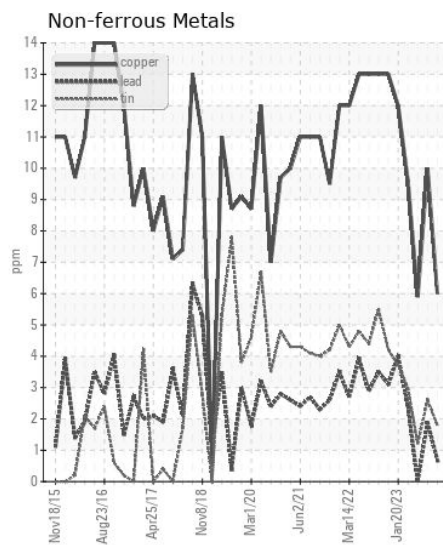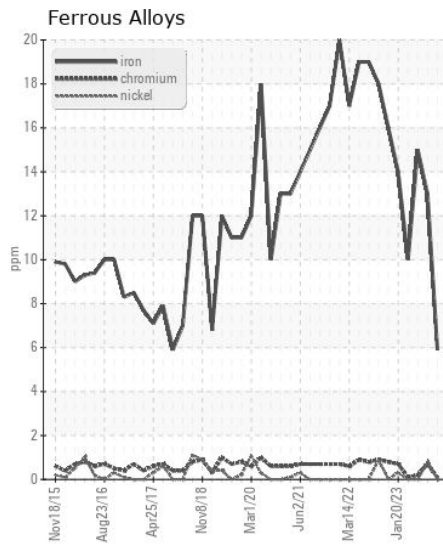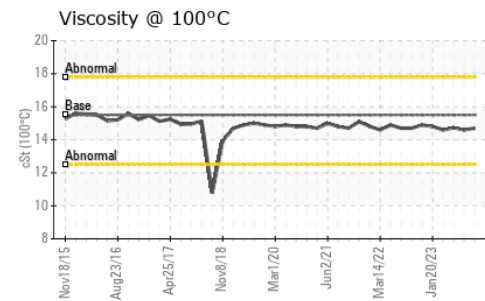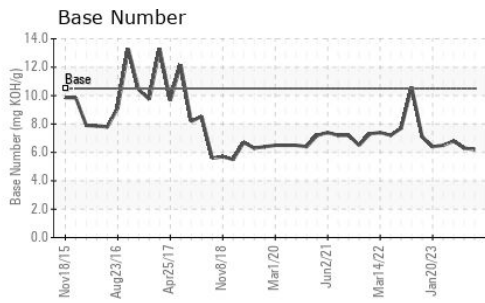

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0050798  
**Lab Number** : 06105799  
**Unique Number** : 10909296  
**Test Package** : MAR 2

**Received** : 01 Mar 2024  
**Tested** : 02 Mar 2024  
**Diagnosed** : 02 Mar 2024 - Wes Davis

**AMERICAN RIVER TRANSPORTATION CO.**  
 P.O. BOX 2889  
 ST. LOUIS, MO  
 US 63111  
 Contact: BRIAN GRIEWING  
 brian.griewing@adm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (314)481-5278