



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**725047-310032**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0095136</b>	GFL0090716	GFL0090635
Sample Date		Client Info		<b>12 Oct 2023</b>	25 Sep 2023	16 Aug 2023
Machine Age	hrs	Client Info		<b>18002</b>	17888	17649
Oil Age	hrs	Client Info		<b>0</b>	0	600
Filter Age	hrs	Client Info		<b>0</b>	0	600
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	Not Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	<b>13</b>	10	37
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	<1	4
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>85	<b>&lt;1</b>	0	1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>4</b>	3	6
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	1	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	8.3	11.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.0</b>	19.8	22.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>10</b>	8	22
Boron	ppm	ASTM D5185m	0	<b>12</b>	0	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>55</b>	43	62
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>829</b>	697	985
Calcium	ppm	ASTM D5185m	1070	<b>1046</b>	768	1206
Phosphorus	ppm	ASTM D5185m	1150	<b>930</b>	725	1002
Zinc	ppm	ASTM D5185m	1270	<b>1174</b>	911	1270
Sulfur	ppm	ASTM D5185m	2060	<b>2718</b>	2225	3288
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.9</b>	16.6	20.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.2</b>	8.3	6.9
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.3	14.4

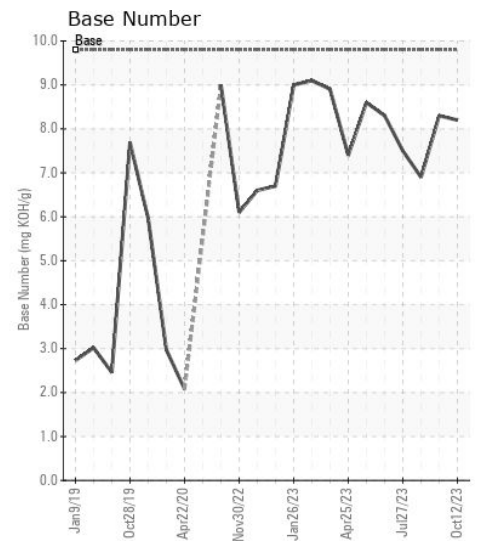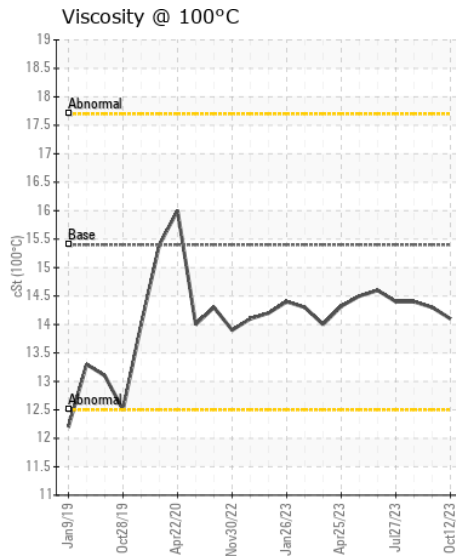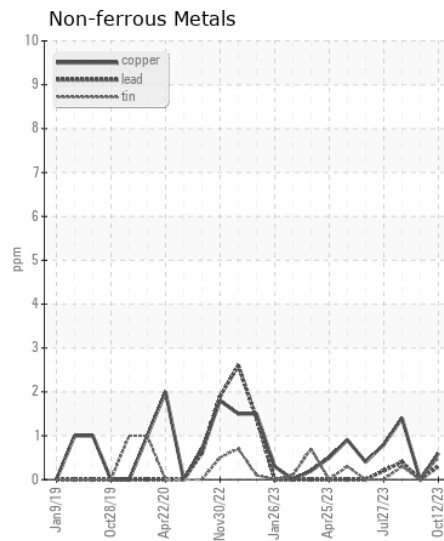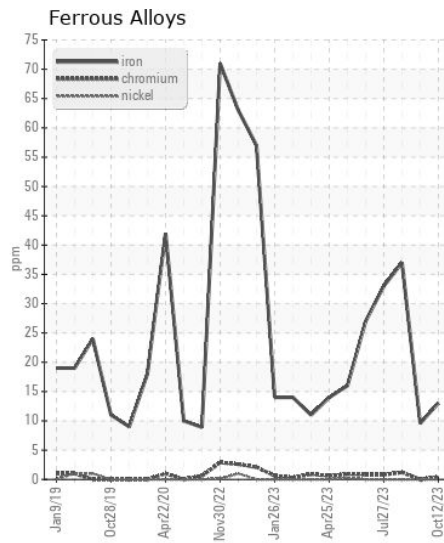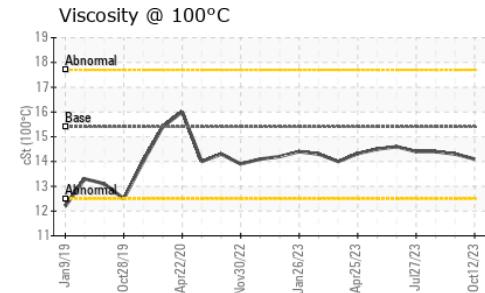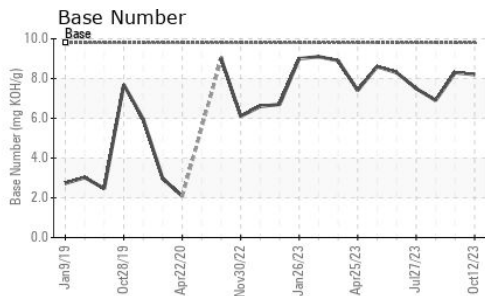

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0095136  
**Lab Number** : 06105822  
**Unique Number** : 10909319  
**Test Package** : FLEET

**Received** : 01 Mar 2024  
**Tested** : 02 Mar 2024  
**Diagnosed** : 02 Mar 2024 - Wes Davis

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: