



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
JOHN DEERE 410E 1DW410EBEMF708701
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | JR0206528 | JR0193177 | JR0161275 |
| Sample Date | | Client Info | | 28 Feb 2024 | 20 Dec 2023 | 11 May 2023 |
| Machine Age | hrs | Client Info | | 4707 | 4707 | 3473 |
| Oil Age | hrs | Client Info | | 4707 | 1234 | 500 |
| Filter Age | hrs | Client Info | | 0 | 0 | 500 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | MARGINAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >51 | 3 | 3 | 11 |
| Chromium | ppm | ASTM D5185m | >11 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >5 | 0 | 0 | 2 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >31 | 4 | 5 | 6 |
| Lead | ppm | ASTM D5185m | >26 | <1 | 0 | 6 |
| Copper | ppm | ASTM D5185m | >26 | 3 | 2 | 9 |
| Tin | ppm | ASTM D5185m | >4 | 1 | <1 | 3 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION







There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >22 | 5 | 6 | 8 |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 2 | 3 |
| Fuel | | WC Method | >2.1 | <1.0 | <1.0 | ▲ 3.6 |
| Water | | WC Method | >0.21 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.2 | 0.3 | 0.3 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 8.1 | 7.7 | 9.7 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.2 | 21.6 | 22.0 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|-----|--------------|------|------|
| Sodium | ppm | ASTM D5185m | >31 | 2 | 0 | 4 |
| Boron | ppm | ASTM D5185m | | 214 | 255 | 171 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 220 | 230 | 217 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | 723 | 782 | 786 |
| Calcium | ppm | ASTM D5185m | | 1211 | 1302 | 1386 |
| Phosphorus | ppm | ASTM D5185m | | 792 | 918 | 838 |
| Zinc | ppm | ASTM D5185m | | 988 | 1041 | 1018 |
| Sulfur | ppm | ASTM D5185m | | 2645 | 2874 | 3530 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 15.5 | 15.8 | 16.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 8.5 | 9.0 | 7.6 |
| Visc @ 100°C | cSt | ASTM D445 | | 12.6 | 13.1 | 12.1 |

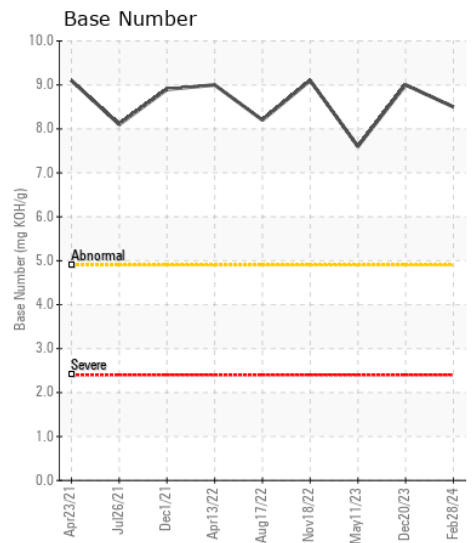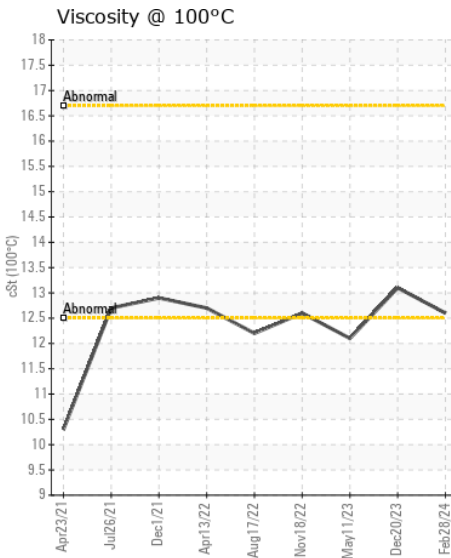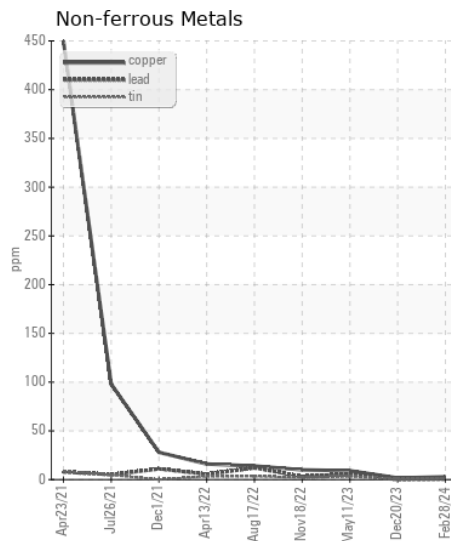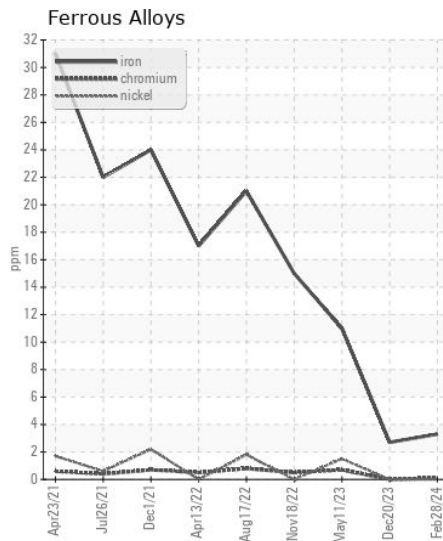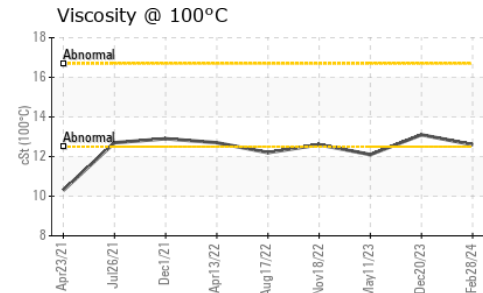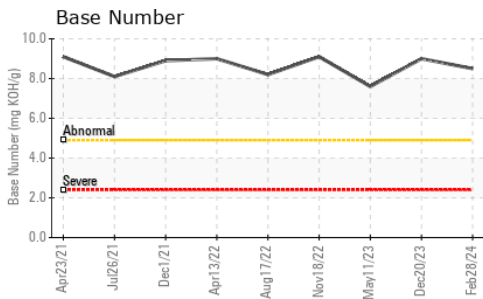

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0206528 **Received** : 01 Mar 2024
Lab Number : 06105882 **Tested** : 02 Mar 2024
Unique Number : 10909379 **Diagnosed** : 04 Mar 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211

F: (704)596-6198