



**James River
Equipment**

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 550K 1T0550KXKEE265236

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0204795	JR0174000	JR0099797
Sample Date		Client Info		29 Feb 2024	18 May 2023	17 Nov 2021
Machine Age	hrs	Client Info		5106	4620	4115
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	23	27	26
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>31	6	4	3
Lead	ppm	ASTM D5185m	>26	19	17	23
Copper	ppm	ASTM D5185m	>26	3	5	4
Tin	ppm	ASTM D5185m	>4	1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	7	7	7
Potassium	ppm	ASTM D5185m	>20	1	4	2
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.3	1.2	1.1
Nitration	Abs/cm	*ASTM D7624	>20	10.4	10.7	10.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.3	27.2	26.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	4	0
Boron	ppm	ASTM D5185m		143	122	153
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		250	229	242
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		817	662	743
Calcium	ppm	ASTM D5185m		1438	1547	1668
Phosphorus	ppm	ASTM D5185m		874	837	855
Zinc	ppm	ASTM D5185m		1113	1040	1006
Sulfur	ppm	ASTM D5185m		2900	2846	2473
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.6	20.6	20.1
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.8	8.3	8.9
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	14.6	14.4

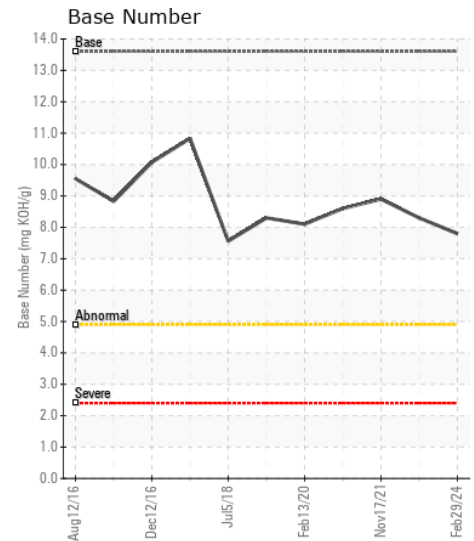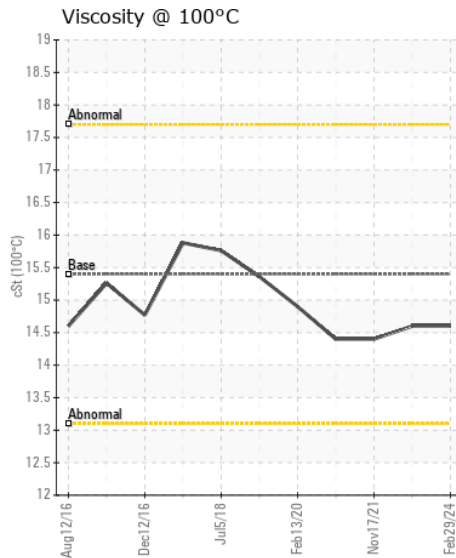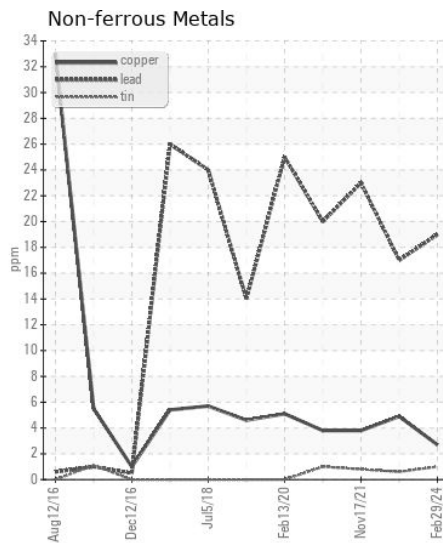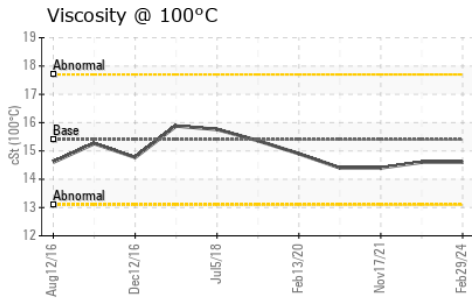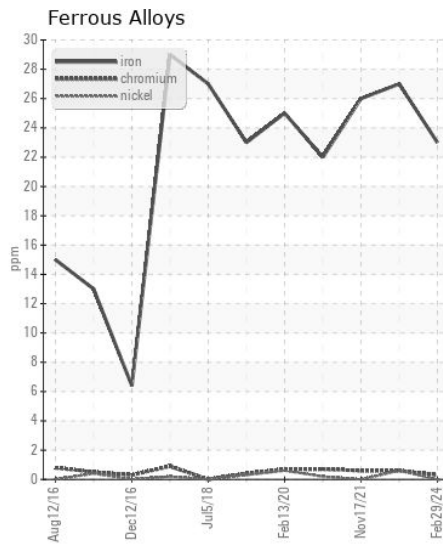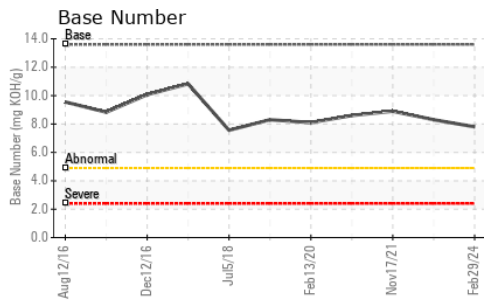

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0204795 **Received** : 01 Mar 2024
Lab Number : 06105886 **Tested** : 02 Mar 2024
Unique Number : 10909383 **Diagnosed** : 02 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)