



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
BELL B30E AEBA631EA03410585
Component
Diesel Engine
Fluid
CHEVRON URSA SUPER PLUS EC 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		BE0022347	BE0022346	---
Sample Date		Client Info		27 Feb 2024	07 Sep 2023	---
Machine Age	hrs	Client Info		1009	536	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>79	17	13	---
Iron	ppm	ASTM D5185m	>100	20	35	---
Chromium	ppm	ASTM D5185m	>20	<1	2	---
Nickel	ppm	ASTM D5185m	>4	0	1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	5	9	---
Lead	ppm	ASTM D5185m	>40	<1	<1	---
Copper	ppm	ASTM D5185m	>330	10	29	---
Tin	ppm	ASTM D5185m	>15	1	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	11	---
Potassium	ppm	ASTM D5185m	>20	2	6	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	8.1	11.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	17.9	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	6	---
Boron	ppm	ASTM D5185m		266	107	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		76	44	---
Manganese	ppm	ASTM D5185m		2	10	---
Magnesium	ppm	ASTM D5185m		464	895	---
Calcium	ppm	ASTM D5185m		1394	1356	---
Phosphorus	ppm	ASTM D5185m	1200	989	779	---
Zinc	ppm	ASTM D5185m	1300	1225	909	---
Sulfur	ppm	ASTM D5185m		3084	3073	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.1	14.2	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	7.6	8.9	---
Visc @ 40°C	cSt	ASTM D445	117	90.7	69.3	---
Visc @ 100°C	cSt	ASTM D445	15.4	12.9	11.6	---
Viscosity Index (VI)	Scale	ASTM D2270	138	140	162	---

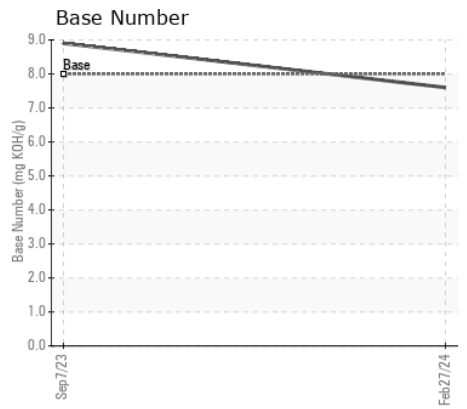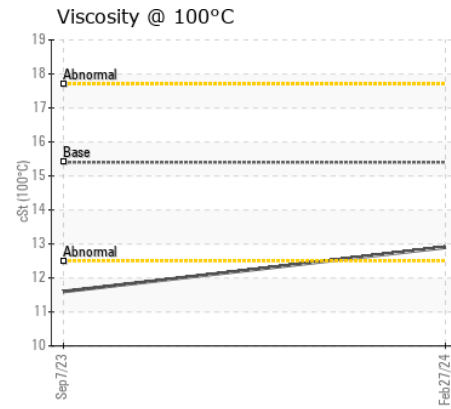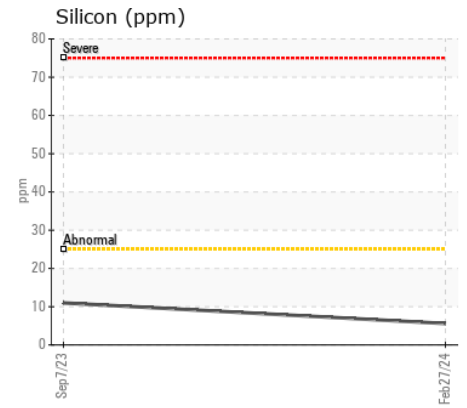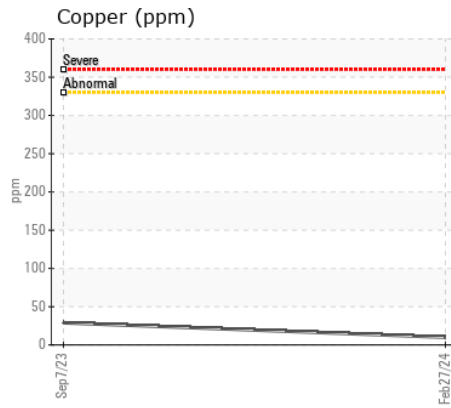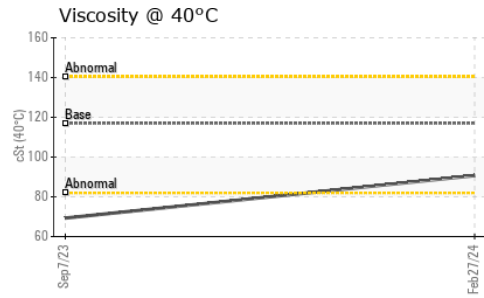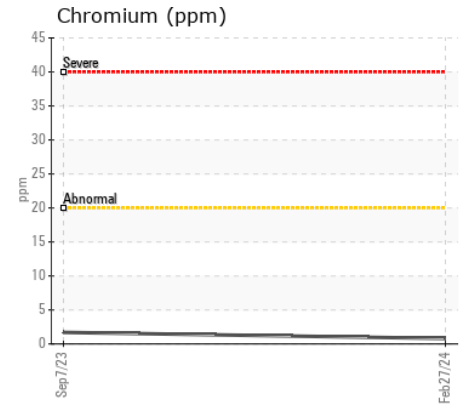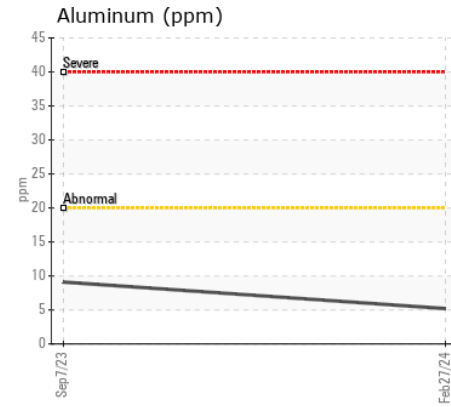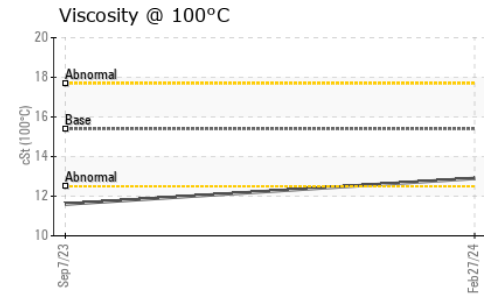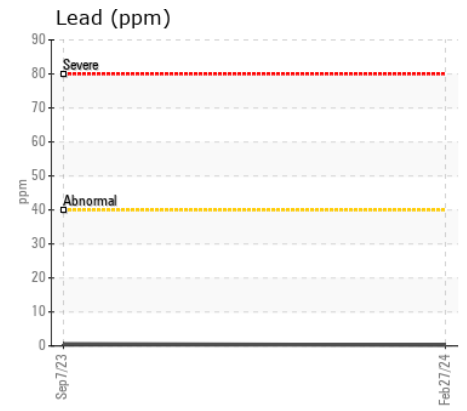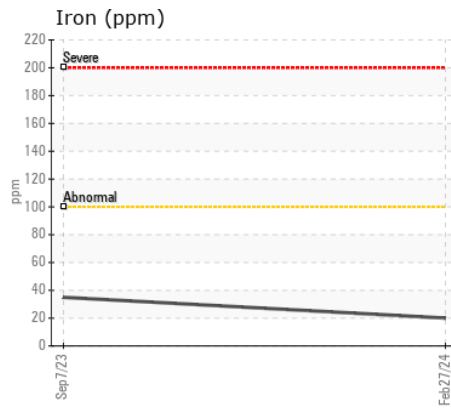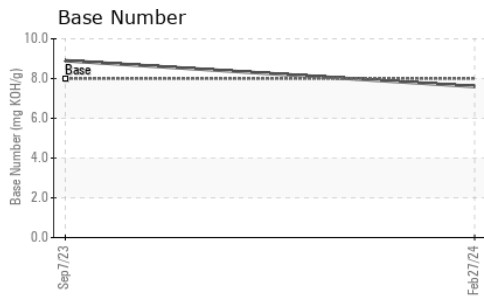

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : BE0022347
Lab Number : 06105931
Unique Number : 10909428
Test Package : MOBCE

Received : 01 Mar 2024
Tested : 06 Mar 2024
Diagnosed : 06 Mar 2024 - Jonathan Hester

National Equipment Dealers LLC NE
 215 Woodside Drive
 Lexington, NC
 US 27292
 Contact: Steven Gawthrop
 sgawthrop@nedealers.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: