



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>SEVERE</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 1025R 1LV1025RKNN842315**

Component  
**Hydraulic System**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS LOW VIS (--- QTS)**

### RECOMMENDATION

Check seals and/or filters for points of contaminant entry. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. We recommend you service the filters on this component. Resample in 30-45 days to monitor this situation.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0209775</b>	---	---
Sample Date		Client Info		<b>29 Feb 2024</b>	---	---
Machine Age	hrs	Client Info		<b>128</b>	---	---
Oil Age	hrs	Client Info		<b>128</b>	---	---
Filter Age	hrs	Client Info		<b>128</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Not Chngd</b>	---	---
Sample Status				<b>SEVERE</b>	---	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<b>17</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>4</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>14</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION











There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>11</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Particles >4µm		ASTM D7647	>5000	<b>▲ 143796</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>▲ 22895</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>138</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>12</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>▲ 24/22/14</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185m		<b>3</b>	---	---
Boron	ppm	ASTM D5185m		<b>4</b>	---	---
Barium	ppm	ASTM D5185m		<b>4</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>91</b>	---	---
Calcium	ppm	ASTM D5185m		<b>3059</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>955</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1066</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3229</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.89</b>	---	---
Visc @ 40°C	cSt	ASTM D445	32	<b>30.4</b>	---	---

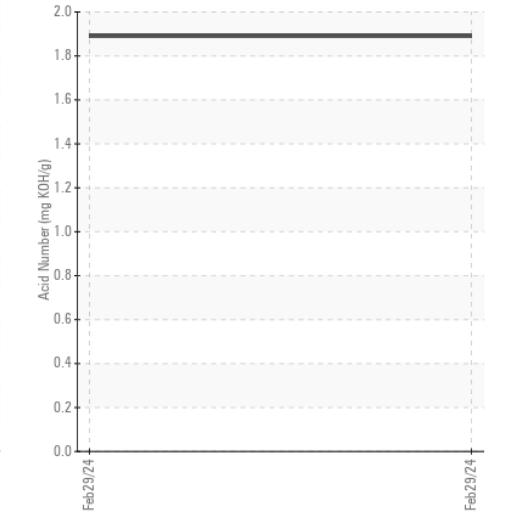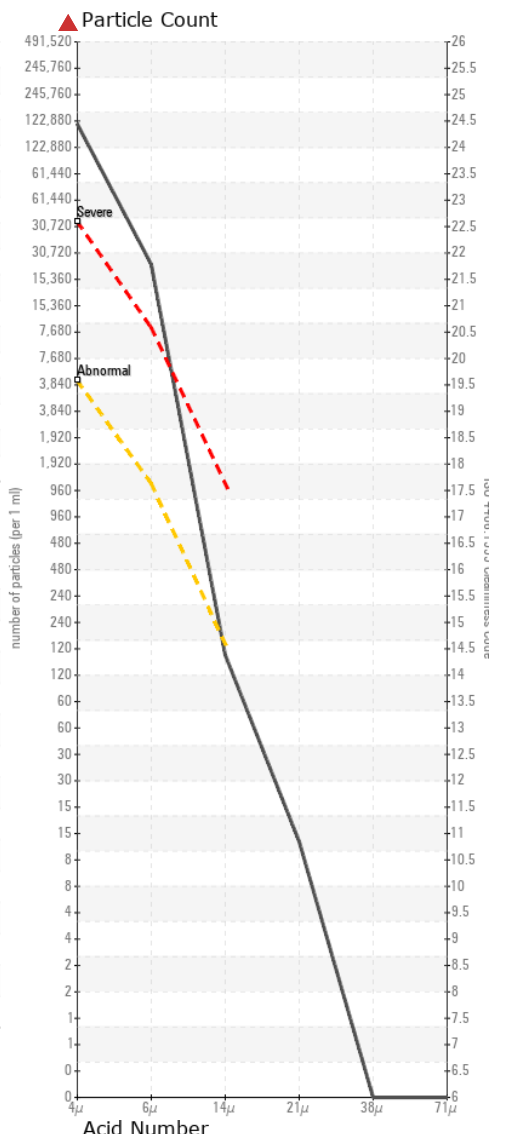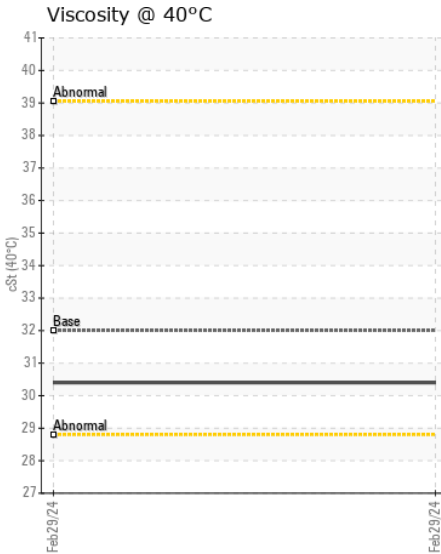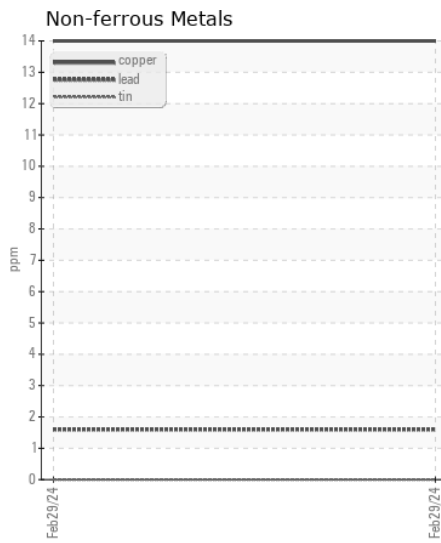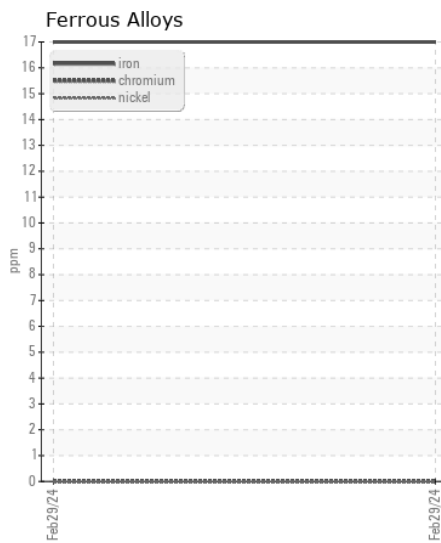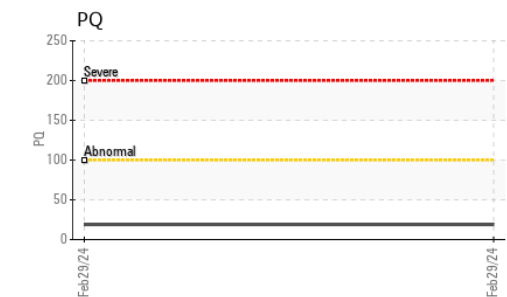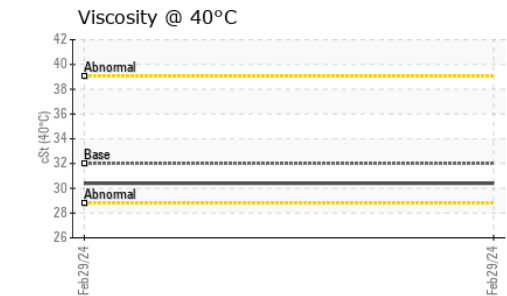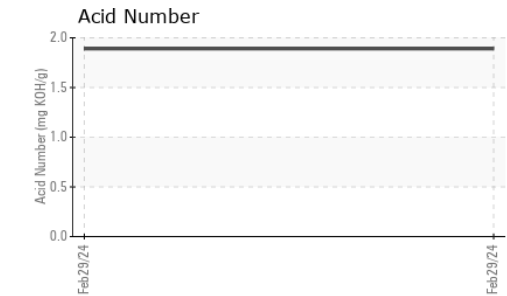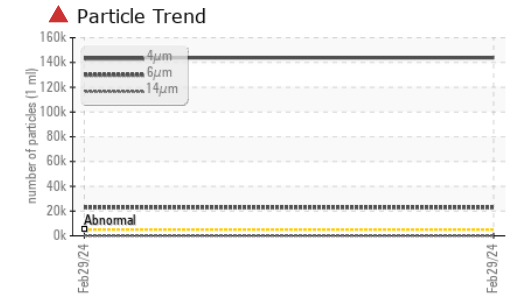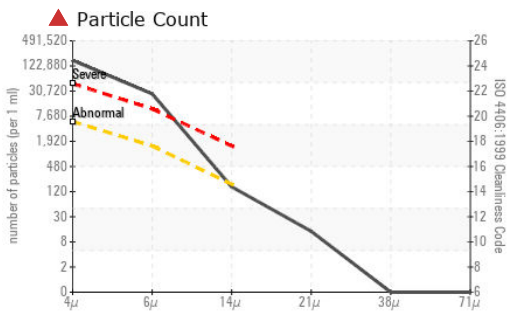

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0209775 **Received** : 01 Mar 2024  
**Lab Number** : 06105938 **Tested** : 04 Mar 2024  
**Unique Number** : 10909435 **Diagnosed** : 04 Mar 2024 - Wes Davis  
**Test Package** : MOBCE ( Additional Tests: PQ )

**JRE - WILKESBORO**  
 288 WESTGATE DRIVE  
 WILKESBORO, NC  
 US 28697  
 Contact: BUTCH JANES  
 bjanes@jamesriverequipment.com  
 T: (336)973-8201  
 F: (336)973-8496

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)