



**James River  
Equipment**

OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 770GP 1DW770GPHKF701618**  
Component  
**Transmission (Manual)**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0204755</b>	JR0134615	JR0064272
Sample Date		Client Info		<b>02 Mar 2024</b>	05 Aug 2022	02 Oct 2020
Machine Age	hrs	Client Info		<b>3959</b>	3516	2460
Oil Age	hrs	Client Info		<b>0</b>	3516	0
Filter Age	hrs	Client Info		<b>0</b>	1509	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>18</b>	20	21
Iron	ppm	ASTM D5185m	>200	<b>22</b>	17	13
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	1
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	1	1
Copper	ppm	ASTM D5185m	>225	<b>8</b>	6	5
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>5</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	4	4
Boron	ppm	ASTM D5185m	6	<b>7</b>	15	7
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	1	<1
Manganese	ppm	ASTM D5185m		<b>2</b>	2	2
Magnesium	ppm	ASTM D5185m	145	<b>105</b>	91	102
Calcium	ppm	ASTM D5185m	3570	<b>3265</b>	3202	3819
Phosphorus	ppm	ASTM D5185m	1290	<b>1050</b>	926	1068
Zinc	ppm	ASTM D5185m	1640	<b>1214</b>	1146	1286
Sulfur	ppm	ASTM D5185m		<b>3636</b>	3341	3084
Visc @ 40°C	cSt	ASTM D445	57.0	<b>48.9</b>	49.0	49.5

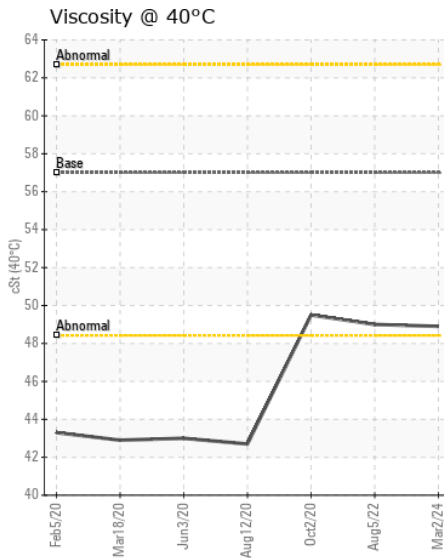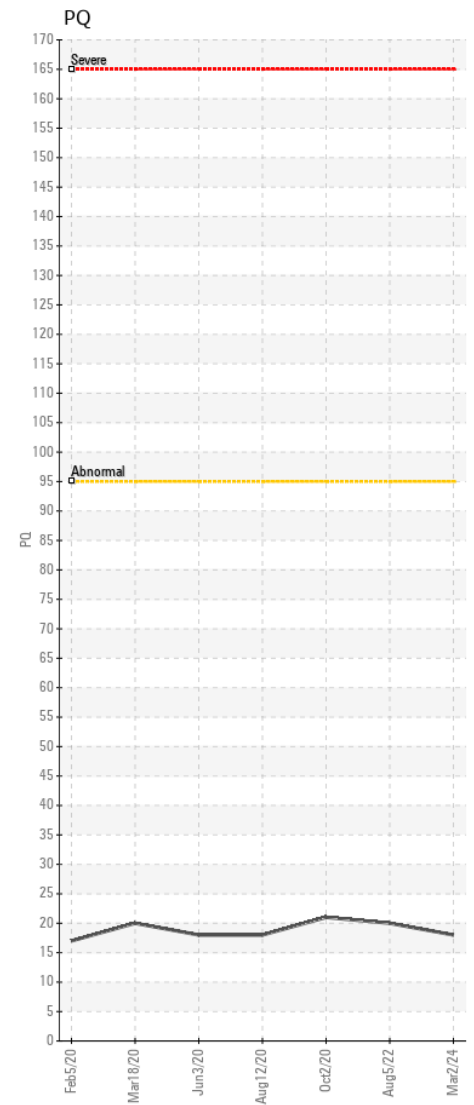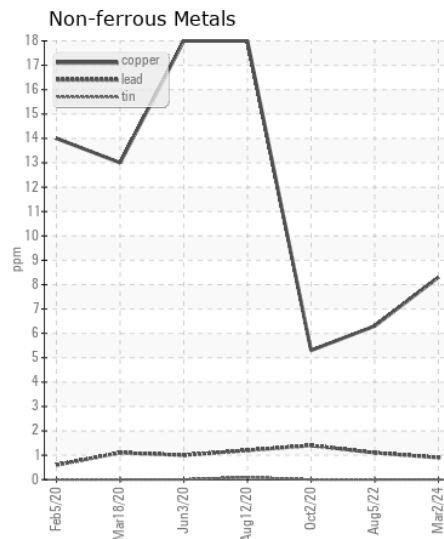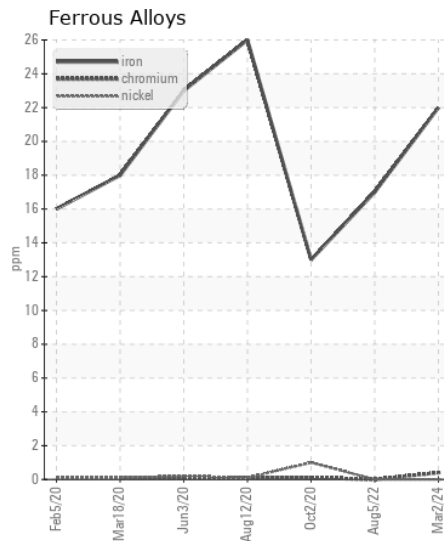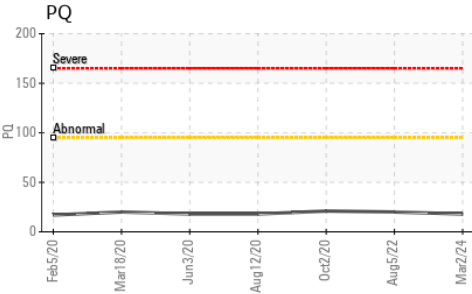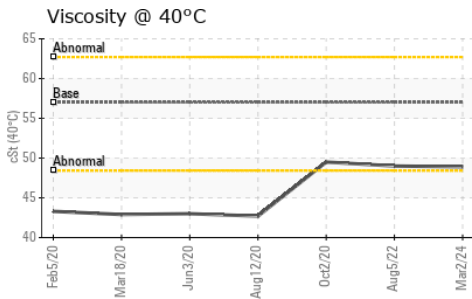

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0204755 **Received** : 01 Mar 2024  
**Lab Number** : 06106315 **Tested** : 04 Mar 2024  
**Unique Number** : 10909812 **Diagnosed** : 04 Mar 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM  
 T: (336)668-2762  
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)