



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 700K 1T0700KXLHF313766
 Component
Transmission
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0206542	JR0089518	---
Sample Date		Client Info		29 Feb 2024	06 Oct 2021	---
Machine Age	hrs	Client Info		5810	3495	---
Oil Age	hrs	Client Info		5810	0	---
Filter Age	hrs	Client Info		5810	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>100	19	12	---
Iron	ppm	ASTM D5185m	>61	16	8	---
Chromium	ppm	ASTM D5185m	>10	<1	0	---
Nickel	ppm	ASTM D5185m		0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	0	---
Lead	ppm	ASTM D5185m	>9	2	2	---
Copper	ppm	ASTM D5185m	>100	17	10	---
Tin	ppm	ASTM D5185m	>3	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>21	5	1	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>30	<1	<1	---
Boron	ppm	ASTM D5185m		0	<1	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		11	8	---
Calcium	ppm	ASTM D5185m	87	360	317	---
Phosphorus	ppm	ASTM D5185m	727	716	603	---
Zinc	ppm	ASTM D5185m	900	878	783	---
Sulfur	ppm	ASTM D5185m	1500	1929	1489	---
Visc @ 40°C	cSt	ASTM D445	65	54.5	56.1	---

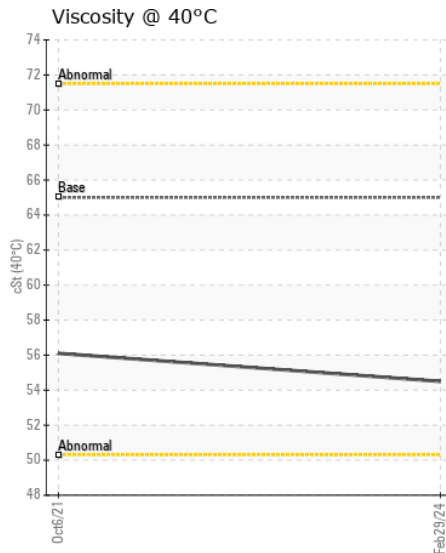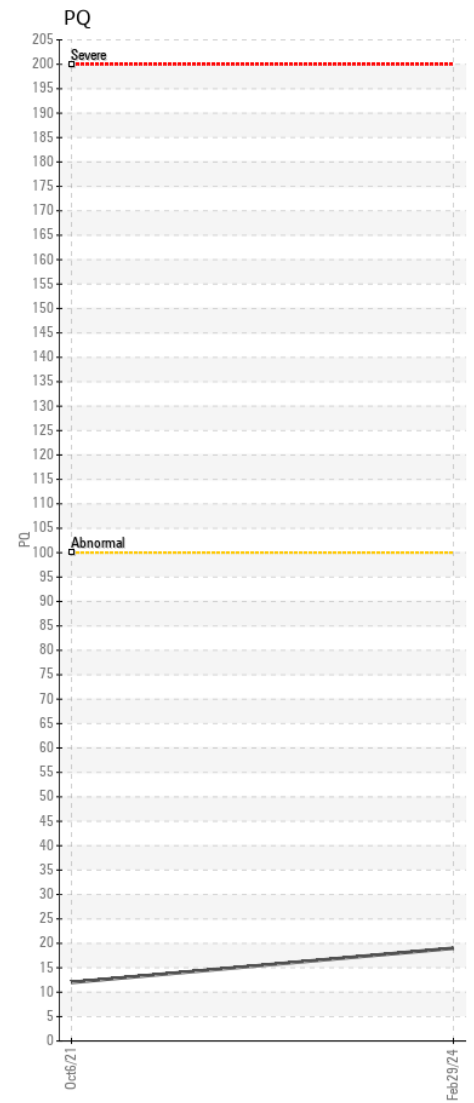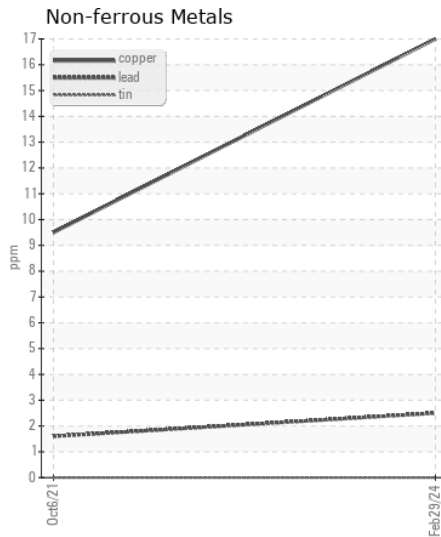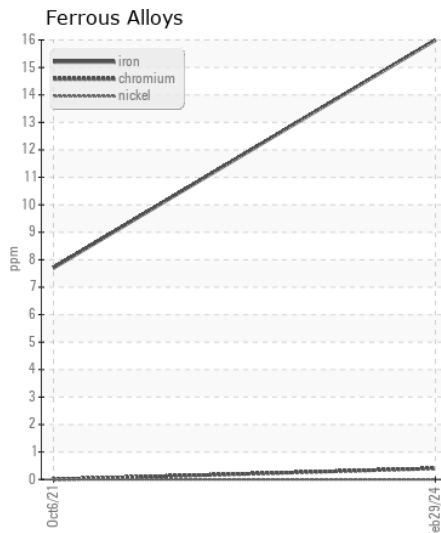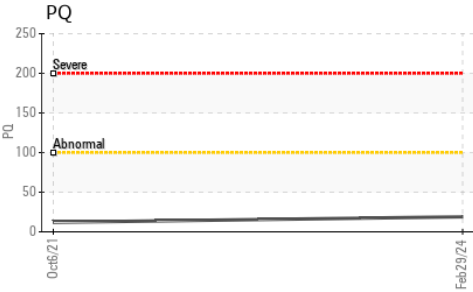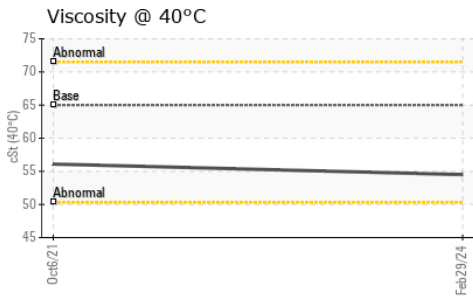

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0206542 **Received** : 01 Mar 2024
Lab Number : 06106321 **Tested** : 04 Mar 2024
Unique Number : 10909818 **Diagnosed** : 04 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)