



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 550K 1T0550KXKEE265236**  
Component  
**Right Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (3 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0204788</b>	JR0099795	JR0034742
Sample Date		Client Info		<b>02 Mar 2024</b>	17 Nov 2021	13 Feb 2020
Machine Age	hrs	Client Info		<b>5106</b>	4115	3164
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>26</b>	28	30
Iron	ppm	ASTM D5185m	>750	<b>10</b>	16	24
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	2	4
Lead	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>6</b>	8	14
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>1</b>	2	5
Boron	ppm	ASTM D5185m	6	<b>49</b>	50	49
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>44</b>	44	46
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	145	<b>214</b>	214	224
Calcium	ppm	ASTM D5185m	3570	<b>2762</b>	3177	3111
Phosphorus	ppm	ASTM D5185m	1290	<b>921</b>	997	1063
Zinc	ppm	ASTM D5185m	1640	<b>1131</b>	1223	1195
Sulfur	ppm	ASTM D5185m		<b>3103</b>	3192	3437
Visc @ 40°C	cSt	ASTM D445	57.0	<b>55.9</b>	53.3	54.2

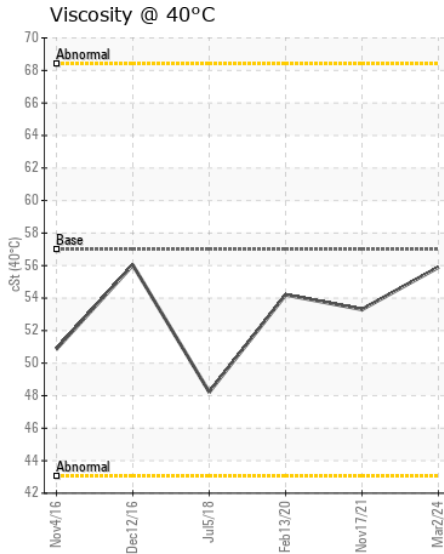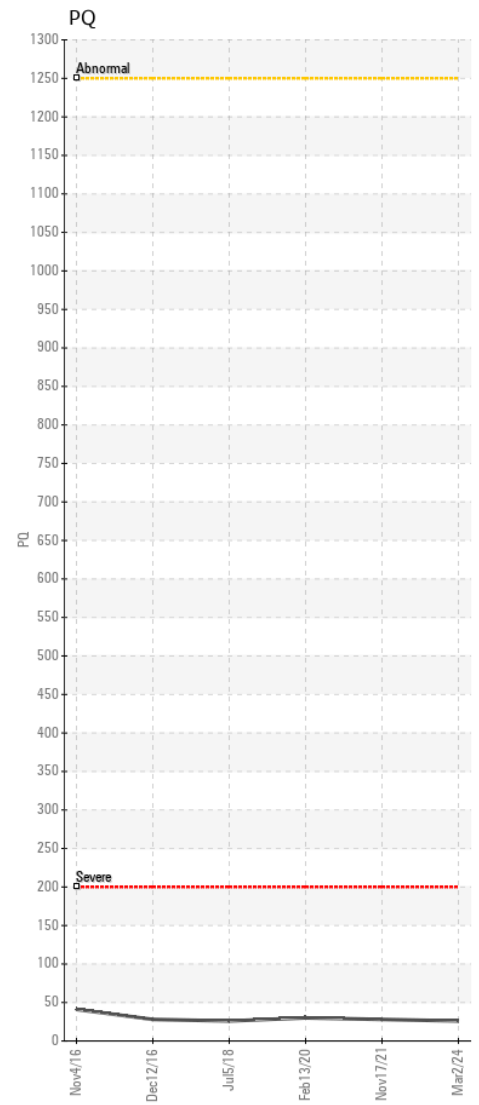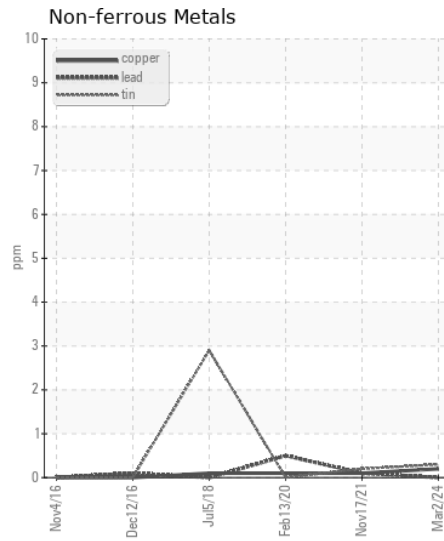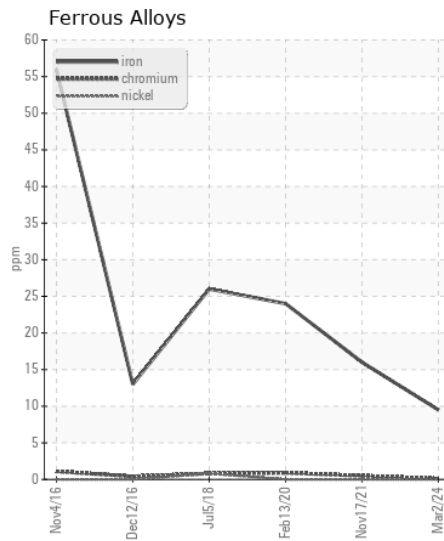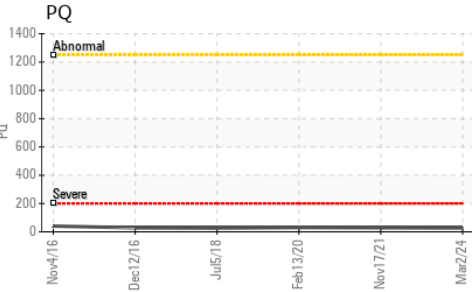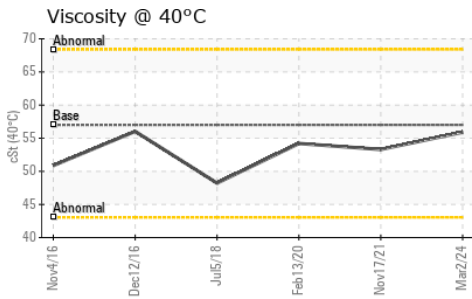

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0204788 **Received** : 01 Mar 2024  
**Lab Number** : 06106381 **Tested** : 05 Mar 2024  
**Unique Number** : 10909878 **Diagnosed** : 05 Mar 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: JUSTIN WILLIAMS  
 justin.williams@jamesriverequipment.com  
 T: (336)668-2762  
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)