



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 325G 1T0325GKCPJ447695
Component
Right Final Drive
Fluid
JOHN DEERE GL-5 80W90 (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0203390	---	---
Sample Date		Client Info		29 Feb 2024	---	---
Machine Age	hrs	Client Info		541	---	---
Oil Age	hrs	Client Info		541	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	315	---	---
Iron	ppm	ASTM D5185m	>750	918	---	---
Chromium	ppm	ASTM D5185m	>9	18	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	6	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	10	---	---
Potassium	ppm	ASTM D5185m	>20	40	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	11	---	---
Boron	ppm	ASTM D5185m		2	---	---
Barium	ppm	ASTM D5185m		62	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		9	---	---
Magnesium	ppm	ASTM D5185m		9	---	---
Calcium	ppm	ASTM D5185m		21	---	---
Phosphorus	ppm	ASTM D5185m		200	---	---
Zinc	ppm	ASTM D5185m		14	---	---
Sulfur	ppm	ASTM D5185m		14586	---	---
Visc @ 40°C	cSt	ASTM D445		135	---	---

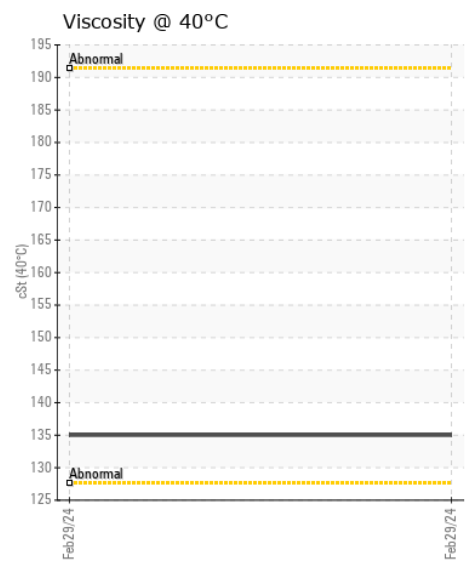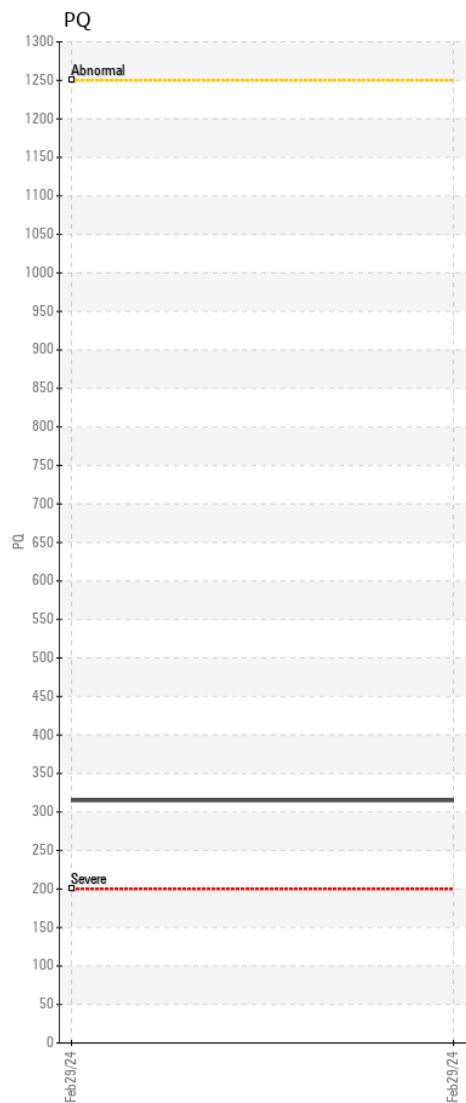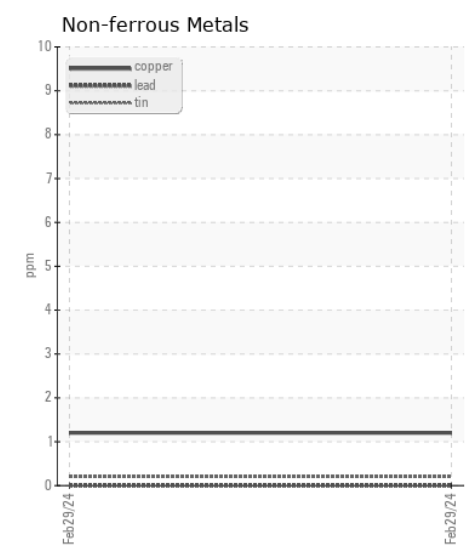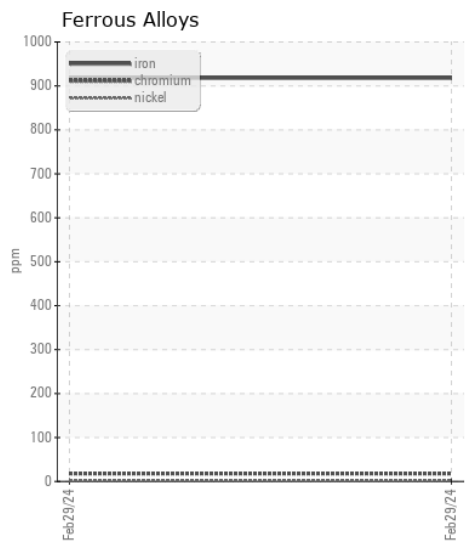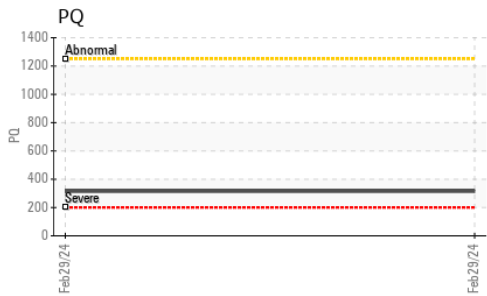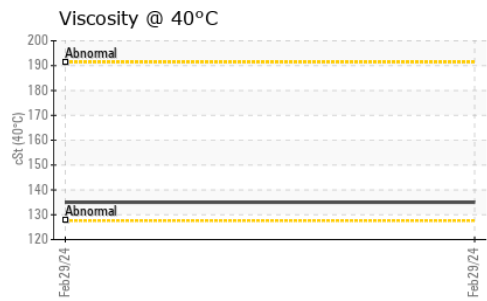

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0203390 **Received** : 01 Mar 2024
Lab Number : 06106389 **Tested** : 03 Mar 2024
Unique Number : 10909886 **Diagnosed** : 05 Mar 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

ALLSITE CONTRACTING
 11128 INDUSTRIAL RD
 MANASSAS, VA
 US 20109
 Contact: DAVE PARKER
 dave.parker@allsiteco.com
 T: (703)361-2499
 F: (703)361-6169

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)