



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624 P 1DW624PAANLZ14651

Component
Brake

Fluid
JOHN DEERE HY-GARD HYD/TRANS (1 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0208580	JR0169019	JR0166280
Sample Date		Client Info		29 Feb 2024	31 Jul 2023	21 Mar 2023
Machine Age	hrs	Client Info		1967	1441	967
Oil Age	hrs	Client Info		1493	474	967
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		None	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		22	16	27
Iron	ppm	ASTM D5185m	>350	29	47	46
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		<1	1	6
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>8	2	3	2
Lead	ppm	ASTM D5185m	>10	4	4	7
Copper	ppm	ASTM D5185m	>150	1	1	4
Tin	ppm	ASTM D5185m	>5	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	HEAVY
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	53	86	196
Potassium	ppm	ASTM D5185m	>20	2	4	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		9	13	12
Boron	ppm	ASTM D5185m	6	40	53	147
Barium	ppm	ASTM D5185m	0	4	2	0
Molybdenum	ppm	ASTM D5185m	0	48	65	281
Manganese	ppm	ASTM D5185m		1	2	3
Magnesium	ppm	ASTM D5185m	145	163	198	534
Calcium	ppm	ASTM D5185m	3570	2693	3141	1386
Phosphorus	ppm	ASTM D5185m	1290	880	1007	653
Zinc	ppm	ASTM D5185m	1640	1108	1222	800
Sulfur	ppm	ASTM D5185m		3097	4818	2512
Visc @ 40°C	cSt	ASTM D445	57.0	52.7	53.5	48.6

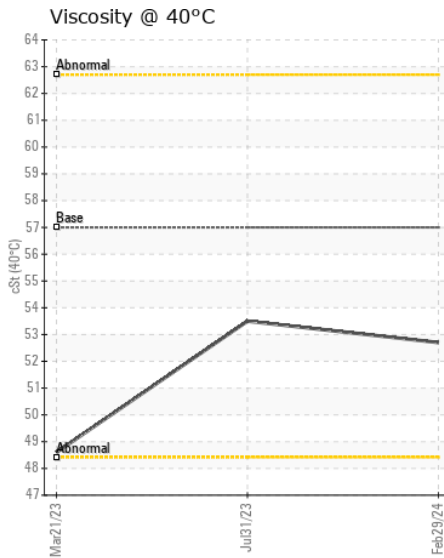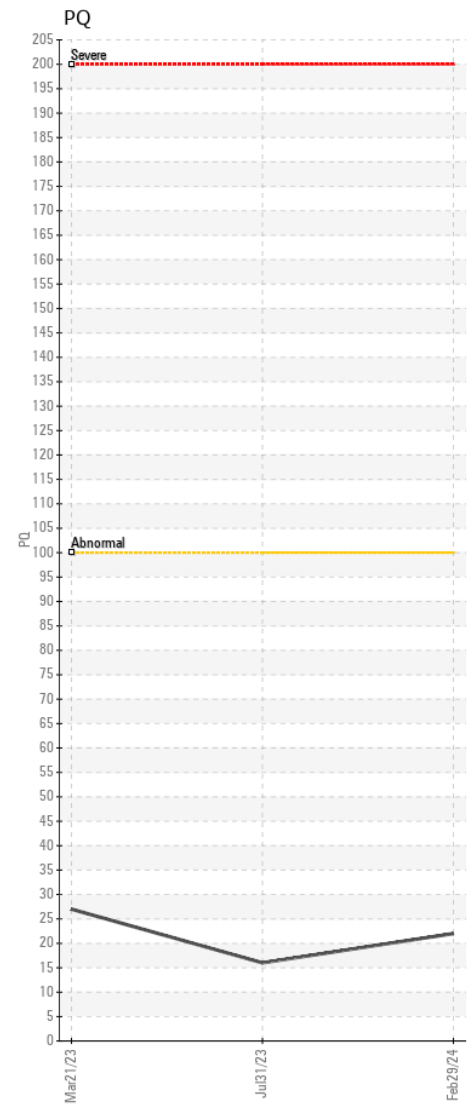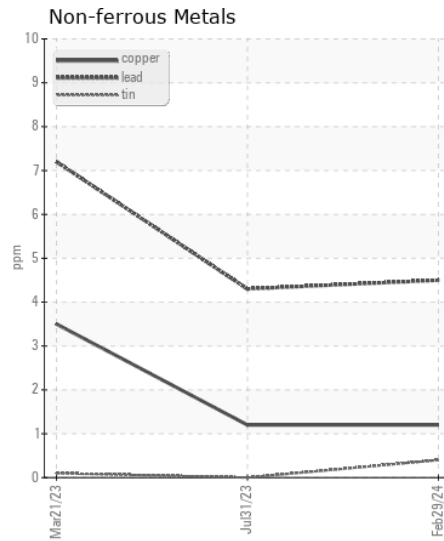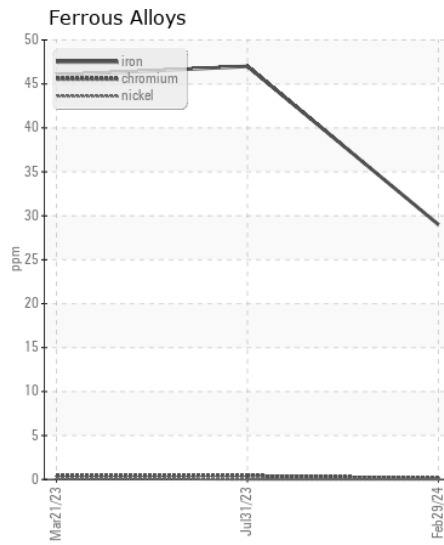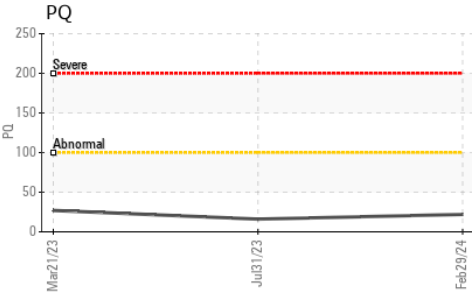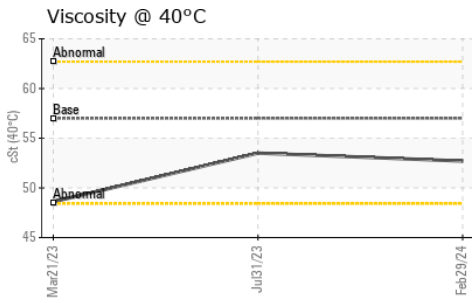

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0208580 **Received** : 01 Mar 2024
Lab Number : 06106390 **Tested** : 03 Mar 2024
Unique Number : 10909887 **Diagnosed** : 05 Mar 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)