



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[687963]
Machine Id
VOLVO A30 753223
Component
Rear Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP455016	VCP437684	VCP431290
Sample Date		Client Info		13 Mar 2024	04 Jan 2024	16 Oct 2023
Machine Age	hrs	Client Info		2013	1548	1012
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	135	114	468
Chromium	ppm	ASTM D5185m	>20	<1	2	8
Nickel	ppm	ASTM D5185m	>10	0	<1	4
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	0	0	<1
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	10	10	43
Tin	ppm	ASTM D5185m	>20	0	<1	2
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	2	2	6
Potassium	ppm	ASTM D5185m	>20	0	0	5
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	LIGHT
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	1	2
Boron	ppm	ASTM D5185m	111	180	177	252
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.9	2	<1	6
Manganese	ppm	ASTM D5185m	0.0	2	3	13
Magnesium	ppm	ASTM D5185m	39	12	18	0
Calcium	ppm	ASTM D5185m	93	159	163	485
Phosphorus	ppm	ASTM D5185m	920	931	1116	1425
Zinc	ppm	ASTM D5185m	104	83	84	193
Sulfur	ppm	ASTM D5185m	20179	27853	26361	22529
Visc @ 40°C	cSt	ASTM D445	333	240	240	96.8

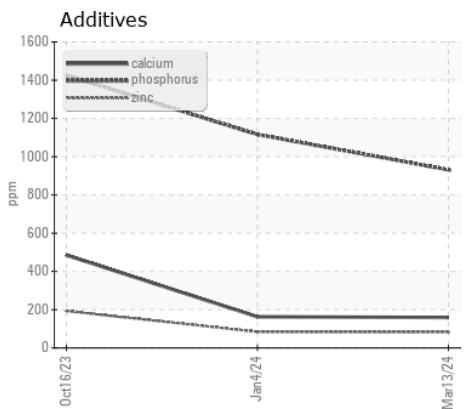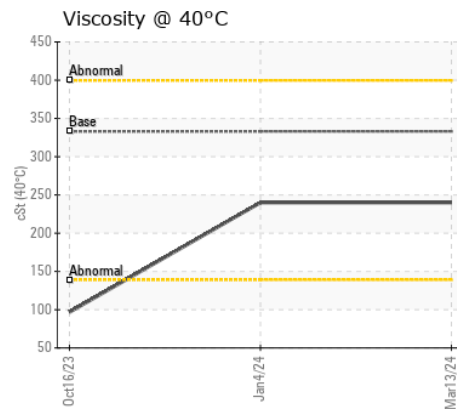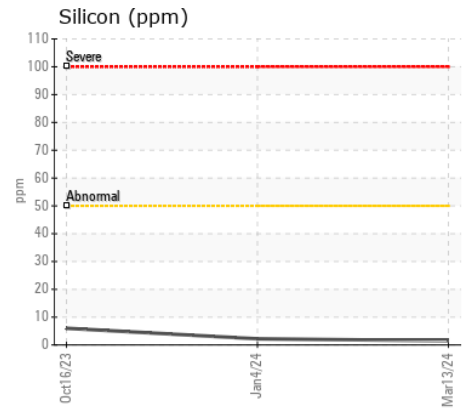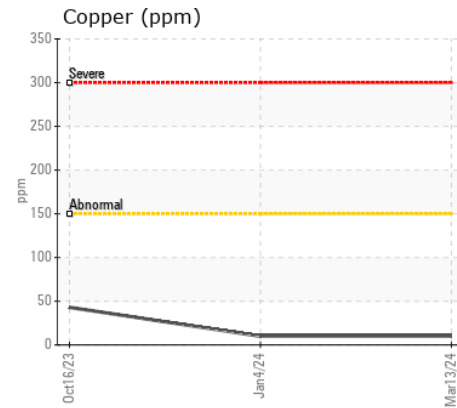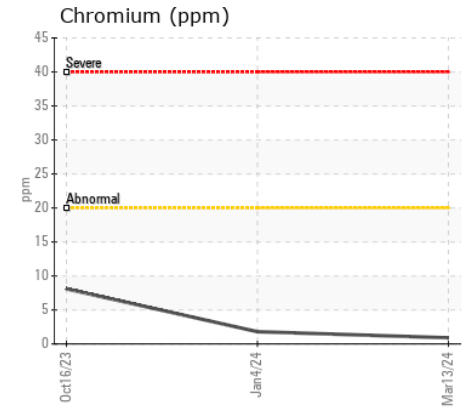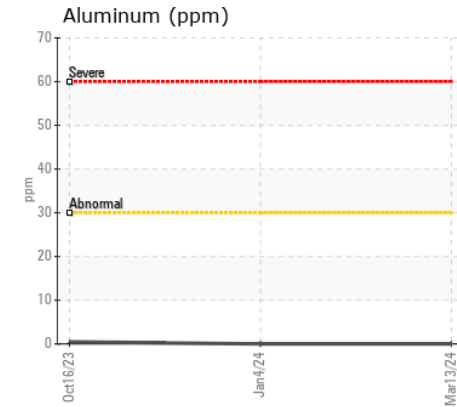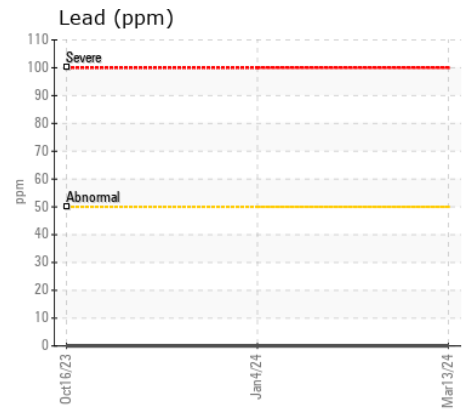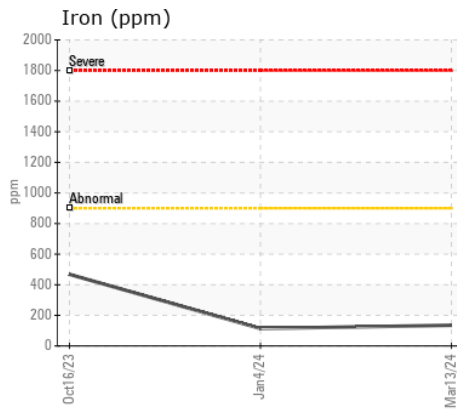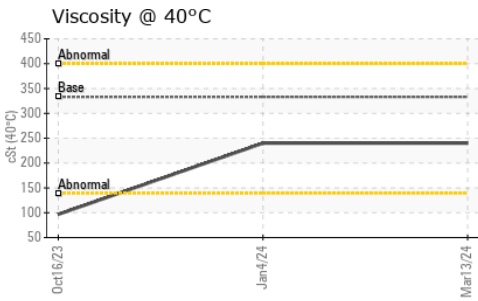

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP455016
Lab Number : 06121191
Unique Number : 10930024
Test Package : MOB 1

Received : 18 Mar 2024
Tested : 19 Mar 2024
Diagnosed : 19 Mar 2024 - Wes Davis

BLUE GOOSE GROWERS
 16059 W ORANGE AVE
 FT PIERCE, FL
 US 34945
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (772)461-3020

F: