



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
CROSS [CROSS SERVICE]
Machine Id
VOLVO PENTA 3950004234
Component
Port IPS
Fluid
VOLVO API GL-5 SAE 75W90 (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA057349	VPA044894	---
Sample Date		Client Info		12 Mar 2024	08 Mar 2023	---
Machine Age	hrs	Client Info		570	489	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		17	16	---
Iron	ppm	ASTM D5185m	>200	67	30	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		2	1	---
Lead	ppm	ASTM D5185m		<1	0	---
Copper	ppm	ASTM D5185m		13	6	---
Tin	ppm	ASTM D5185m		<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		2	1	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		8	5	---
Boron	ppm	ASTM D5185m		302	254	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		1	<1	---
Manganese	ppm	ASTM D5185m		3	2	---
Magnesium	ppm	ASTM D5185m		31	12	---
Calcium	ppm	ASTM D5185m		29	12	---
Phosphorus	ppm	ASTM D5185m		1385	1251	---
Zinc	ppm	ASTM D5185m		36	16	---
Sulfur	ppm	ASTM D5185m		26796	25497	---
Visc @ 40°C	cSt	ASTM D445		107.0	106	---

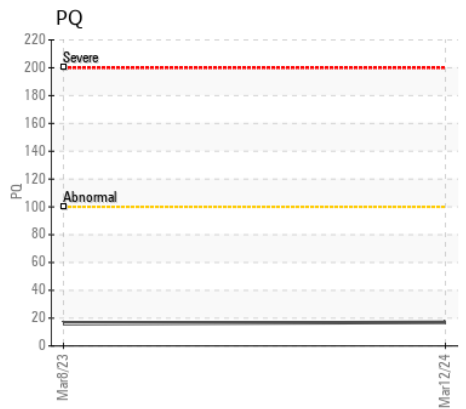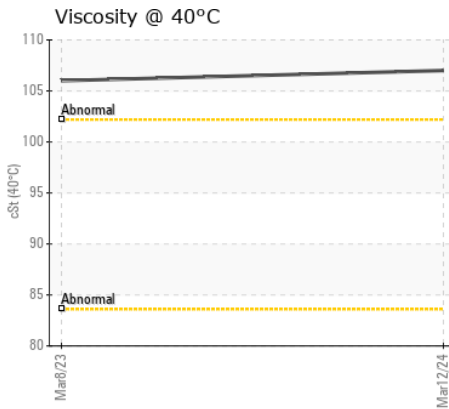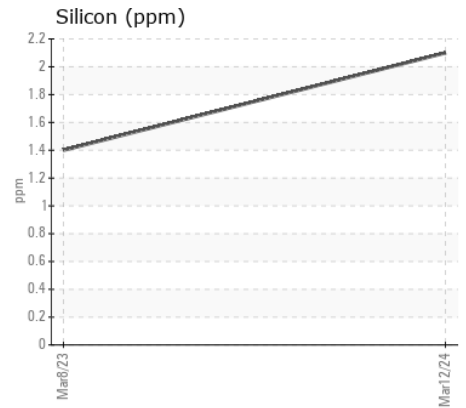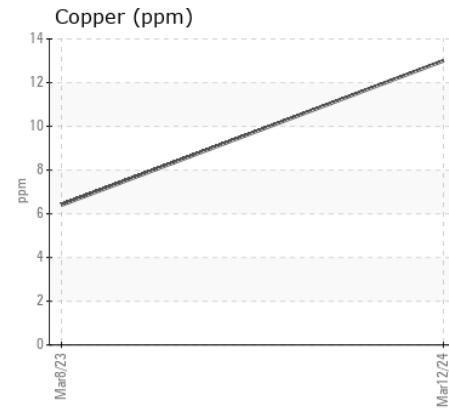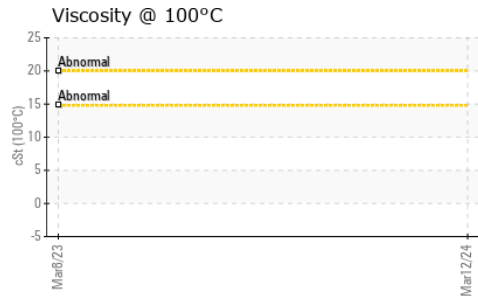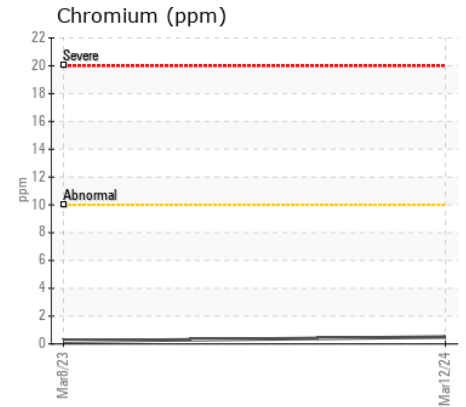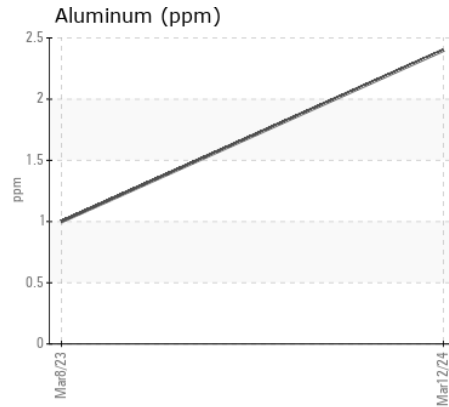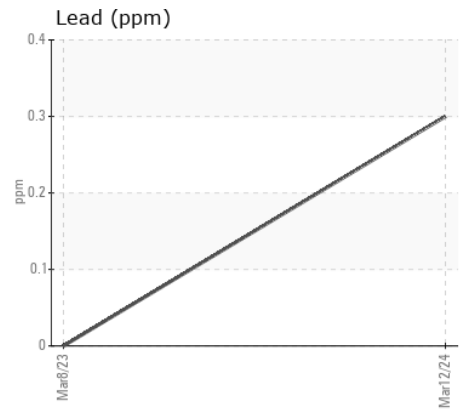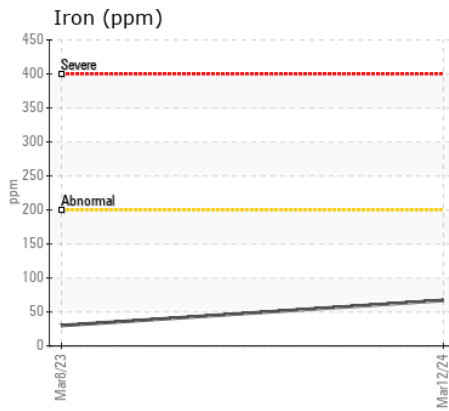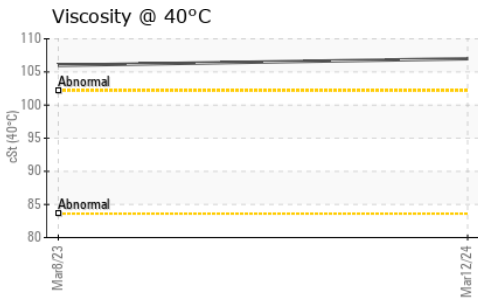

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA057349 **Received** : 18 Mar 2024
Lab Number : 06121342 **Tested** : 25 Mar 2024
Unique Number : 10930175 **Diagnosed** : 25 Mar 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FT-IR, KV100, PQ)

Suncoast Diesel Marine Inc.
 610 Mount Vernan St
 OLDSMAR, FL
 US 34677
 Contact: MARK WARREN
 oldsmar@suncoastdmi.com
 T: (813)475-5942
 F: (813)475-5943

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)