



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G 13390 (S/N 353507)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0008637	VCP412171	VCP416869
Sample Date		Client Info		20 Feb 2024	16 Nov 2023	29 Jul 2023
Machine Age	hrs	Client Info		3730	3002	2064
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	20	20	13
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>2	6	5	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	6	4	2
Lead	ppm	ASTM D5185m	>40	1	2	0
Copper	ppm	ASTM D5185m	>330	74	100	23
Tin	ppm	ASTM D5185m	>15	1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	5	4	4
Potassium	ppm	ASTM D5185m	>20	<1	0	0
Fuel	%	ASTM D3524	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.7	0.5
Nitration	Abs/cm	*ASTM D7624	>20	8.6	9.1	7.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	19.7	18.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	2	2	<1
Boron	ppm	ASTM D5185m	250	2	<1	5
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	62	56	63
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	896	953	916
Calcium	ppm	ASTM D5185m	3000	1122	1161	1163
Phosphorus	ppm	ASTM D5185m	1150	916	907	1023
Zinc	ppm	ASTM D5185m	1350	1194	1151	1250
Sulfur	ppm	ASTM D5185m	4250	2994	2686	3535
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	15.1	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.9	6.3	7.9
Visc @ 100°C	cSt	ASTM D445	10.9	11.4	11.7	11.8

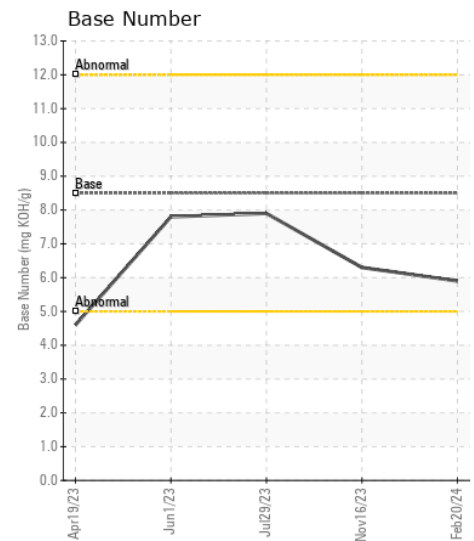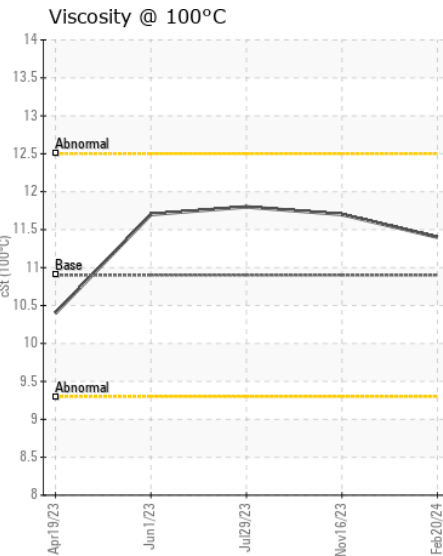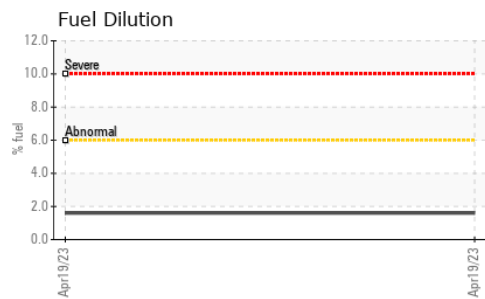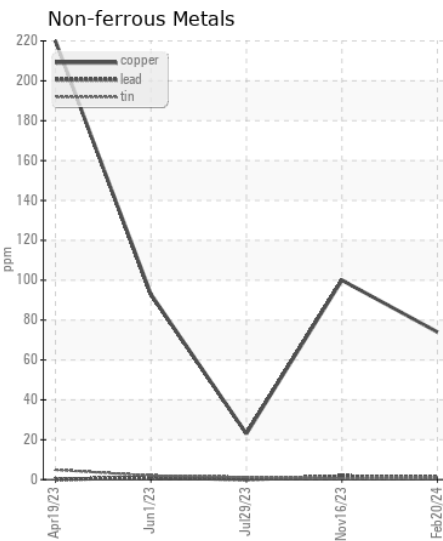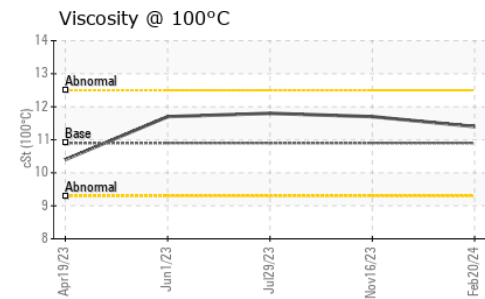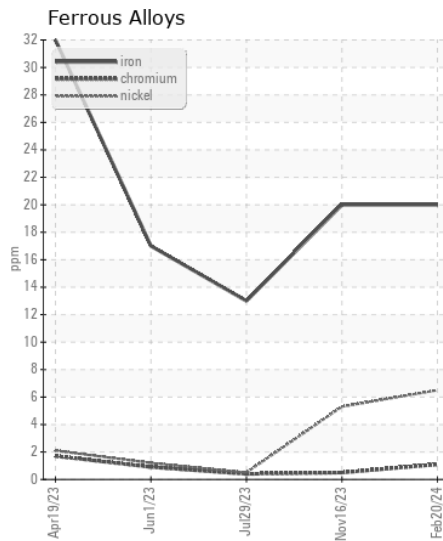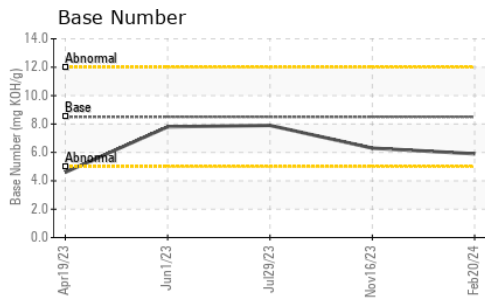

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0008637

Lab Number : 06121401

Unique Number : 10930234

Test Package : CONST (Additional Tests: FuelDilution, TBN)

Received : 18 Mar 2024

Tested : 19 Mar 2024

Diagnosed : 20 Mar 2024 - Don Baldrige

117 - ASCENDUM MACHINERY INC - GREENVILLE

2002 N GREENE ST

GREENVILLE, NC

US 27834

Contact: ALLEN WILLIAMS

allen.williams@ascendummachinery.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (704)494-8197