



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Walgreens - Yard Horse
 Machine Id
[Walgreens - Yard Horse] 136A83002
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0103656	PCA0103627	PCA0103684
Sample Date		Client Info		05 Mar 2024	12 Jan 2024	30 Nov 2023
Machine Age	mls	Client Info		5583	4232	3418
Oil Age	mls	Client Info		1351	814	2121
Filter Age	mls	Client Info		1351	814	2121
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	33	21	56
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		17	<1	2
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	1	2
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	<1	<1	2
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	4	8
Potassium	ppm	ASTM D5185m	>20	4	2	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.2	0.8	1.3
Nitration	Abs/cm	*ASTM D7624	>20	9.4	7.5	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	18.3	19.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	0
Boron	ppm	ASTM D5185m	2	34	13	10
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	43	49	36
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	950	723	733	635
Calcium	ppm	ASTM D5185m	1050	1460	1230	1566
Phosphorus	ppm	ASTM D5185m	995	1056	948	1013
Zinc	ppm	ASTM D5185m	1180	1243	1123	1132
Sulfur	ppm	ASTM D5185m	2600	3715	2922	3589
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	13.5	13.4
Base Number (BN)	mg KOH/g	ASTM D2896		7.2	8.5	7.1
Visc @ 100°C	cSt	ASTM D445	12.00	11.4	11.6	11.5

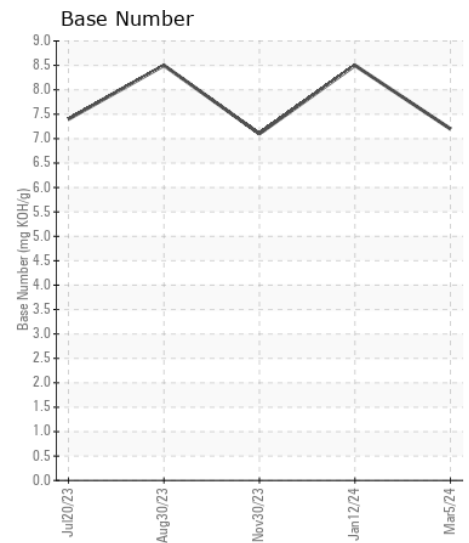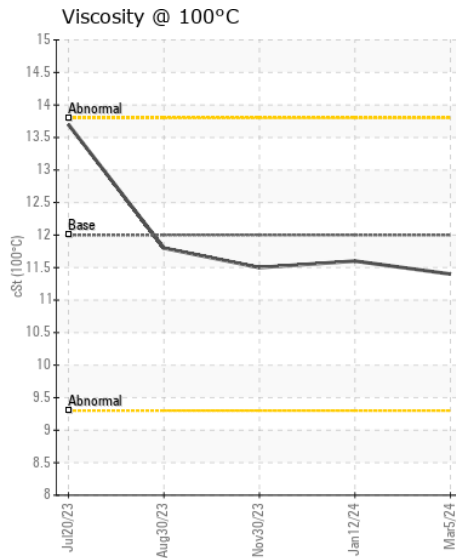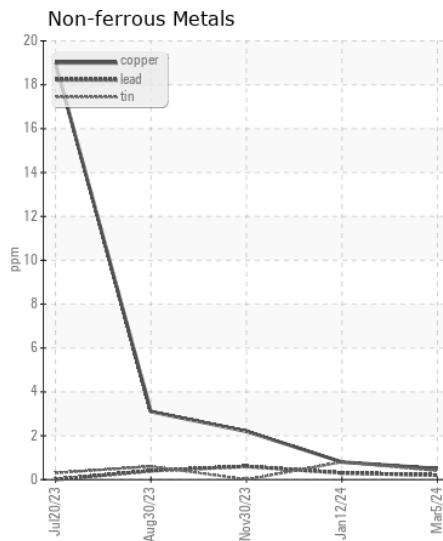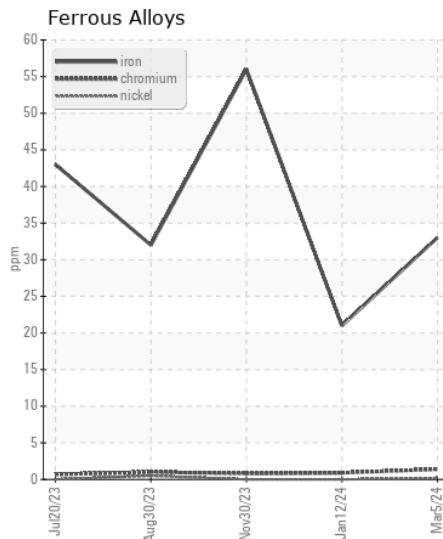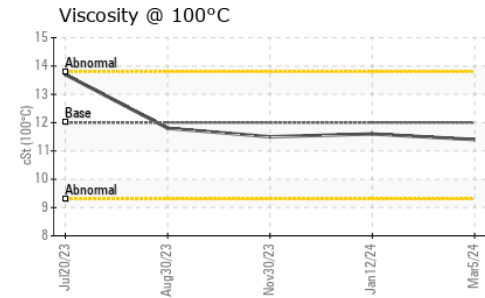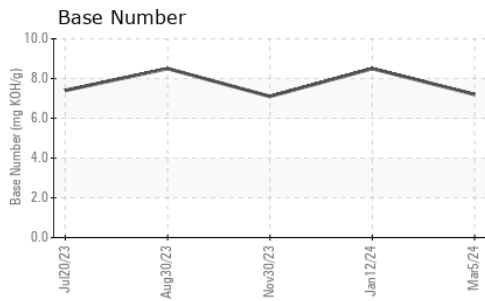

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0103656
 Lab Number : 06121410
 Unique Number : 10930243
 Test Package : FLEET

Received : 18 Mar 2024
 Tested : 19 Mar 2024
 Diagnosed : 19 Mar 2024 - Wes Davis

Transervice - Shop 1365 - Berkeley-Nazareth
 6813 Chrisphalt Drive
 Bath Borough, PA
 US 18014
 Contact: Stephen Mackes
 smackes@transervice.com
 T: (610)837-8103
 F: (610)837-8105

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)