



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id

99

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 40 (8)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005216	CL0004850	CL0004470
Sample Date		Client Info		10 Mar 2024	29 Oct 2023	09 Jul 2023
Machine Age	mls	Client Info		193980	181303	170516
Oil Age	mls	Client Info		193980	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	8	7	11
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	<1	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>30	7	6	7
Lead	ppm	ASTM D5185m	>30	<1	1	0
Copper	ppm	ASTM D5185m	>150	<1	0	1
Tin	ppm	ASTM D5185m	>5	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	5	4	4
Potassium	ppm	ASTM D5185m	>20	3	4	5
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.0	10.3	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.1	19.4	21.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	2	2	0
Boron	ppm	ASTM D5185m	250	41	37	35
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	100	85	95
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	450	17	19	18
Calcium	ppm	ASTM D5185m	3000	2422	2102	2334
Phosphorus	ppm	ASTM D5185m	1150	1135	1021	1068
Zinc	ppm	ASTM D5185m	1350	1288	1176	1266
Sulfur	ppm	ASTM D5185m	4250	4188	3446	4100
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.8	15.9	17.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.1	4.7	7.0
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	13.8	13.6

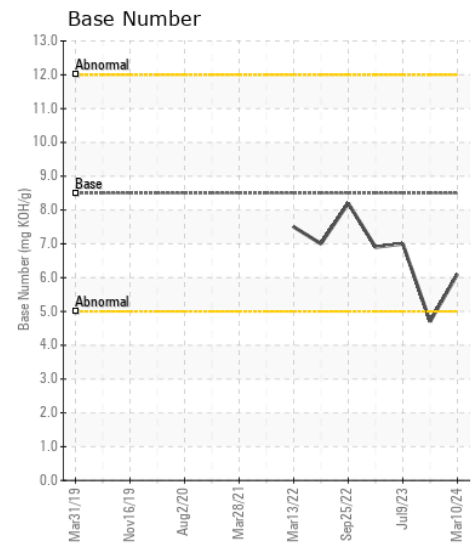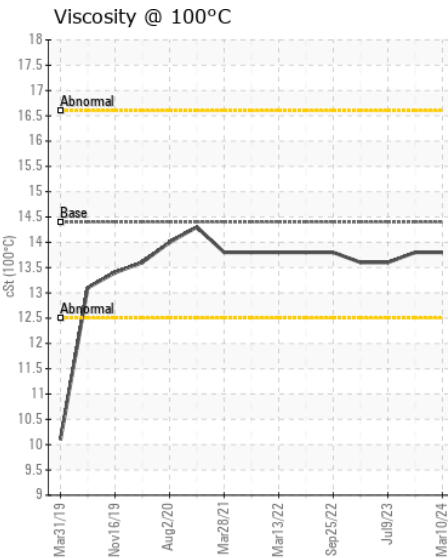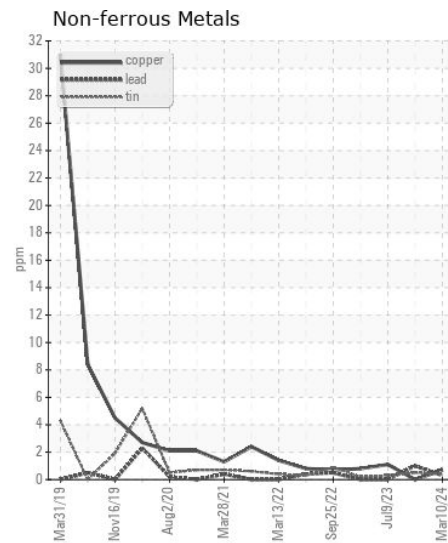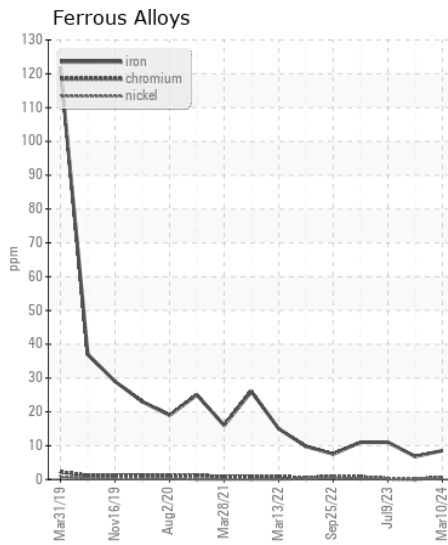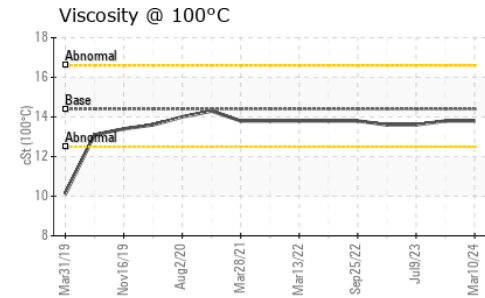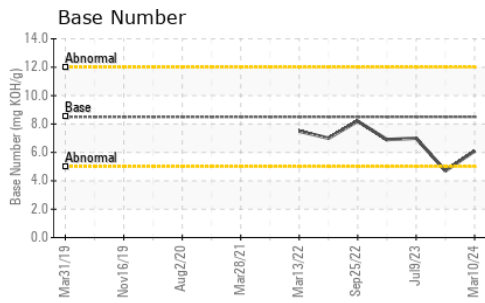

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : CL0005216 Received : 18 Mar 2024
 Lab Number : 06121458 Tested : 19 Mar 2024
 Unique Number : 10930291 Diagnosed : 19 Mar 2024 - Wes Davis
 Test Package : CONST (Additional Tests: TBN)

RACE CITY STEEL
 4052 N HWY 16
 DENVER, NC
 US 28037
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: