



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**MODULE UPPER LINE 8 LMU 4**  
 Component  
**Upper Gearbox**  
 Fluid  
**MOBIL SHC 629 (6 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

## WEAR

All component wear rates are normal.







## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0903701</b>	WC0601185	WC0551635
Sample Date		Client Info		<b>14 Mar 2024</b>	09 Aug 2021	08 Mar 2021
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL
PQ		ASTM D8184		<b>15</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>0</b>	6	0
Chromium	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>100	<b>50</b>	49	3
Copper	ppm	ASTM D5185m	>200	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>25	<b>2</b>	2	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185m	>50	<b>2</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Water	%	ASTM D6304	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	VLITE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	3
Boron	ppm	ASTM D5185m		<b>0</b>	0	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Phosphorus	ppm	ASTM D5185m		<b>290</b>	282	314
Zinc	ppm	ASTM D5185m		<b>23</b>	45	2
Sulfur	ppm	ASTM D5185m		<b>125</b>	91	46
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.31</b>	0.312	0.323
Visc @ 40°C	cSt	ASTM D445	142.8	<b>163</b>	165	153

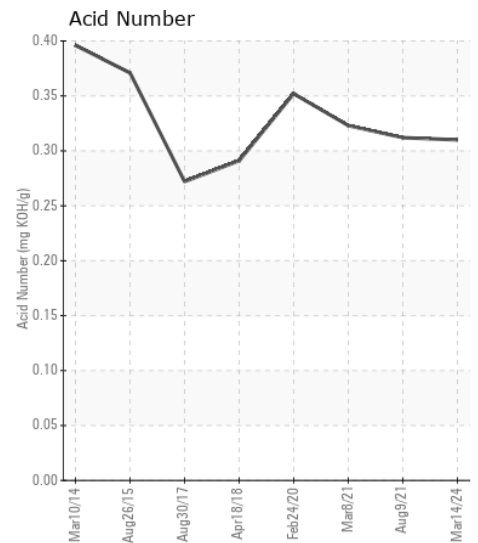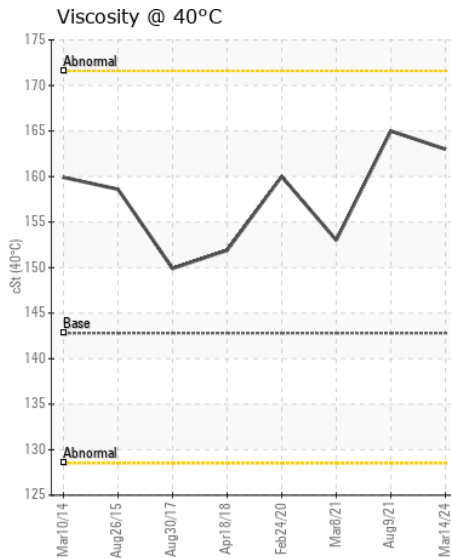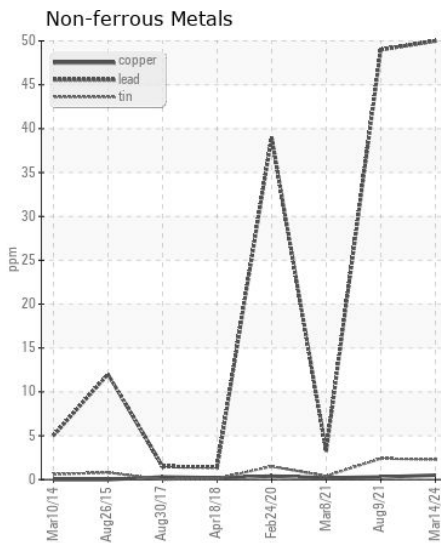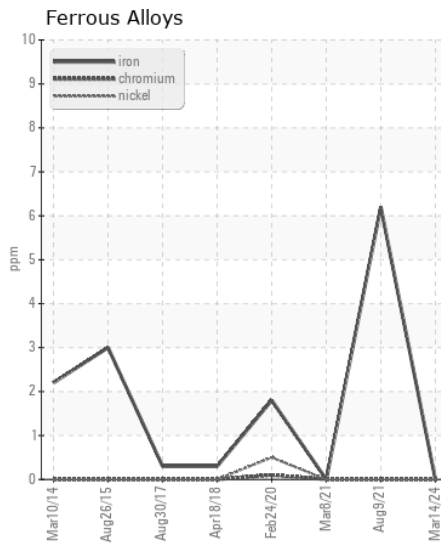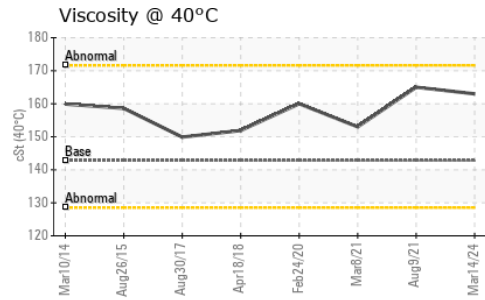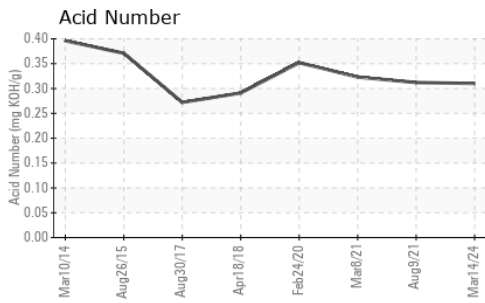

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0903701

Lab Number : 06121653

Unique Number : 10930486

Test Package : PLANT

Received : 18 Mar 2024

Tested : 21 Mar 2024

Diagnosed : 21 Mar 2024 - Jonathan Hester

PROPEX RINGGOLD PLANT

428 ROLLINS INDUSTRIAL BLVD

RINGGOLD, GA

US 30736

Contact: MITCH HELTON

MITCH.HELTON@PROPEXGLOBAL.COM

T: (423)553-3723

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)