



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / BCS - MILL CREEK [66781]
Machine Id
TTT008
Component
Rear Left Final Drive
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: PM-1 sampled fluid)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0108980	PCA0086697	PCA46228012
Sample Date		Client Info		11 Mar 2024	02 Feb 2023	05 Dec 2019
Machine Age	hrs	Client Info		7033	6859	6341
Oil Age	hrs	Client Info		7033	6859	0
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	33	43	36
Chromium	ppm	ASTM D5185m	>10	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m	>15	<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	4	1	1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	<1	3	0
Tin	ppm	ASTM D5185m	>8	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	33	9	7
Potassium	ppm	ASTM D5185m	>20	3	2	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	1
Boron	ppm	ASTM D5185m	2	0	0	4
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	2
Manganese	ppm	ASTM D5185m	0	<1	<1	0
Magnesium	ppm	ASTM D5185m	9	15	14	37
Calcium	ppm	ASTM D5185m	3114	2931	3015	2359
Phosphorus	ppm	ASTM D5185m	1099	1056	1013	971
Zinc	ppm	ASTM D5185m	1245	1259	1210	937
Sulfur	ppm	ASTM D5185m	7086	5734	7882	---
Visc @ 40°C	cSt	ASTM D445	213.9	185	179	---

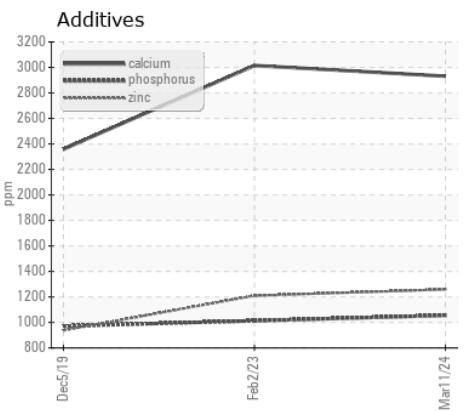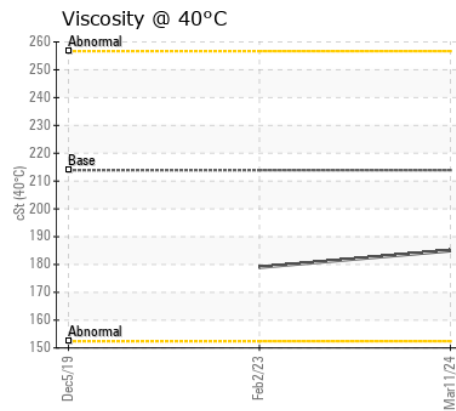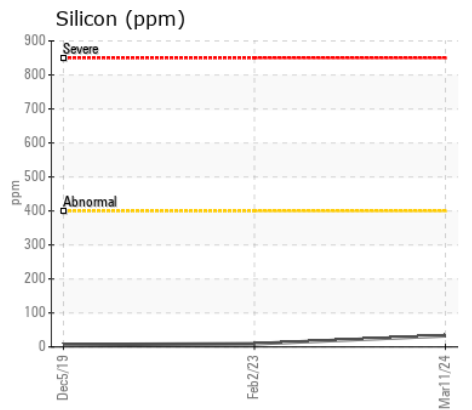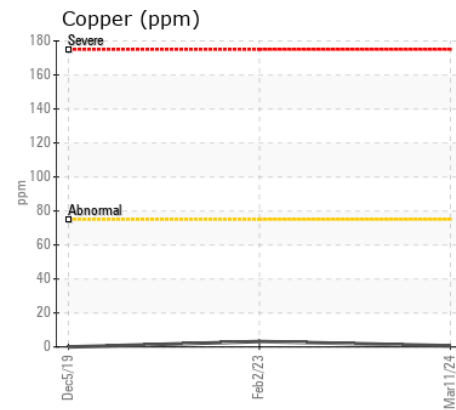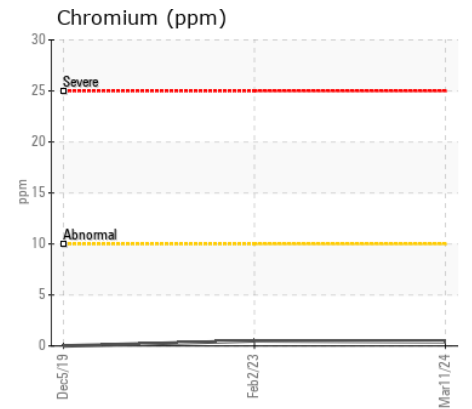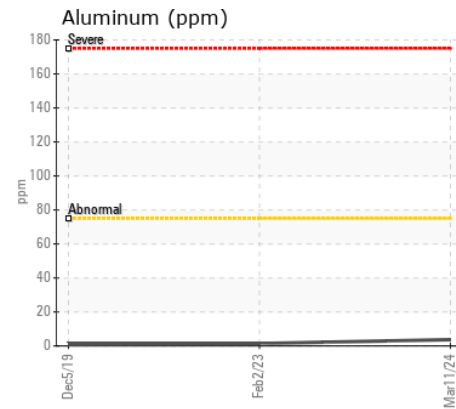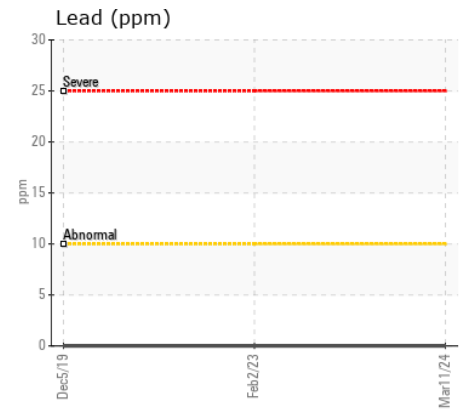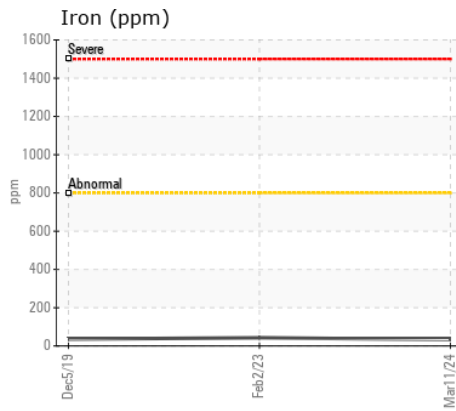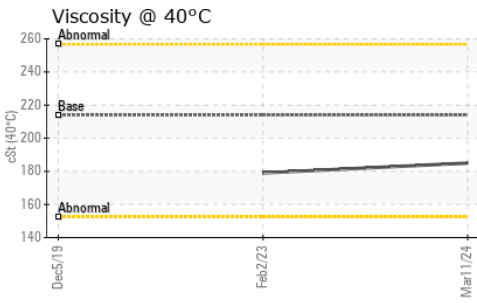

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : PCA0108980

Lab Number : 06121838

Unique Number : 10935989

Test Package : MOB 1

Received : 18 Mar 2024

Tested : 19 Mar 2024

Diagnosed : 21 Mar 2024 - Jonathan Hester

Kemp Quarries - BCS-Mill Creek

609 Lazy E Rd

Noel, MO

US 64854

Contact: TRAVIS ELLIS

tellis@kempquarries.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)