



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
KEMP QUARRIES / PRYOR STONE [64441]
Machine Id
WL103
Component
Hydraulic System
Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Pm4 performed. All oil samples taken. Engine oil, transmission oil, and all filters changed.)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0086592	PCA0084385	PCA0070285
Sample Date		Client Info		23 Feb 2024	02 Dec 2023	05 Dec 2022
Machine Age	hrs	Client Info		40226	39780	39249
Oil Age	hrs	Client Info		977	531	2150
Filter Age	hrs	Client Info		977	531	554
Oil Changed		Client Info		Oil Added	Oil Added	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>26	5	4	7
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>11	2	1	2
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>31	1	1	2
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>21	5	2	5
Potassium	ppm	ASTM D5185m	>20	2	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	2
Boron	ppm	ASTM D5185m	0	2	<1	7
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	1	1	3
Manganese	ppm	ASTM D5185m	0	0	0	<1
Magnesium	ppm	ASTM D5185m	0	15	15	32
Calcium	ppm	ASTM D5185m	50	232	187	280
Phosphorus	ppm	ASTM D5185m	330	370	389	396
Zinc	ppm	ASTM D5185m	430	484	485	468
Sulfur	ppm	ASTM D5185m	760	1048	1104	1292
Visc @ 40°C	cSt	ASTM D445	67.4	66.8	66.7	66.4

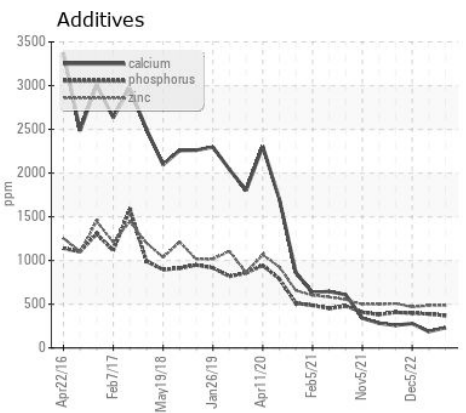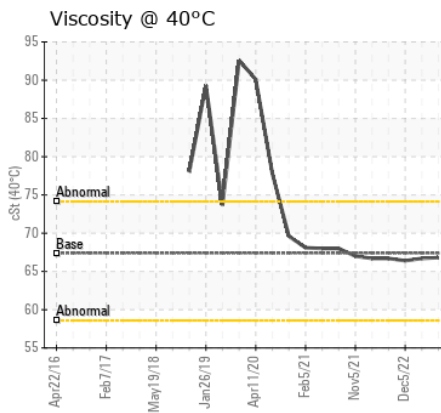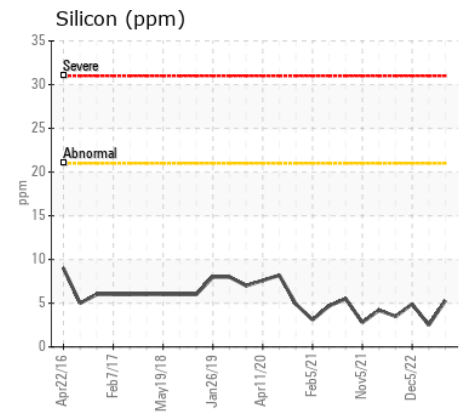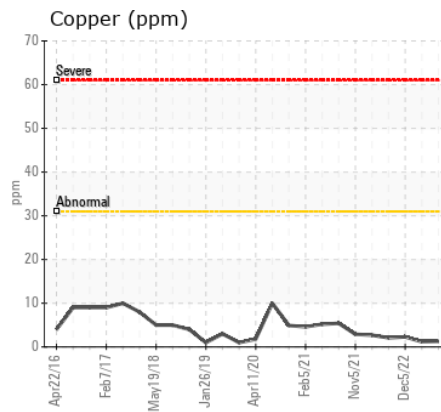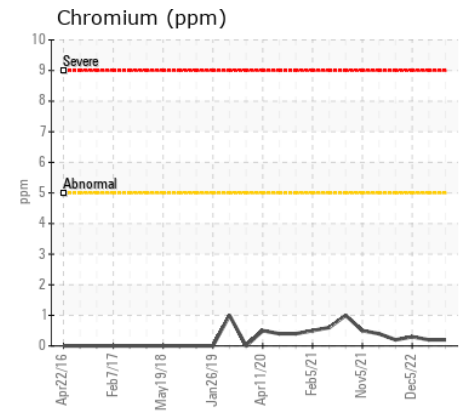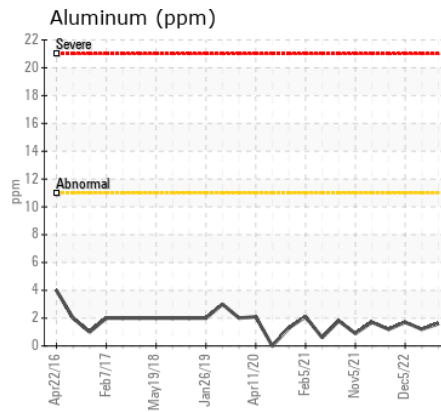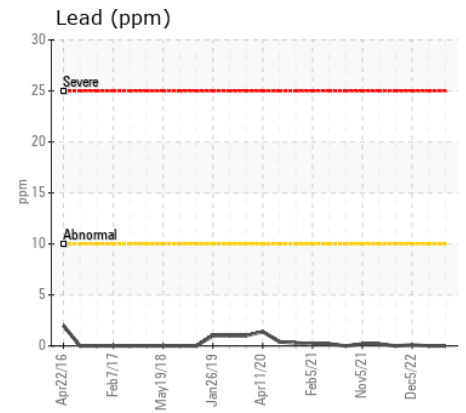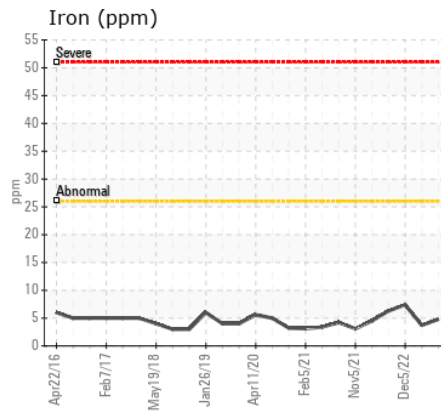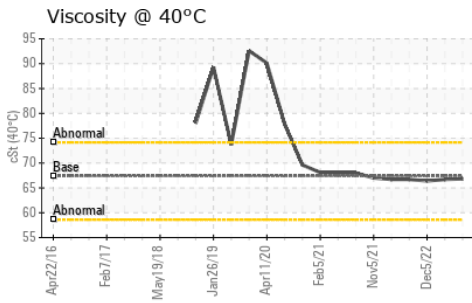

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086592
Lab Number : 06121864
Unique Number : 10936015
Test Package : MOB 1

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)