



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD 846-4423

Component
Gasoline Engine

Fluid
MOTORCRAFT FULL SYNTHETIC SAE 5W30 (8 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019439	RPL0015572	RPL0012000
Sample Date		Client Info		11 Mar 2024	19 Sep 2023	28 Mar 2023
Machine Age	mls	Client Info		87623	76848	69536
Oil Age	mls	Client Info		10775	7847	69536
Filter Age	mls	Client Info		10775	7847	0
Oil Changed		Client Info		Not Changd	Changed	Changed
Filter Changed		Client Info		Not Changd	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	21	11	11
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	5	<1	2
Lead	ppm	ASTM D5185m	>50	<1	<1	0
Copper	ppm	ASTM D5185m	>155	22	10	8
Tin	ppm	ASTM D5185m	>10	2	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	10	7	8
Potassium	ppm	ASTM D5185m	>20	3	4	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0
Nitration	Abs/cm	*ASTM D7624	>20	12.3	9.9	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	33.3	25.6	19.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	11	8	7
Boron	ppm	ASTM D5185m		21	44	83
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		75	72	73
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		542	556	539
Calcium	ppm	ASTM D5185m		1025	1046	993
Phosphorus	ppm	ASTM D5185m		698	698	678
Zinc	ppm	ASTM D5185m		862	864	844
Sulfur	ppm	ASTM D5185m		3043	3849	3189
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.7	15.3	11.7
Base Number (BN)	mg KOH/g	ASTM D2896		4.3	4.8	3.6
Visc @ 100°C	cSt	ASTM D445		10.1	9.7	9.3

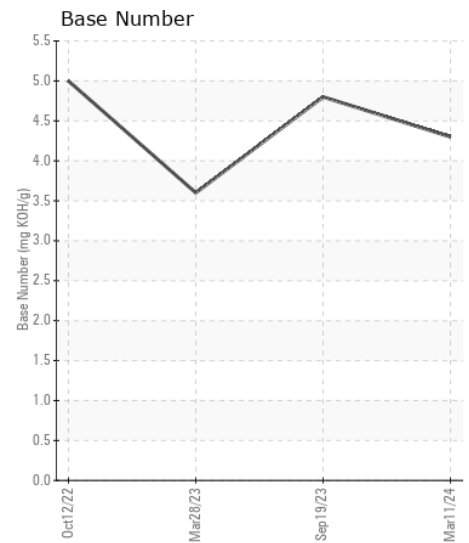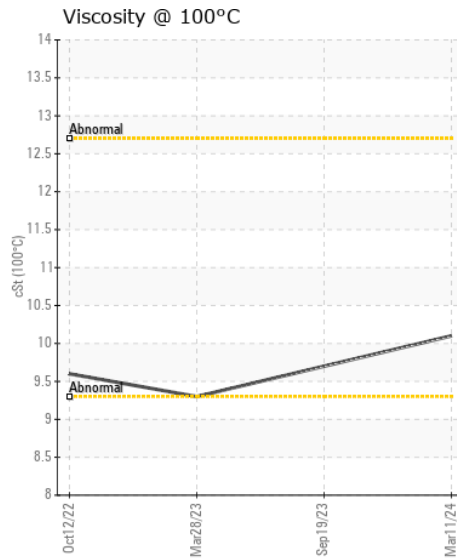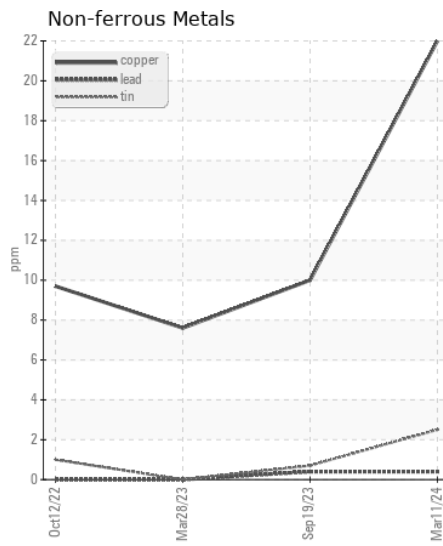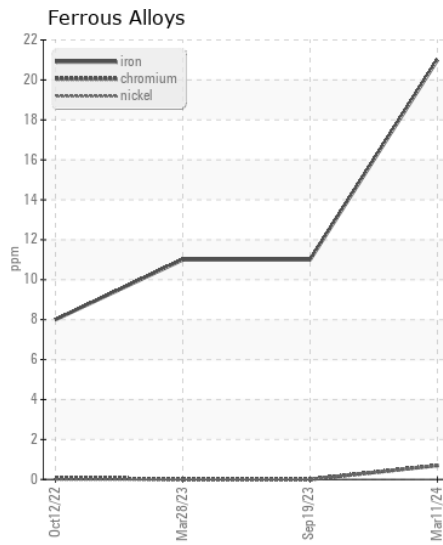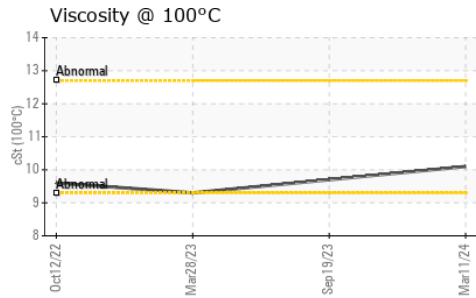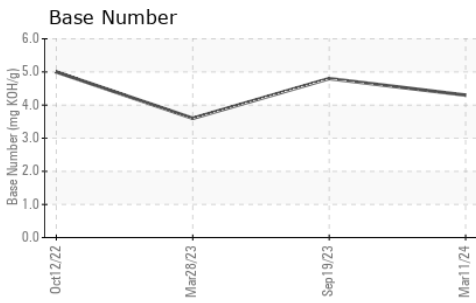

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0019439

Lab Number : 06121946

Unique Number : 10936097

Test Package : FLEET

Received : 19 Mar 2024

Tested : 19 Mar 2024

Diagnosed : 21 Mar 2024 - Jonathan Hester

RTL PACLEASE - 7006 - Pico Rivera

7837 Telegraph Rd

Pico Rivera, CA

US 90660

Contact: GERARDO CARROLA

carrolag@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: