



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**HINO 846-4631**  
 Component  
**Diesel Engine**  
 Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0017974</b>	RPL0016832	RPL0015028
Sample Date		Client Info		<b>26 Feb 2024</b>	09 Dec 2023	09 Sep 2023
Machine Age	mls	Client Info		<b>148856</b>	0	124432
Oil Age	mls	Client Info		<b>24424</b>	0	0
Filter Age	mls	Client Info		<b>24424</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	Not Changd
Filter Changed		Client Info		<b>Changed</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	MARGINAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>36</b>	9	11
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	2	<1
Lead	ppm	ASTM D5185m	>40	<b>11</b>	2	2
Copper	ppm	ASTM D5185m	>330	<b>4</b>	1	<1
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>7</b>	1	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	▲ 3.4	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>1</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>13.8</b>	10.0	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>28.6</b>	21.7	20.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	4
Boron	ppm	ASTM D5185m	0	<b>5</b>	1	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>70</b>	62	63
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	0	<b>1013</b>	● 999	1079
Calcium	ppm	ASTM D5185m		<b>1156</b>	● 1070	1221
Phosphorus	ppm	ASTM D5185m		<b>1058</b>	1031	1152
Zinc	ppm	ASTM D5185m		<b>1320</b>	● 1329	1430
Sulfur	ppm	ASTM D5185m		<b>3128</b>	3103	4308
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>30.2</b>	20.1	18.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>5.7</b>	7.4	7.8
Visc @ 100°C	cSt	ASTM D445	14	<b>12.5</b>	12.0	12.7

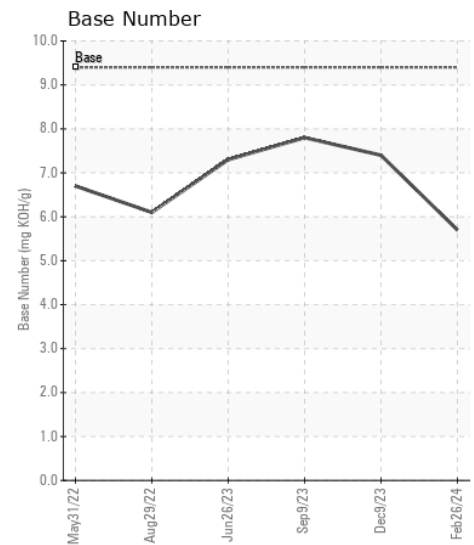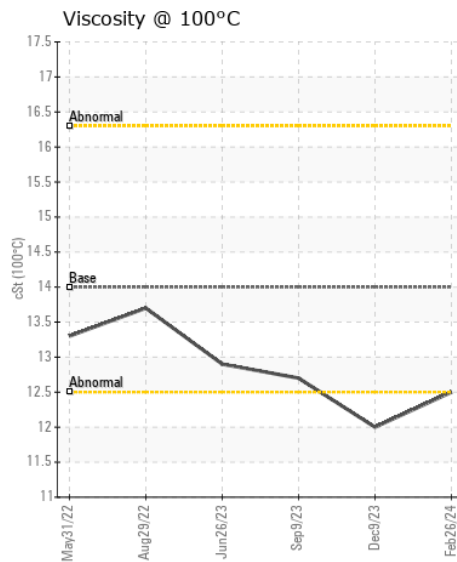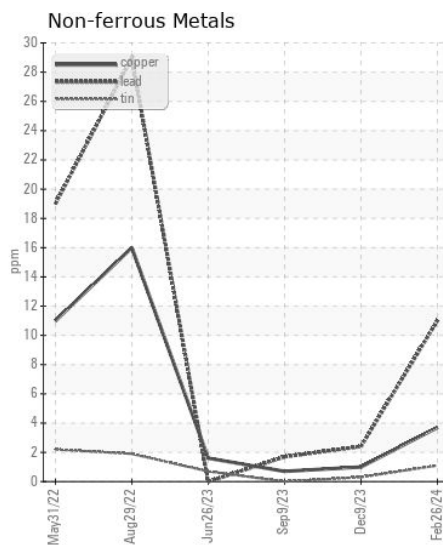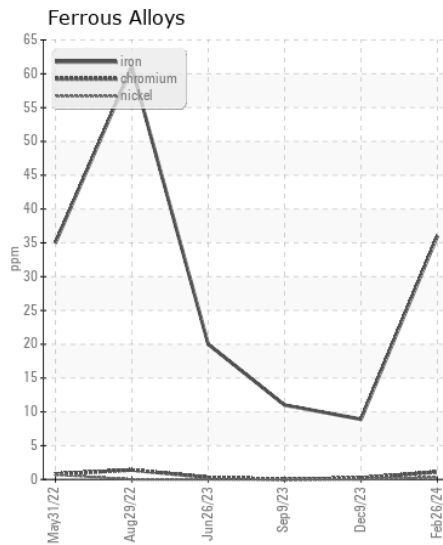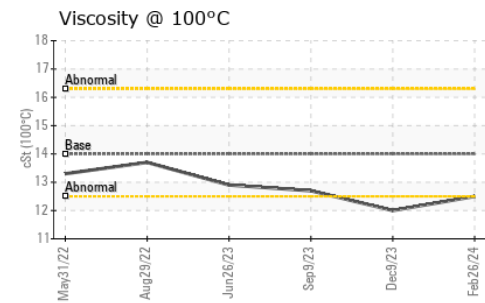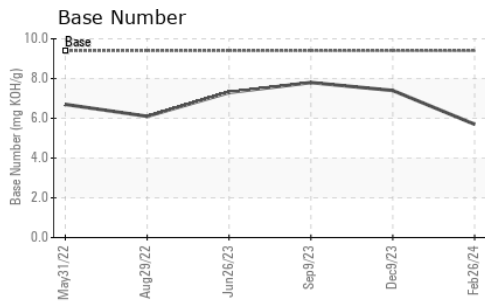

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0017974  
**Lab Number** : 06121970  
**Unique Number** : 10936121  
**Test Package** : FLEET

**Received** : 19 Mar 2024  
**Tested** : 19 Mar 2024  
**Diagnosed** : 21 Mar 2024 - Jonathan Hester

**RTL PACLEASE - 7006 - Pico Rivera**  
 7837 Telegraph Rd  
 Pico Rivera, CA  
 US 90660

Contact: GERARDO CARROLA  
 carrolag@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: