



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**VOLVO A60H A60H 340126**

Component  
**Diesel Engine**

Fluid  
**MOBIL 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Note that there appears to be a discrepancy in the total time on this component, when compared to the historical data.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP440703</b>	VCP452426	VCP428903
Sample Date		Client Info		<b>13 Mar 2024</b>	04 Mar 2024	03 Nov 2023
Machine Age	hrs	Client Info		<b>9320</b>	9648	9145
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>4</b>	32	12
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	19	7
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>0</b>	1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	34	7
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	2
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.4	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.0</b>	7.3	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	21.7	22.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>118	<b>3</b>	11	14
Boron	ppm	ASTM D5185m		<b>63</b>	50	41
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>40</b>	34	40
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>533</b>	416	507
Calcium	ppm	ASTM D5185m		<b>1694</b>	1429	1750
Phosphorus	ppm	ASTM D5185m		<b>966</b>	826	935
Zinc	ppm	ASTM D5185m		<b>1114</b>	852	1008
Sulfur	ppm	ASTM D5185m		<b>3592</b>	2423	2852
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.8</b>	19.6	20.1
Base Number (BN)	mg KOH/g	ASTM D2896		<b>10.5</b>	9.8	10.1
Visc @ 100°C	cSt	ASTM D445		<b>13.0</b>	12.8	13.0

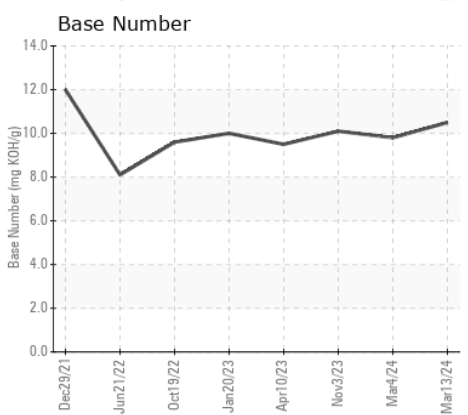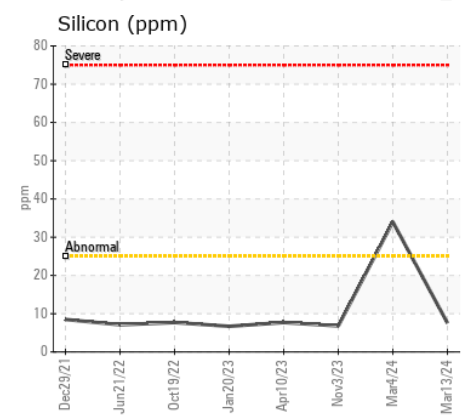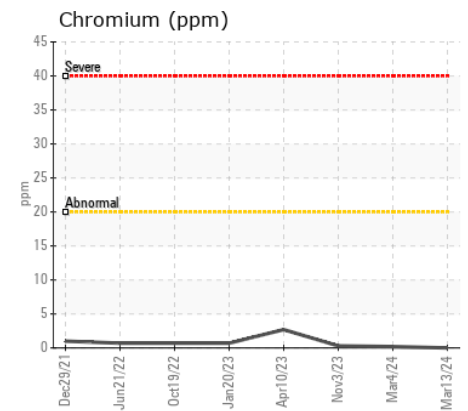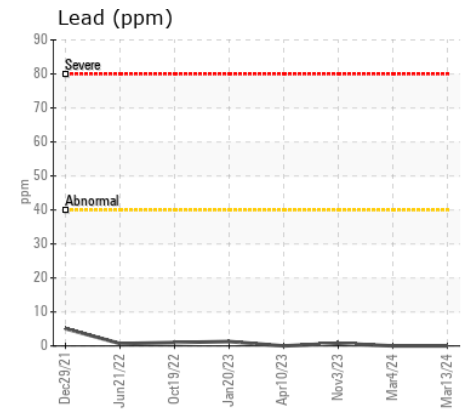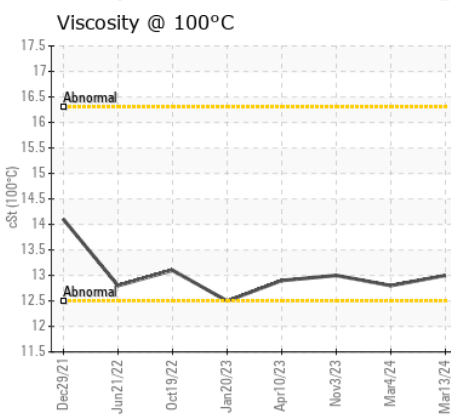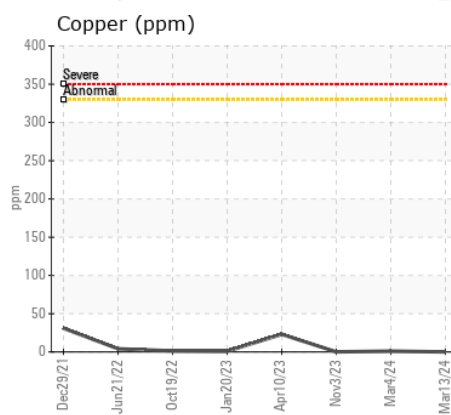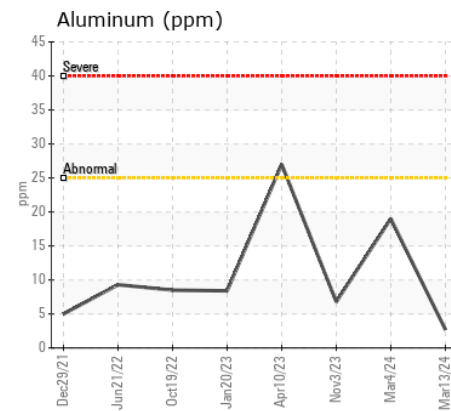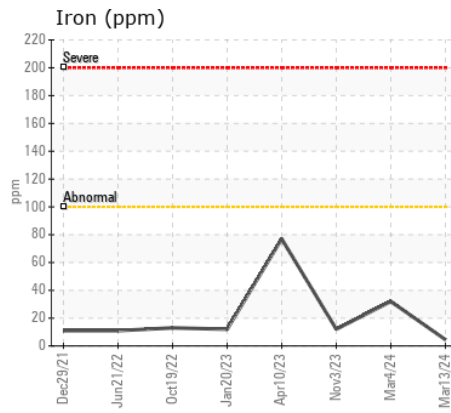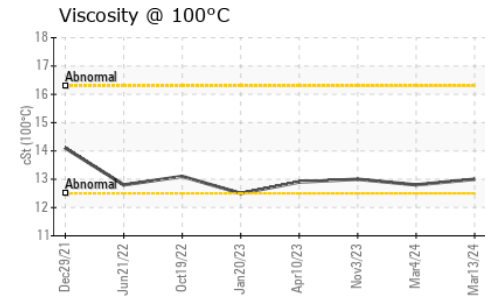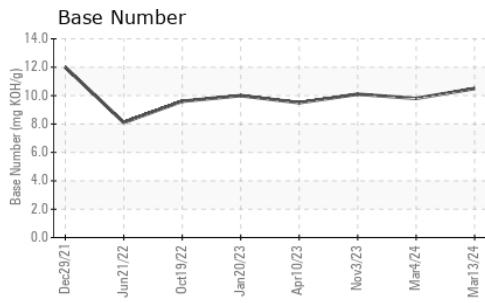

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP440703 **Received** : 19 Mar 2024  
**Lab Number** : 06122046 **Tested** : 19 Mar 2024  
**Unique Number** : 10936197 **Diagnosed** : 21 Mar 2024 - Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**SAIIA CONSTRUCTION LLC**  
 4400 LEWISBURG RD  
 BIRMINGHAM, AL  
 US 35207

Contact: STEPHANI BRITTON  
 sbritton@saiia.com; doug.bogart@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (205)943-2268  
 F: (205)943-2269