



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
149-1013
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0015199	RPL0003499	---
Sample Date		Client Info		16 Jan 2024	18 Jul 2022	---
Machine Age	mls	Client Info		226021	103499	---
Oil Age	mls	Client Info		50000	25000	---
Filter Age	mls	Client Info		50000	25000	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	27	13	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	7	9	---
Lead	ppm	ASTM D5185m	>40	<1	0	---
Copper	ppm	ASTM D5185m	>330	3	2	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	7	---
Potassium	ppm	ASTM D5185m	>20	16	16	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.8	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	10.9	10.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.2	23.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	1	---
Boron	ppm	ASTM D5185m	0	2	16	---
Barium	ppm	ASTM D5185m	0	0	2	---
Molybdenum	ppm	ASTM D5185m	0	63	55	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	0	989	873	---
Calcium	ppm	ASTM D5185m		1198	1276	---
Phosphorus	ppm	ASTM D5185m		1085	979	---
Zinc	ppm	ASTM D5185m		1332	1205	---
Sulfur	ppm	ASTM D5185m		3209	3338	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.5	19.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	6.6	9.2	---
Visc @ 100°C	cSt	ASTM D445	14	14.6	14.4	---

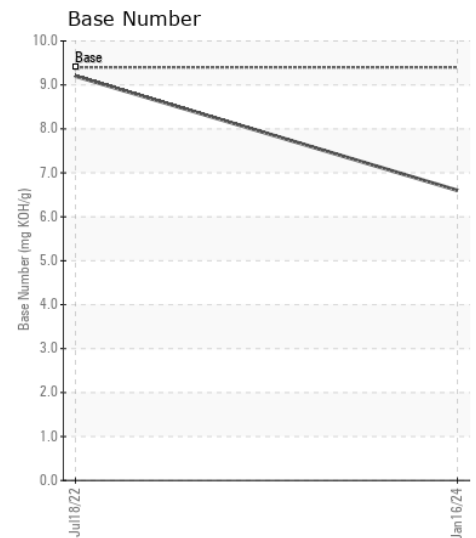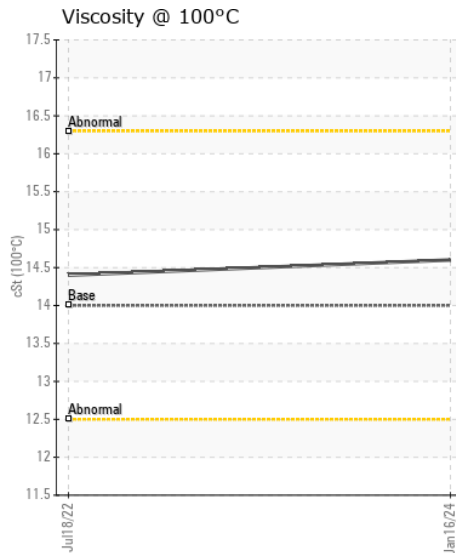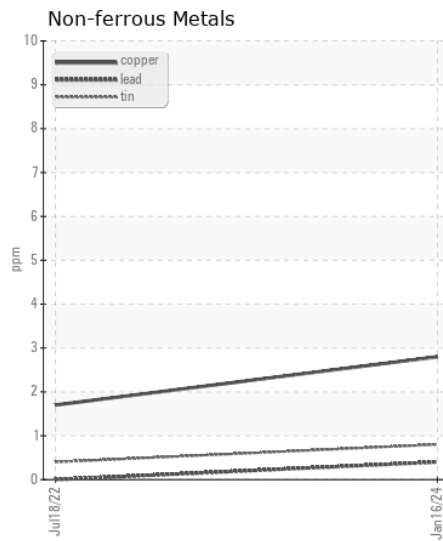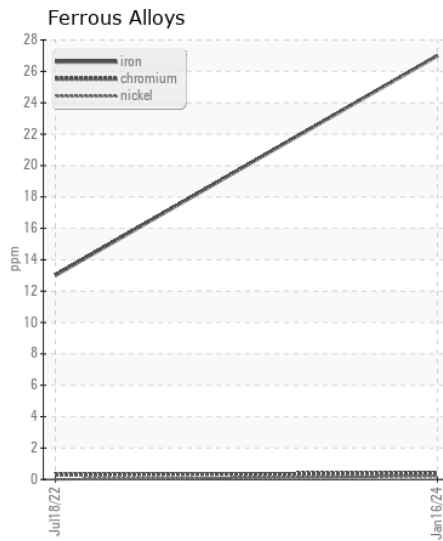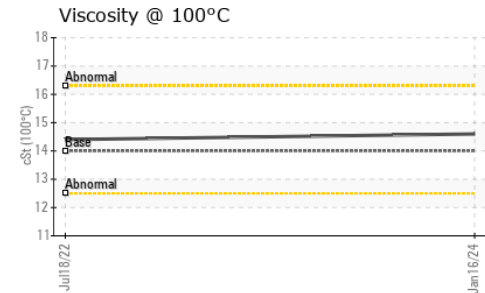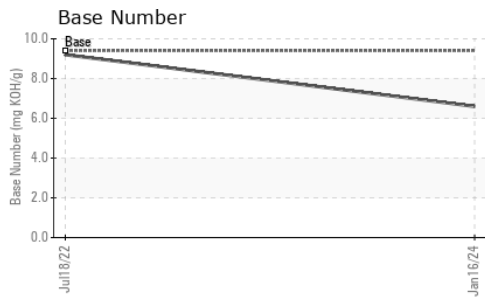

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0015199
Lab Number : 06122187
Unique Number : 10936338
Test Package : FLEET

Received : 19 Mar 2024
Tested : 20 Mar 2024
Diagnosed : 21 Mar 2024 - Angela Borella

RTL PACLEASE - 7013 - Albuquerque
 901 64th St. N.W.
 Albuquerque, NM
 US 87121

Contact: Aaron Arrey
 ArreyA@RushEnterprises.Com

T: (505)767-7404

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: