



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**S0916A-Suamico**

Machine Id  
**514030**

Component  
**Front Center Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (44 QTS)**

**RECOMMENDATION**

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0095935</b>	GFL0095949	GFL0074841
Sample Date		Client Info		<b>14 Mar 2024</b>	14 Dec 2023	05 Sep 2023
Machine Age	hrs	Client Info		<b>1764</b>	1196	599
Oil Age	hrs	Client Info		<b>568</b>	597	599
Filter Age	hrs	Client Info		<b>0</b>	597	599
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

**WEAR**

The copper level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>14</b>	14	23
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	2
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	5	9
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	4
Copper	ppm	ASTM D5185m	>30	<b>▲ 85</b>	▲ 71	▲ 331
Tin	ppm	ASTM D5185m	>15	<b>2</b>	<1	4
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>5</b>	5	10
Potassium	ppm	ASTM D5185m	>20	<b>10</b>	18	29
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	0.4
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.8</b>	8.5	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.5</b>	20.3	20.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	5
Boron	ppm	ASTM D5185m	0	<b>3</b>	6	30
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	45
Molybdenum	ppm	ASTM D5185m	60	<b>65</b>	49	43
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	3
Magnesium	ppm	ASTM D5185m	1010	<b>969</b>	780	440
Calcium	ppm	ASTM D5185m	1070	<b>1169</b>	1246	1572
Phosphorus	ppm	ASTM D5185m	1150	<b>983</b>	776	639
Zinc	ppm	ASTM D5185m	1270	<b>1283</b>	1038	821
Sulfur	ppm	ASTM D5185m	2060	<b>2614</b>	1896	2001
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.2</b>	18.5	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.3</b>	7.0	7.7
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.0</b>	12.6	● 10.3

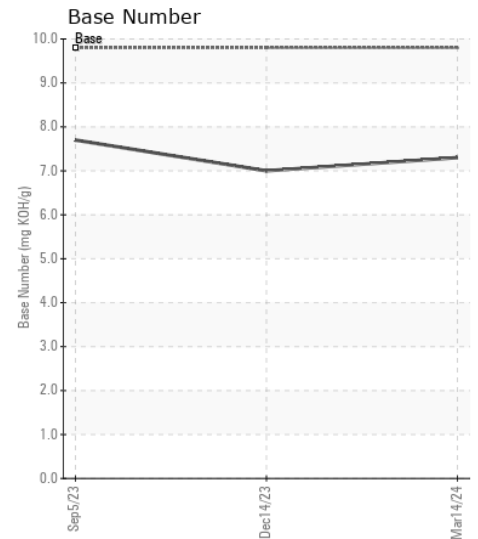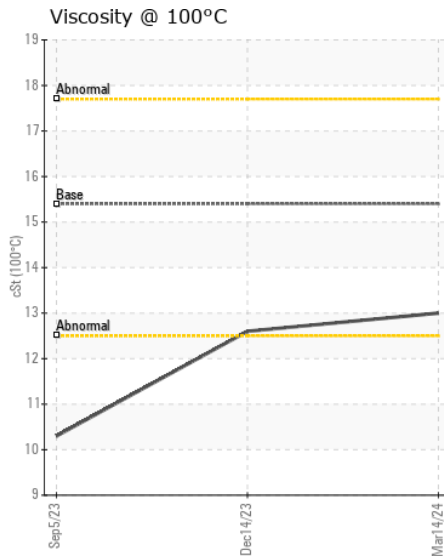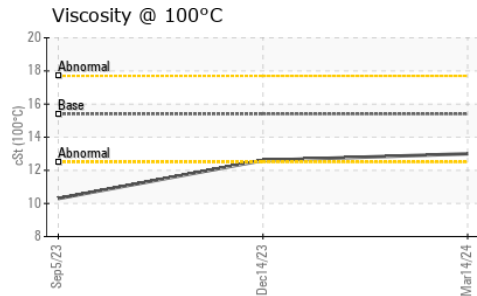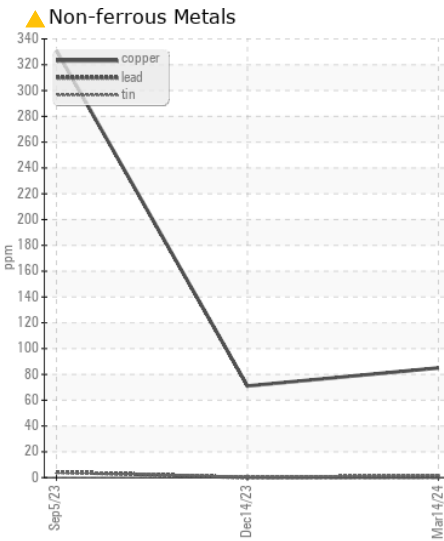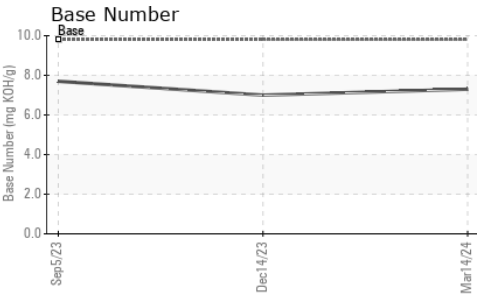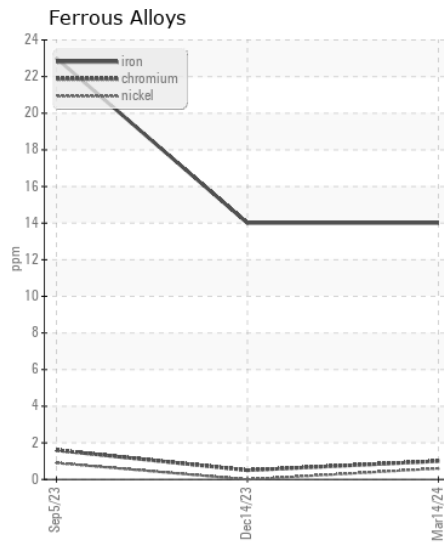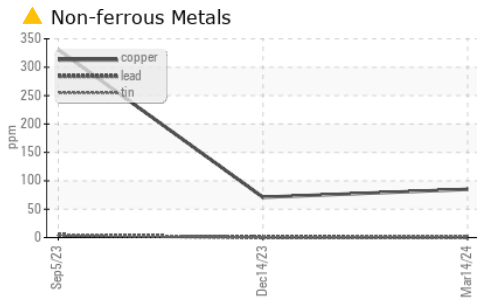

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0095935 **Received** : 19 Mar 2024  
**Lab Number** : 06122216 **Tested** : 20 Mar 2024  
**Unique Number** : 10936367 **Diagnosed** : 21 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 916A - Suamico**  
 2300 Deerfield Ave E  
 Suamico, WI  
 US 54313  
 Contact: NICHOLAS WEIDNER  
 nweidner@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: