



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L70H 623718
Component
Hydraulic System
Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP437730	VCP328938	---
Sample Date		Client Info		14 Mar 2024	28 Sep 2021	---
Machine Age	hrs	Client Info		4276	1618	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<1	2	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>20	<1	2	---
Lead	ppm	ASTM D5185m	>20	2	2	---
Copper	ppm	ASTM D5185m	>20	2	2	---
Tin	ppm	ASTM D5185m	>20	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	2	2	---
Potassium	ppm	ASTM D5185m	>20	0	0	---
Water		WC Method	>0.2	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	9321	3476	---
Particles >6µm		ASTM D7647	>1300	2621	503	---
Particles >14µm		ASTM D7647	>160	220	19	---
Particles >21µm		ASTM D7647	>40	61	4	---
Particles >38µm		ASTM D7647	>10	2	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/19/15	19/16/11	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m	14	0	1	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.0	0	<1	---
Manganese	ppm	ASTM D5185m	0.0	0	<1	---
Magnesium	ppm	ASTM D5185m	2.6	0	2	---
Calcium	ppm	ASTM D5185m	49	49	62	---
Phosphorus	ppm	ASTM D5185m	354	337	342	---
Zinc	ppm	ASTM D5185m	419	415	476	---
Sulfur	ppm	ASTM D5185m	3719	2013	1885	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.32	0.336	---
Visc @ 40°C	cSt	ASTM D445	46	48.7	47.5	---

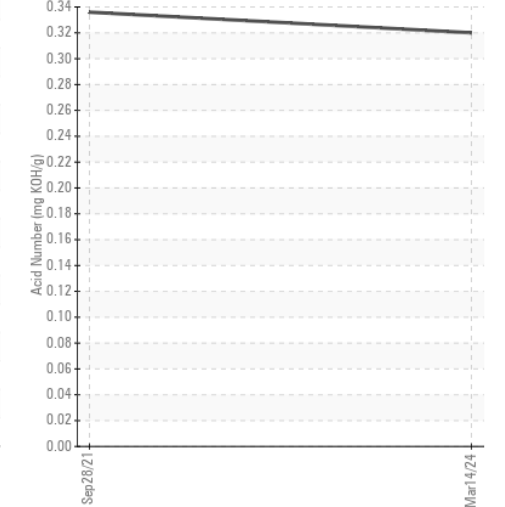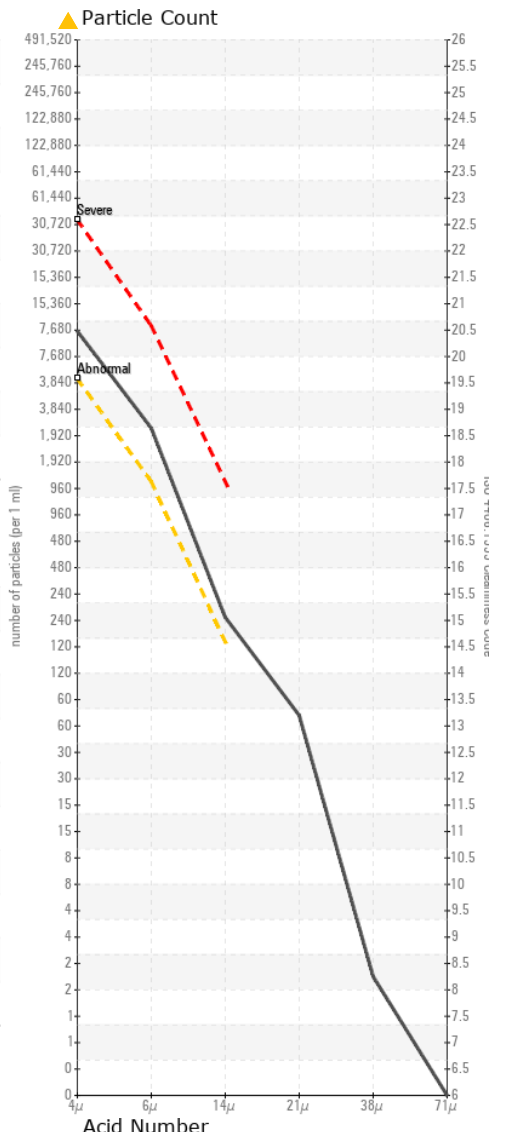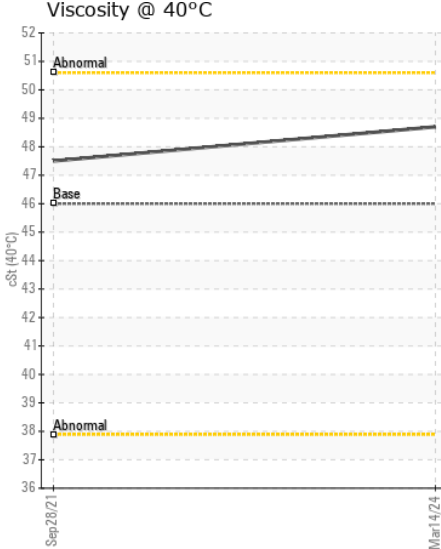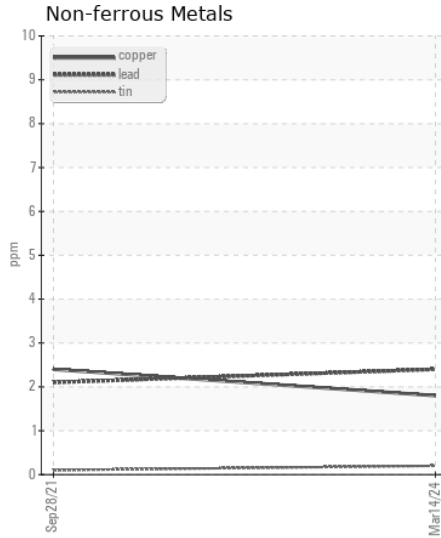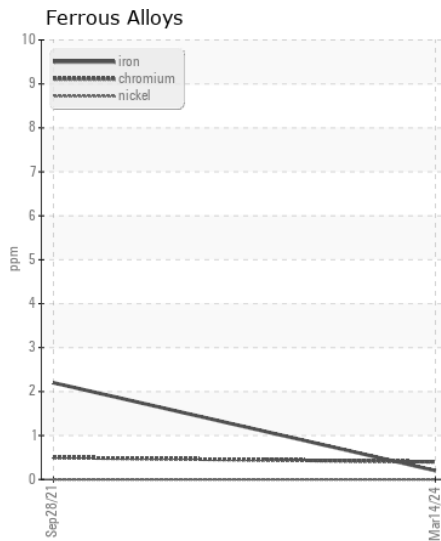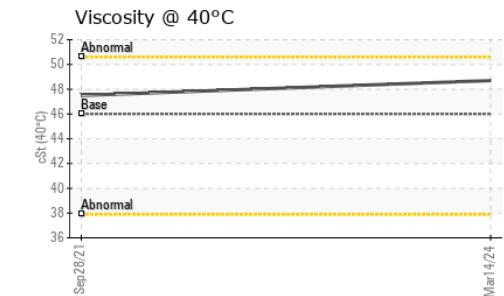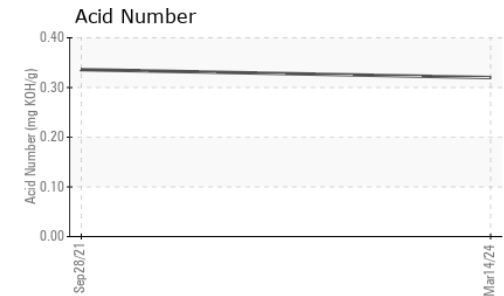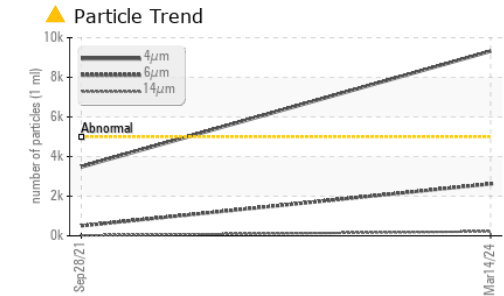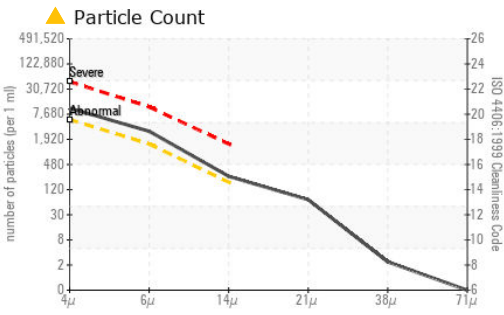

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP437730
Lab Number : 06122282
Unique Number : 10936433
Test Package : MOB 2

Received : 19 Mar 2024
Tested : 20 Mar 2024
Diagnosed : 20 Mar 2024 - Wes Davis

ALTA EQUIPMENT COMPANY
 5151 DR MARTIN LUTHER KING BLVD
 FORT MYERS, FL
 US 33905
 Contact: TODD LARK
 tlark@altaequipfl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (239)481-3302