



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 4066R 1LV4066RAKK407476

Component
Transmission (Manual)

Fluid
JOHN DEERE HY-GARD HYD/TRANS LOW VIS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0189838	---	---
Sample Date		Client Info		08 Mar 2024	---	---
Machine Age	hrs	Client Info		209	---	---
Oil Age	hrs	Client Info		209	---	---
Filter Age	hrs	Client Info		209	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	19	---	---
Iron	ppm	ASTM D5185m	>200	35	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>7	3	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>45	4	---	---
Copper	ppm	ASTM D5185m	>225	47	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	10	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		6	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		3	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		98	---	---
Calcium	ppm	ASTM D5185m		3189	---	---
Phosphorus	ppm	ASTM D5185m		950	---	---
Zinc	ppm	ASTM D5185m		1176	---	---
Sulfur	ppm	ASTM D5185m		3674	---	---
Visc @ 40°C	cSt	ASTM D445	32	30.9	---	---

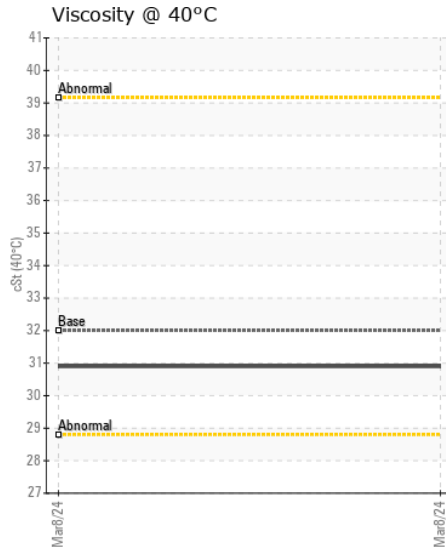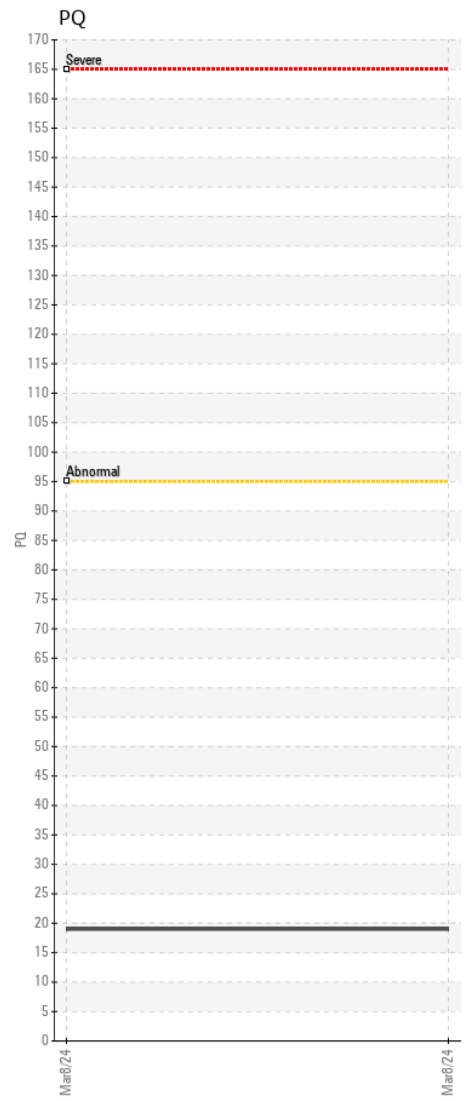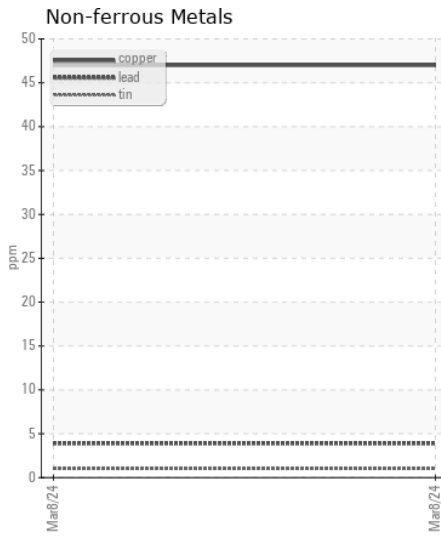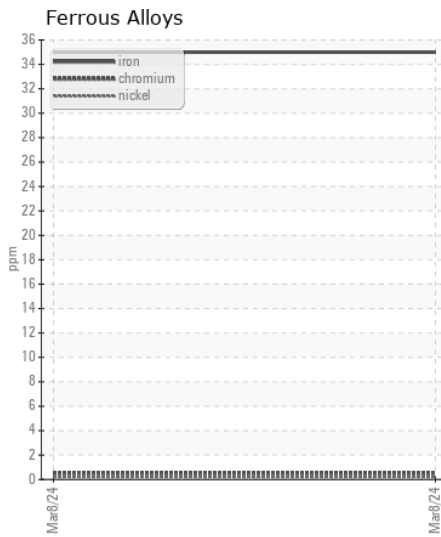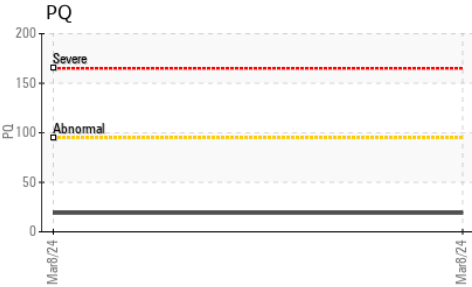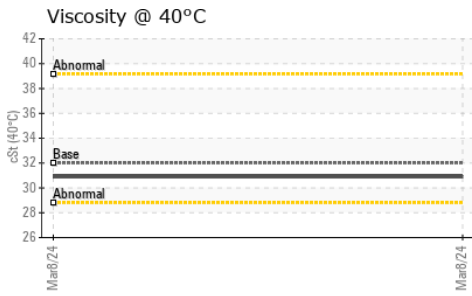

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0189838 **Received** : 19 Mar 2024
Lab Number : 06122635 **Tested** : 20 Mar 2024
Unique Number : 10936786 **Diagnosed** : 20 Mar 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - LA CROSSE
 38431 HWY 58
 LA CROSSE, VA
 US 23950-1807

Contact: HUNTER GREEN
 hgreen@jamesriverequipment.com
 T: (434)447-4325
 F: (434)447-1329

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)