



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 350G 1FF350GXCEE809809**

Component  
**Swing Drive**

Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0203487</b>	JR0188527	JR0162413
Sample Date		Client Info		<b>14 Mar 2024</b>	11 Dec 2023	13 Apr 2023
Machine Age	hrs	Client Info		<b>11093</b>	10617	9936
Oil Age	hrs	Client Info		<b>10412</b>	681	500
Filter Age	hrs	Client Info		<b>0</b>	0	500
Oil Changed		Client Info		<b>Changed</b>	Not Chngd	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>13</b>	15	10
Iron	ppm	ASTM D5185m	>151	<b>&lt;1</b>	2	3
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>21	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m	>51	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>51	<b>0</b>	0	0
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>31	<b>2</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m	>51	<b>0</b>	0	0
Boron	ppm	ASTM D5185m		<b>1</b>	4	22
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>7</b>	2	2
Calcium	ppm	ASTM D5185m		<b>78</b>	55	19
Phosphorus	ppm	ASTM D5185m		<b>294</b>	364	476
Zinc	ppm	ASTM D5185m		<b>16</b>	8	5
Sulfur	ppm	ASTM D5185m		<b>19774</b>	18568	19624
Visc @ 40°C	cSt	ASTM D445		<b>145</b>	140	142


Viscosity @ 40°C

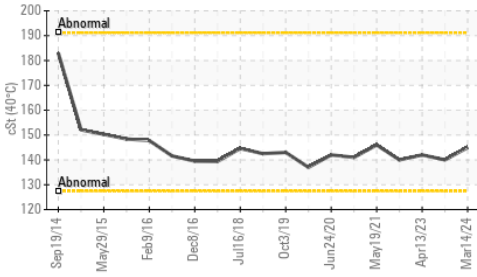


PQ

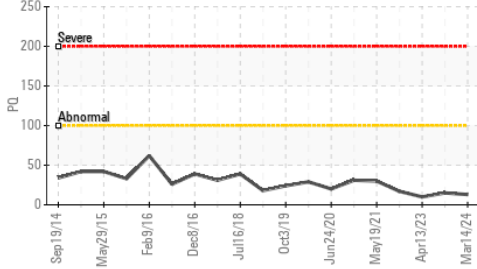


Ferrous Alloys

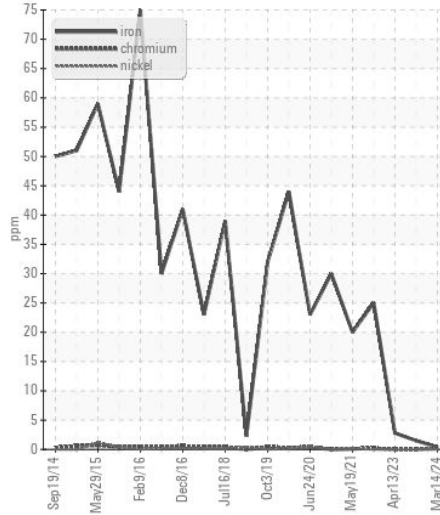


Non-ferrous Metals

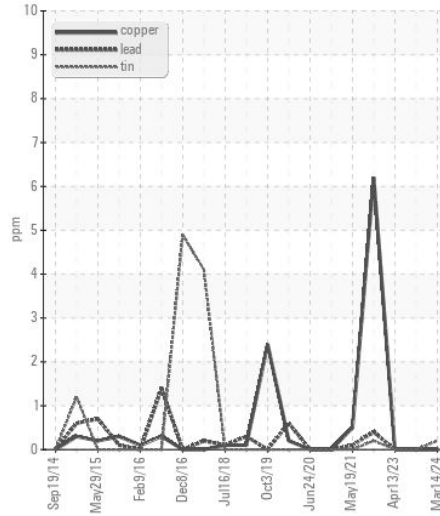

PQ

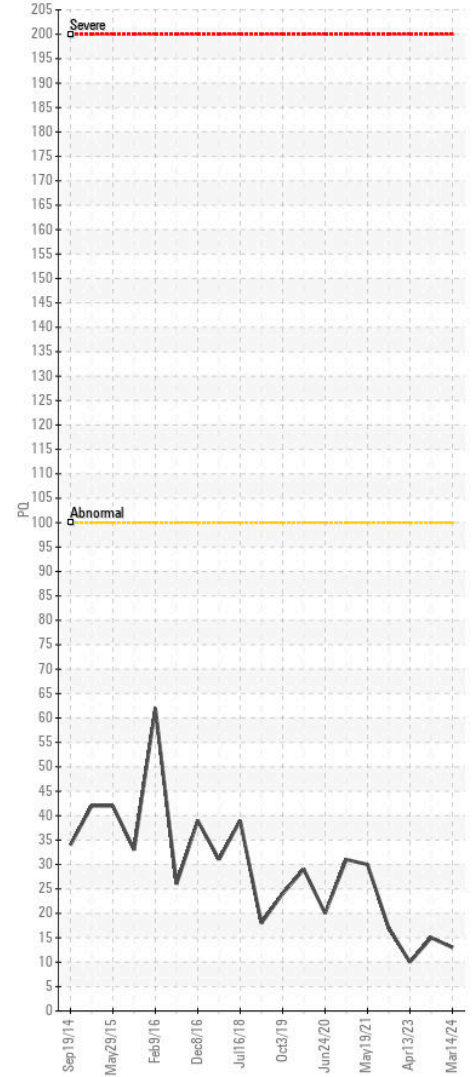

Viscosity @ 40°C

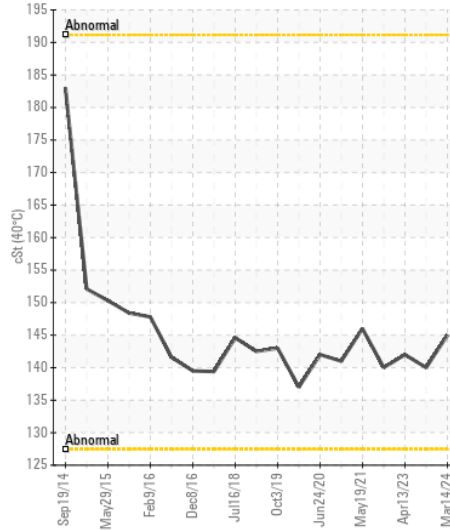

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0203487 **Received** : 19 Mar 2024  
**Lab Number** : 06122668 **Tested** : 20 Mar 2024  
**Unique Number** : 10936819 **Diagnosed** : 21 Mar 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269

Contact: CHARLOTTE SHOP  
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211  
 F: (704)596-6198