



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[688083]**  
Machine Id  
**VOLVO A30G 753001**  
Component  
**Bogie/Center Axle**  
Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP438335</b>	VCP446887	VCP432376
Sample Date		Client Info		<b>14 Mar 2024</b>	14 Feb 2024	12 Dec 2023
Machine Age	hrs	Client Info		<b>2475</b>	2293	1980
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	<b>65</b>	60	88
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>4</b>	2	3
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>2</b>	1	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	<1
Boron	ppm	ASTM D5185m	111	<b>167</b>	182	180
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0.9	<b>&lt;1</b>	<1	1
Manganese	ppm	ASTM D5185m	0.0	<b>1</b>	1	2
Magnesium	ppm	ASTM D5185m	39	<b>3</b>	<1	0
Calcium	ppm	ASTM D5185m	93	<b>95</b>	40	77
Phosphorus	ppm	ASTM D5185m	920	<b>940</b>	1044	1082
Zinc	ppm	ASTM D5185m	104	<b>38</b>	13	26
Sulfur	ppm	ASTM D5185m	20179	<b>28648</b>	28665	27620
Visc @ 40°C	cSt	ASTM D445	333	<b>310</b>	312	287

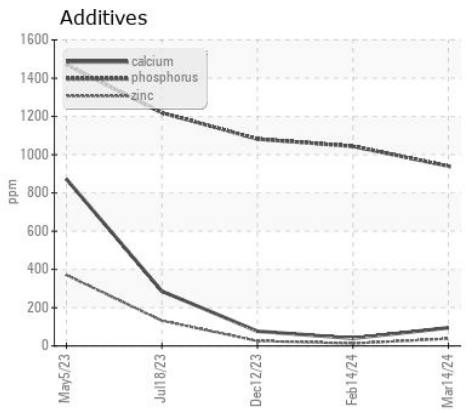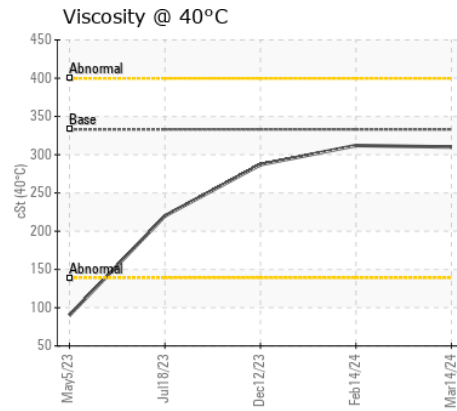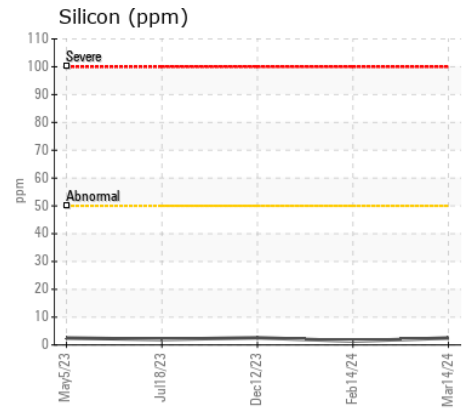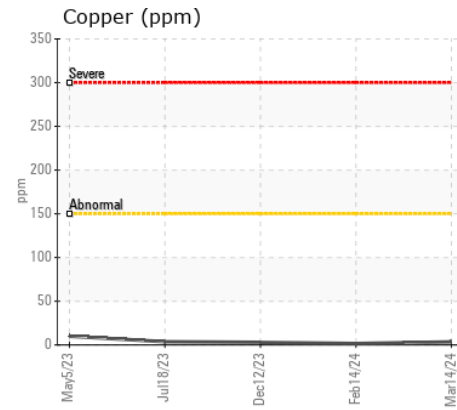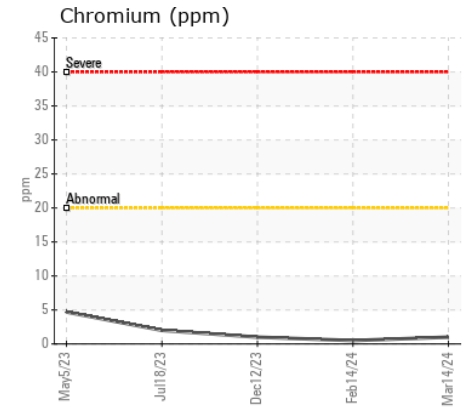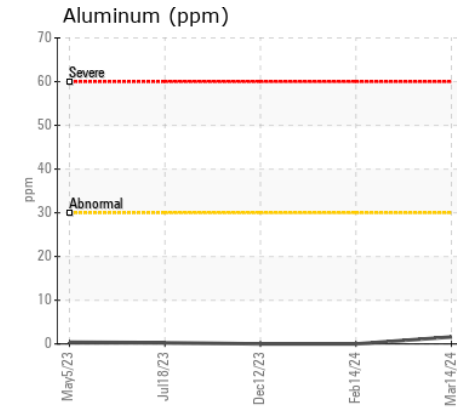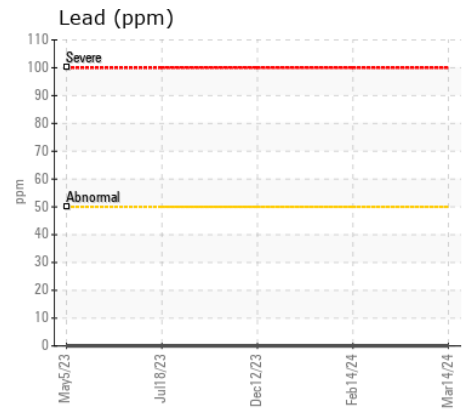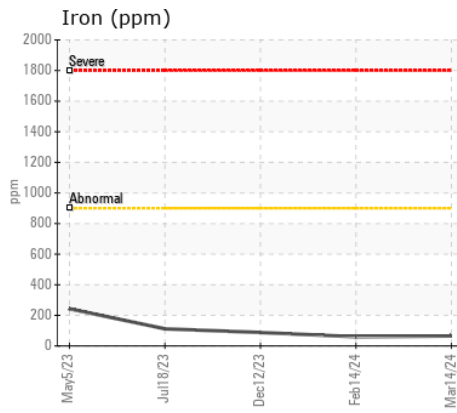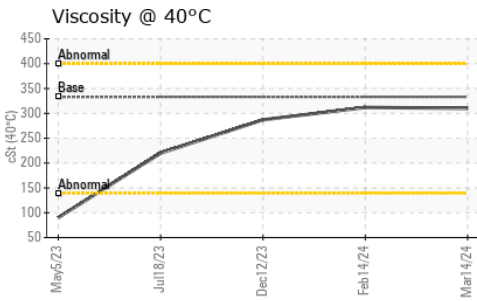

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP438335 **Received** : 19 Mar 2024  
**Lab Number** : 06122737 **Tested** : 20 Mar 2024  
**Unique Number** : 10936888 **Diagnosed** : 20 Mar 2024 - Wes Davis  
**Test Package** : MOB 1

**BLUE GOOSE GROWERS**  
 16059 W ORANGE AVE  
 FT PIERCE, FL  
 US 34945  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (772)461-3020

F: