



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[W/O 10493]**  
Machine Id  
**VOLVO L90H 625992**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON 15W40 (5 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0000015</b>	VCP429483	VCP413654
Sample Date		Client Info		<b>18 Mar 2024</b>	08 Jan 2024	18 Oct 2023
Machine Age	hrs	Client Info		<b>3546</b>	3093	2627
Oil Age	hrs	Client Info		<b>453</b>	0	0
Filter Age	hrs	Client Info		<b>453</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>15</b>	20	13
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	1	3
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	4	4
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>5</b>	4	6
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.6</b>	6.1	5.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.9</b>	20.9	21.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	<b>1</b>	<1	2
Boron	ppm	ASTM D5185m		<b>304</b>	378	409
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>108</b>	77	85
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>588</b>	385	414
Calcium	ppm	ASTM D5185m		<b>1525</b>	1362	1386
Phosphorus	ppm	ASTM D5185m		<b>842</b>	987	978
Zinc	ppm	ASTM D5185m		<b>1010</b>	1251	1281
Sulfur	ppm	ASTM D5185m		<b>3380</b>	3202	3396
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	14.9	15.0
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.1</b>	7.5	7.9
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.1</b>	13.1	13.5

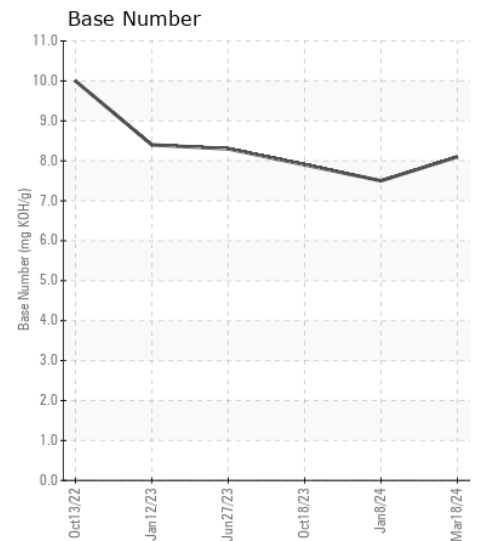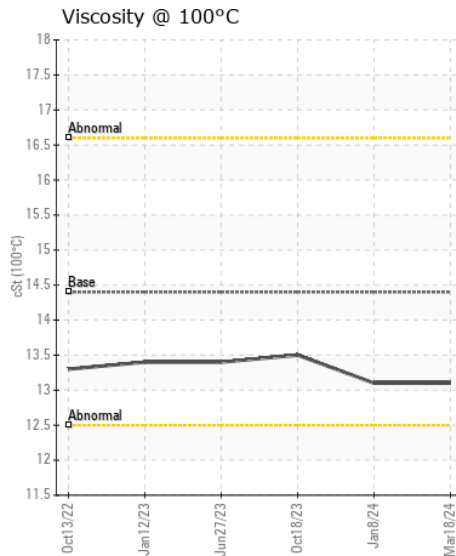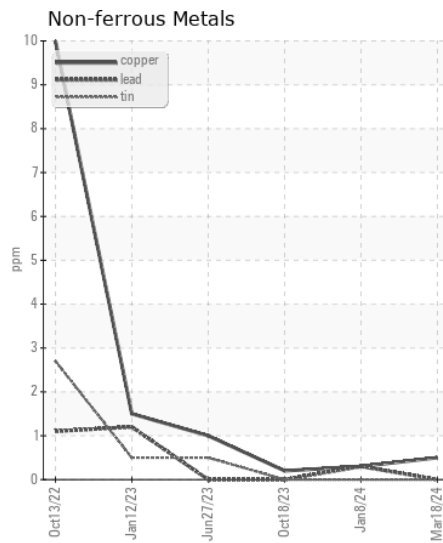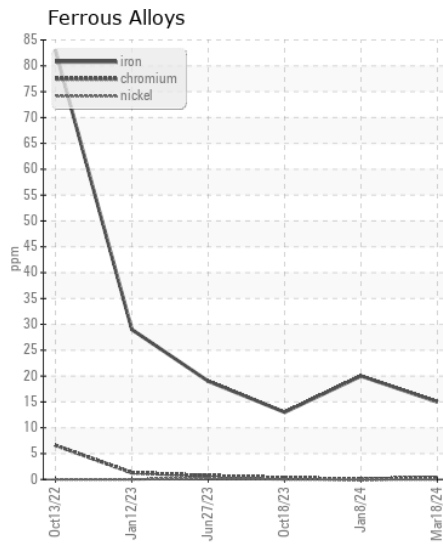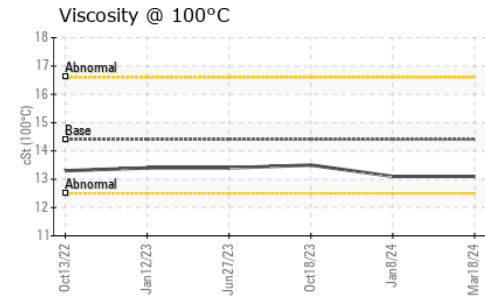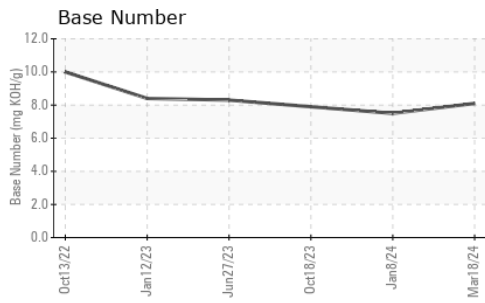

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000015 **Received** : 19 Mar 2024  
**Lab Number** : 06122950 **Tested** : 20 Mar 2024  
**Unique Number** : 10937101 **Diagnosed** : 21 Mar 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE**  
 4601 WASHINGTON BOULEVARD  
 BALTIMORE, MD  
 US 21227  
 Contact: MARK CIULLA  
 mciulla@mcclung-logan.com  
 T: (410)242-6500  
 F: (410)242-7835

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)