



# OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**FREIGHTLINER 13086**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 5W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>WC0915988</b>   | WC0838125   | WC0478061   |
| Sample Date    |     | Client Info |           | <b>06 Mar 2024</b> | 07 Nov 2023 | 27 Nov 2020 |
| Machine Age    | mls | Client Info |           | <b>181989</b>      | 0           | 67163       |
| Oil Age        | mls | Client Info |           | <b>0</b>           | 0           | 0           |
| Filter Age     | mls | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | N/A         | N/A         |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | N/A         | N/A         |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | ATTENTION   |

## WEAR

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >130 | <b>39</b>    | 16   | 27   |
| Chromium     | ppm    | ASTM D5185m | >10  | <b>&lt;1</b> | <1   | <1   |
| Nickel       | ppm    | ASTM D5185m | >4   | <b>0</b>     | 0    | <1   |
| Titanium     | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | <1   |
| Silver       | ppm    | ASTM D5185m | >2   | <b>0</b>     | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>5</b>     | 2    | 4    |
| Lead         | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | 0    | <1   |
| Copper       | ppm    | ASTM D5185m | >125 | <b>&lt;1</b> | <1   | 1    |
| Tin          | ppm    | ASTM D5185m | >4   | <b>&lt;1</b> | 0    | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

## CONTAMINATION







There is no indication of any contamination in the oil.

|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>7</b>       | 5     | 5     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>&lt;1</b>   | 3     | 6     |
| Fuel             |          | WC Method   | >3.0  | <b>&lt;1.0</b> | <1.0  | ▲ 2.0 |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >6    | <b>0.6</b>     | 0.4   | 0.7   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>15.2</b>    | 11.6  | 10.5  |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>32.1</b>    | 23.0  | 22    |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |        |
|------------------|----------|-------------|------|--------------|------|--------|
| Sodium           | ppm      | ASTM D5185m | >44  | <b>1</b>     | 1    | 1      |
| Boron            | ppm      | ASTM D5185m | 250  | <b>123</b>   | 2    | 10     |
| Barium           | ppm      | ASTM D5185m | 10   | <b>0</b>     | 0    | 0      |
| Molybdenum       | ppm      | ASTM D5185m | 100  | <b>134</b>   | 65   | 66     |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | <1   | <1     |
| Magnesium        | ppm      | ASTM D5185m | 450  | <b>855</b>   | 999  | 798    |
| Calcium          | ppm      | ASTM D5185m | 3000 | <b>1985</b>  | 1152 | 1293   |
| Phosphorus       | ppm      | ASTM D5185m | 1150 | <b>942</b>   | 1063 | 1038   |
| Zinc             | ppm      | ASTM D5185m | 1350 | <b>1144</b>  | 1378 | 1275   |
| Sulfur           | ppm      | ASTM D5185m | 4250 | <b>3525</b>  | 3108 | 2862   |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>36.2</b>  | 22.2 | 16.2   |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 8.5  | <b>5.6</b>   | 7.3  | 8.4    |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.4 | <b>14.1</b>  | 12.6 | ● 12.4 |

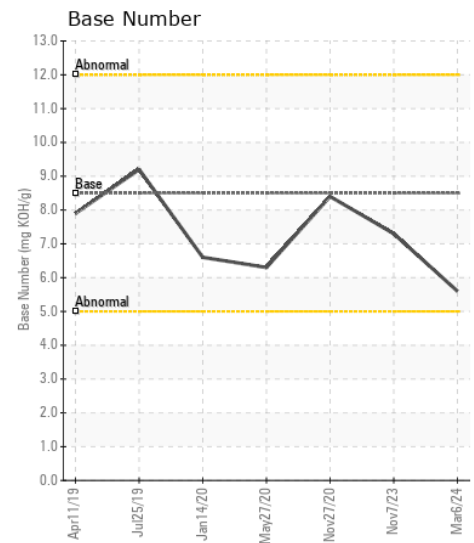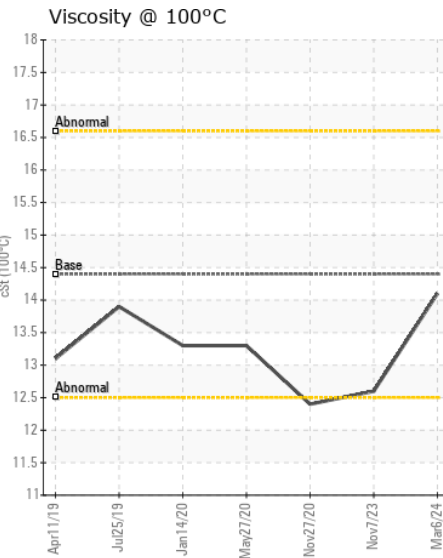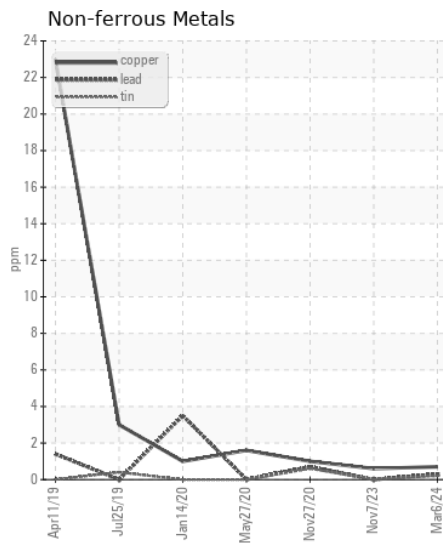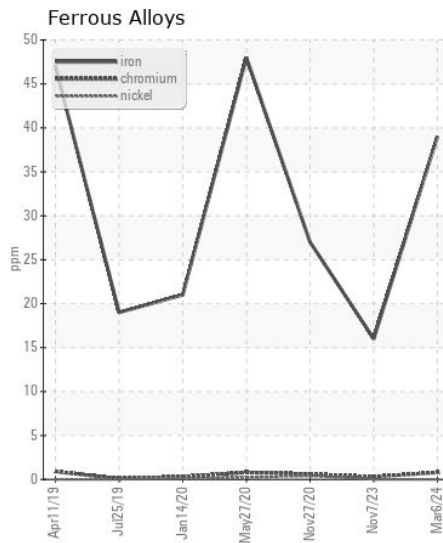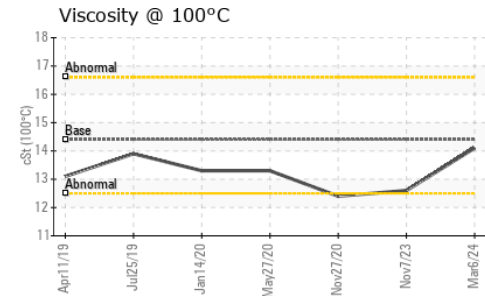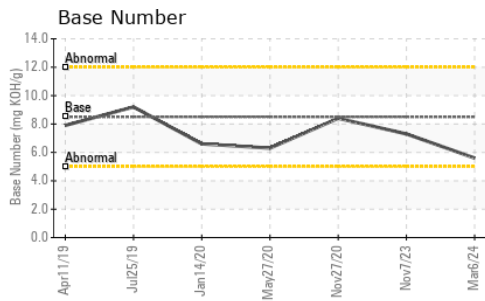

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0915988  
**Lab Number** : 06123039  
**Unique Number** : 10937190  
**Test Package** : FLEET

**Received** : 19 Mar 2024  
**Tested** : 20 Mar 2024  
**Diagnosed** : 21 Mar 2024 - Don Baldrige

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105  
 Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com  
 T: (336)767-9642  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)