



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CONNWELD 8X20 4 DECK CONNWELD EAST SCREEN NORTH TUBE (S/N 1-1910052)

Component
Gearbox

Fluid
DA SYNTHETIC ISO 150 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10003363	TO10002052	---
Sample Date		Client Info		11 Mar 2024	02 Sep 2023	---
Machine Age	hrs	Client Info		9000	0	---
Oil Age	hrs	Client Info		1000	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
		ASTM D8184		151	113	---
Iron	ppm	ASTM D5185m	>200	127	▲ 309	---
Chromium	ppm	ASTM D5185m	>15	<1	2	---
Nickel	ppm	ASTM D5185m	>15	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	0	---
Lead	ppm	ASTM D5185m	>100	0	<1	---
Copper	ppm	ASTM D5185m	>200	1	3	---
Tin	ppm	ASTM D5185m	>25	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	9	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	0	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		4	0	---
Manganese	ppm	ASTM D5185m		2	5	---
Magnesium	ppm	ASTM D5185m		3	4	---
Calcium	ppm	ASTM D5185m		36	29	---
Phosphorus	ppm	ASTM D5185m		170	143	---
Zinc	ppm	ASTM D5185m		5	13	---
Sulfur	ppm	ASTM D5185m		11452	3918	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.32	0.41	---
Visc @ 40°C	cSt	ASTM D445		151	154	---
Visc @ 100°C	cSt	ASTM D445		14.4	14.6	---
Viscosity Index (VI)	Scale	ASTM D2270		92	92	---

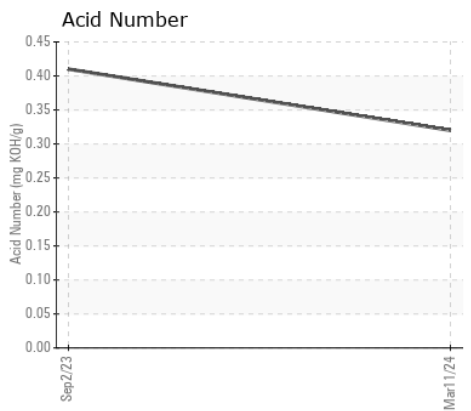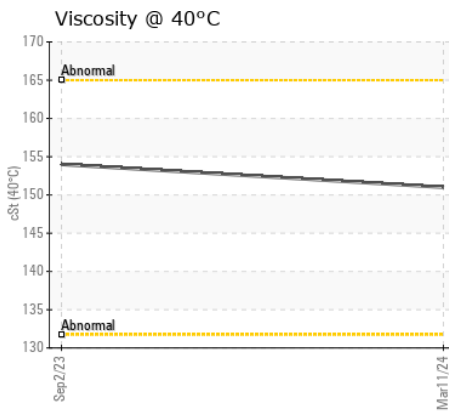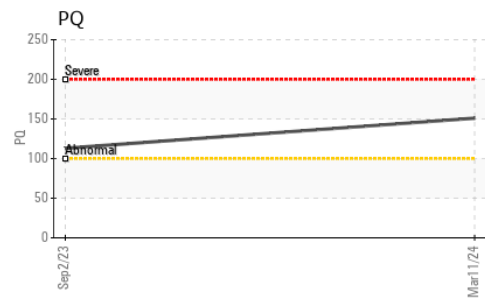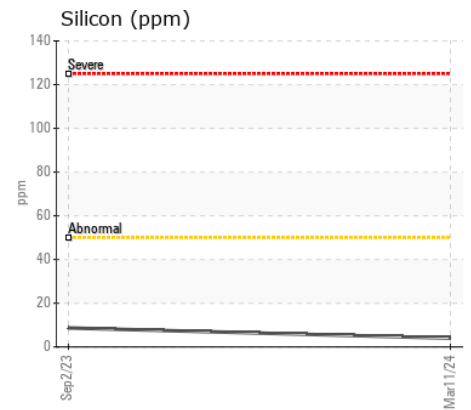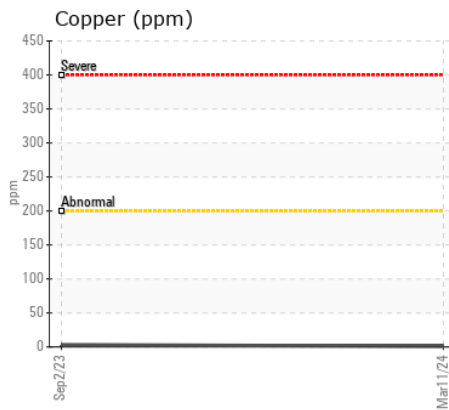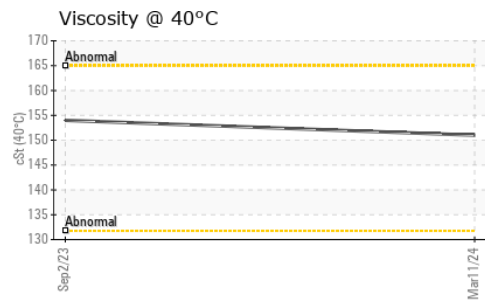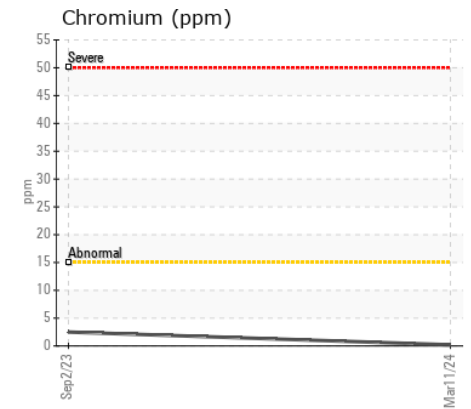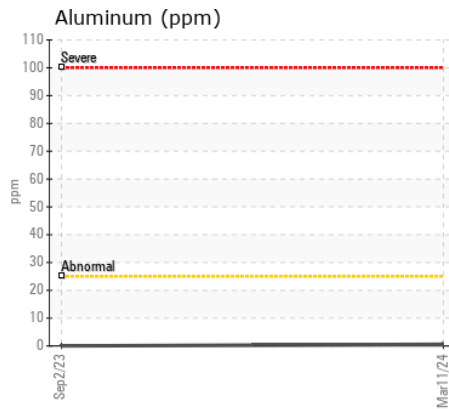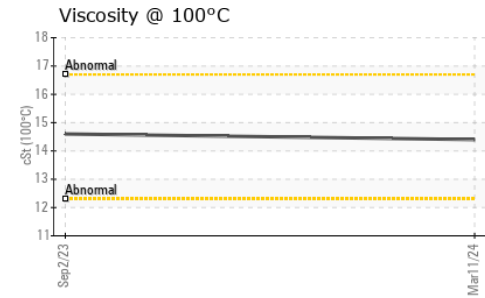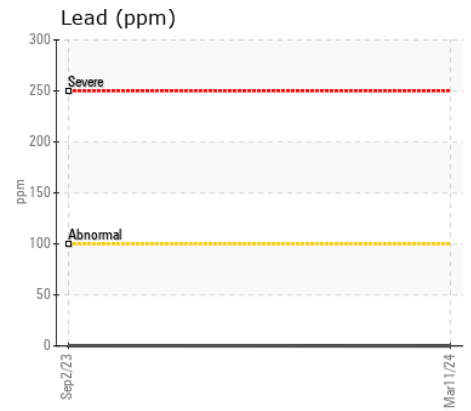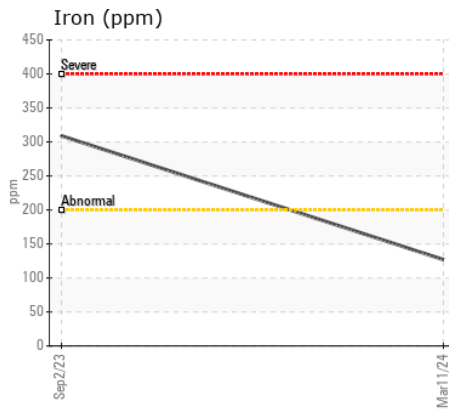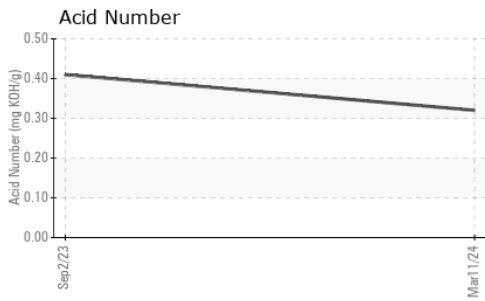

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TO10003363

Lab Number : 06123223

Unique Number : 10937374

Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

Received : 19 Mar 2024

Tested : 20 Mar 2024

Diagnosed : 22 Mar 2024 - Jonathan Hester

ANCHOR STONE TULSA ROCK

TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE

TULSA, OK

US 74137

Contact: MIKE SNYDER

msnyder@anchorstoneco.com

T: (417)850-9635

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)