



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area
(44J6UM)
Machine Id
720023-310080
Component
Transmission (Auto)
Fluid
PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0114028	GFL0114093	GFL0090671
Sample Date		Client Info		15 Mar 2024	06 Mar 2024	21 Sep 2023
Machine Age	hrs	Client Info		9564	9498	8568
Oil Age	hrs	Client Info		0	0	8568
Filter Age	hrs	Client Info		1200	1200	1210
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	129	44	139
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	34	9	▲ 58
Lead	ppm	ASTM D5185m	>50	8	2	10
Copper	ppm	ASTM D5185m	>225	16	8	15
Tin	ppm	ASTM D5185m	>10	3	1	4
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is a moderate amount of visible silt present in the sample.

Silicon	ppm	ASTM D5185m	>20	18	8	10
Potassium	ppm	ASTM D5185m	>20	6	6	5
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	▲ MODER	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		8	11	15
Boron	ppm	ASTM D5185m		78	29	73
Barium	ppm	ASTM D5185m		<1	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		1	<1	2
Magnesium	ppm	ASTM D5185m		3	5	<1
Calcium	ppm	ASTM D5185m		152	135	79
Phosphorus	ppm	ASTM D5185m		260	234	237
Zinc	ppm	ASTM D5185m		7	61	8
Sulfur	ppm	ASTM D5185m		1825	1736	1176
Visc @ 40°C	cSt	ASTM D445	34	32.3	38.3	34.3

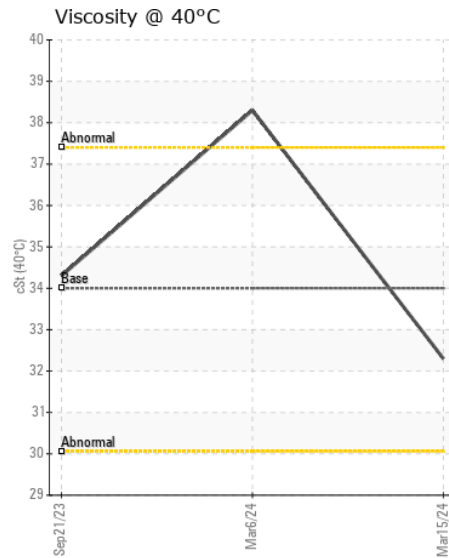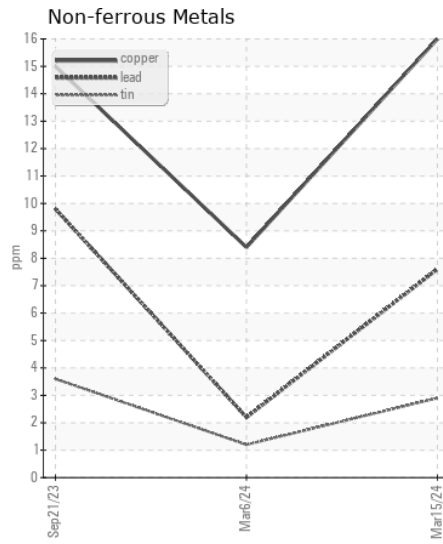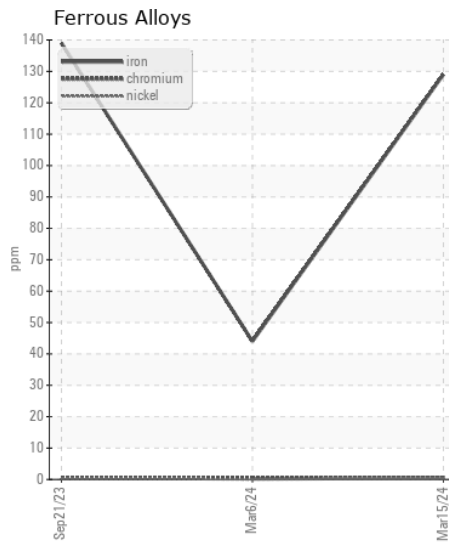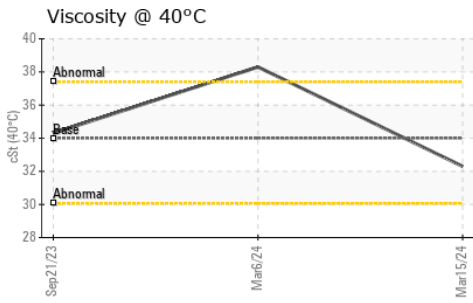

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0114028
Lab Number : 06123267
Unique Number : 10937418
Test Package : FLEET

Received : 19 Mar 2024
Tested : 20 Mar 2024
Diagnosed : 22 Mar 2024 - Jonathan Hester

GFL Environmental - 837 - Harrison TS
 22820 S State Route 291
 Harrisonville, MO
 US 64701
 Contact: JOHNNY PEREZ
 johnny.perez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: